

EMBRAER S.A.
12227-901 SAO JOSE DOS CAMPOS - S.P.
BRAZIL
PHONE: + 55 12 3927-7517
<http://www.flyembraer.com>
e-mail: distrib@embraer.com.br

AIRPORT PLANNING MANUAL

In connection with the use of this document, Embraer does not provide any express or implied warranties and expressly disclaims any warranty of merchantability or fitness for a particular purpose.

This document contains trade secrets, confidential, proprietary information of Embraer and technical data subject to U.S. Export Administration Regulation ("EAR") and other countries export control laws and regulations. Diversion contrary to the EAR and other laws and regulations is strictly forbidden. The above restrictions may apply to data on all pages of this document.

APM - 5824
22 SEPTEMBER 2017
REVISION 21 - 05 AUGUST 2022



TABLE OF CONTENTS

<u>SUBJECT</u>	<u>REVISION STATUS</u>	<u>REVISION DATE</u>
RECORD OF REVISIONS	R	Aug 05/22
HIGHLIGHTS	R	Aug 05/22
INTRODUCTION	R	Aug 05/22
SECTION 01 General Information	U	Sep 22/17
SECTION 02 Aircraft Description	R	Aug 05/22
SECTION 03 Aircraft Performance	U	Aug 06/21
SECTION 04 Ground Maneuvering	U	Aug 06/21
SECTION 05 Terminal Servicing	U	Nov 12/21
SECTION 06 Operation Conditions	R	Aug 05/22
SECTION 07 Pavement Data	U	Aug 06/21
SECTION 08 Possible EMBRAER 196 Derivative Aircraft	U	Aug 10/18
SECTION 09 Scaled Drawings	U	Aug 06/21

Revision Status: U - Unchanged, R - Revised, N - New, D - Deleted

E-JETS E2 - APM 5824

TOC

Page 1 of 1
Rev 21 - Aug 05/22

LIST OF EFFECTIVE AIRCRAFT

The following list provides a cross-reference table of the aircraft to which the information contained in this manual is applicable.

Commercial Designation		Customer Aircraft Number		Manufacturer Serial Number		Aircraft Registration Number
E190-E2		EW 001		19020001		TBD
E190-E2		EW 002		19020002		TBD
E190-E2		EW 003		19020003		TBD
E190-E2		EW 004		19020004		TBD
E195-E2		EZ 001		19020005		TBD
E175-E2		EY 001		19020006		TBD
E175-E2		EY 002		19020007		TBD
E175-E2		EY 003		19020008		TBD
E190-E2		WI 001		19020009		LN-WEA
E190-E2		WI 002		19020010		LN-WEB
E190-E2		WI 003		19020011		LN-WEC
E190-E2		KZ 001		19020012		P4-KHA
E190-E2		KZ 002		19020013		P4-KHB
E190-E2		KZ 003		19020014		P4-KHC
E190-E2		BH 001		19020015		LN-WEX
E190-E2		CW 001		19020016		TBD
E190-E2		KZ 004		19020017		P4-KHD
E195-E2		ZL 001		19020018		PR-PJN
E190-E2		KZ 005		19020019		P4-KHE
E195-E2		ZL 002		19020020		PS-AEA
E195-E2		ZL 003		19020021		PS-AEB
E190-E2		HT 001		19020022		HB-AZA
E195-E2		NT 001		19020023		EC-NEZ
E195-E2		NT 002		19020024		EC-NFA
E195-E2		ZL 004		19020025		PS-AEC
E190-E2		HT 002		19020026		HB-AZB
E195-E2		NT 003		19020027		EC-NHA
E195-E2		ZL 005		19020028		PS-AED
E190-E2		KI 001		19020029		VH-IKJ
E190-E2		HT 003		19020030		HB-AZC
E190-E2		HT 004		19020031		HB-AZD
E195-E2		ZL 006		19020032		PS-AEE
E195-E2		ZL 007		19020033		PS-AEF
E195-E2		ZL 008		19020034		PS-AEG
E195-E2		ZL 009		19020035		PS-AEH
E190-E2		HT 007		19020036		HB-AZG
E190-E2		HT 005		19020038		HB-AZE
E195-E2		PE 001		19020039		5N-BYF
E195-E2		PE 002		19020040		5N-BYG
E195-E2		EZ 002		19020041		PR-ZIQ
E195-E2		BI 001		19020042		EW-555PO
E190-E2		HT 006		19020043		HB-AZF
E195-E2		PE 003		19020044		5N-BYH
E195-E2		KF 001		19020045		PH-NXA
E190-E2		HT 008		19020046		HB-AZH

Commercial Designation		Customer Aircraft Number		Manufacturer Serial Number		Aircraft Registration Number
E195-E2		KF 002		19020047		PH-NXB
E195-E2		NT 004		19020048		EC-NNV
E195-E2		BI 002		19020049		EW-563PO
E195-E2		PE 004		19020050		5N-BYI
E195-E2		KG 001		19020051		PH-NXC
E195-E2		PE 005		19020052		5N-BYJ
E195-E2		BI 003		19020053		EW-560PO
E195-E2		KG 002		19020054		PH-NXD
E195-E2		HS 001		19020055		HB-AZI
E195-E2		NT 005		19020056		EC-NPU
E195-E2		HS 002		19020057		HB-AZJ
E195-E2		HS 003		19020058		HB-AZK
E195-E2		HS 004		19020059		HB-AZL
E195-E2		KF 003		19020060		PH-NXE
E195-E2		KG 003		19020061		PH-NXF
E195-E2		KG 004		19020062		PH-NXG
E195-E2		KG 005		19020063		TBD
E195-E2		KG 006		19020064		TBD
E195-E2		KF 004		19020065		TBD
E195-E2		KF 005		19020066		TBD
E195-E2		KG 007		19020067		TBD
E190-E2		CW 002		19020068		TBD
E195-E2		PO 001		19020069		C-GKQJ
E195-E2		PO 002		19020070		TBD
E195-E2		PO 003		19020071		TBD
E195-E2		PO 004		19020072		TBD
E195-E2		PE 006		19020073		TBD
E195-E2		PO 005		19020074		TBD
E195-E2		PO 006		19020075		TBD
E195-E2		ZC 001		19020076		TBD
E195-E2		PO 007		19020077		TBD
E195-E2		KG 008		19020078		KG
E195-E2		ZC 002		19020079		TBD
E195-E2		PO 008		19020080		TBD
E195-E2		ZL 010		19020081		TBD
E195-E2		PO 009		19020082		TBD
E195-E2		ZL 011		19020083		TBD
E195-E2		KG 009		19020084		TBD
E195-E2		KG 010		19020085		TBD
E195-E2		PO 010		19020086		TBD
E195-E2		PO 011		19020087		TBD
E195-E2		ZC 003		19020088		TBD
E195-E2		ZL 012		19020089		TBD
E195-E2		PO 012		19020090		TBD
E195-E2		ZL 013		19020091		TBD
E195-E2		ZL 014		19020092		TBD
E195-E2		KG 011		19020093		TBD
E195-E2		PO 013		19020094		TBD
E195-E2		PO 014		19020095		TBD

Commercial Designation		Customer Aircraft Number		Manufacturer Serial Number		Aircraft Registration Number
E195-E2		KF 006		19020097		TBD
E195-E2		PO 015		19020098		TBD
E195-E2		PO 016		19020099		TBD
E195-E2		KF 007		19020100		KF
E195-E2		PO 017		19020101		TBD
E195-E2		PO 018		19020102		TBD
E195-E2		PO 019		19020104		TBD
E195-E2		PO 020		19020105		TBD
E195-E2		PO 021		19020107		TBD
E195-E2		PO 022		19020108		TBD
E195-E2		PE 007		19020109		TBD
E195-E2		PO 023		19020110		TBD
E195-E2		PO 024		19020111		TBD
E195-E2		PO 025		19020112		TBD
E195-E2		PO 026		19020113		TBD
E195-E2		PO 027		19020114		TBD
E190-E2		KI 002		19020116		TBD
E195-E2		PE 008		19020117		TBD
E195-E2		PO 028		19020118		TBD
E195-E2		PO 029		19020119		TBD
E195-E2		PO 030		19020120		TBD
E195-E2		KG 012		19020122		TBD
E195-E2		KG 013		19020123		TBD
E195-E2		PE 009		19020124		TBD
E195-E2		PE 010		19020129		TBD

RECORD OF REVISIONS

This list is intended to show the Operator the cumulative issued revisions to his manual. The list consists of the revision number and the respective issuance date.

REV NO.	ISSUE DATE
0	Sep 22/17
1	Oct 27/17
2	Nov 24/17
3	Dec 15/17
4	Jan 12/18
5	Feb 09/18
6	Mar 09/18
7	Apr 20/18
8	May 11/18
9	Jun 08/18
10	Aug 10/18
11	Nov 09/18
12	Feb 08/19
13	May 10/19
14	Aug 09/19
15	Sep 27/19
16	Feb 07/20
17	May 08/20
18	Nov 06/20
19	Aug 06/21
20	Nov 12/21
21	Aug 05/22

HIGHLIGHTS

The table below lists the contents that have been technically revised in the current revision of this manual. Other revised contents, if any, that do not appear in the table below are considered editorially revised, they having no technical implications.

SUBJECT	DESCRIPTION
SECTION -02	Updated cargo compartment volume for Embraer 190E2 and 195E2
SECTION -06	Updated figure for Hazard Areas - Ground Idle and Take-off Power.

INTRODUCTION

1. Applicability

The table below provides a cross-reference between the commercial and certification designations of the aircraft:

Table 1

AIRCRAFT COMMERCIAL DESIGNATION	AIRCRAFT CERTIFICATION DESIGNATION
E190-E2	ERJ 190-300
E195-E2	ERJ 190-400

2. General

The APM has been prepared in accordance with NAS 3601.

It provides aircraft characteristics for general airport planning, airport operators, airlines, and engineering consultant organizations.

The APM is arranged as shown in the table below:

3. APM Arrangement

The APM is arranged as shown in the table below:

Table 2 - APM Arrangement

ARRANGEMENTS	CONTENTS
Manual Front Matter	Title Page
	Highlights
	Record of Revision
	List of Effective Aircraft
	Table of Contents
	Introduction
Section	General Information
	Aircraft Description
	Aircraft Performance
	Ground Maneuvering
	Terminal Servicing
	Operating Conditions
	Pavement Data
	Possible Derivative Aircraft
	Scaled Drawings

The front matter for the whole manual contains:

A. Title Page

Shows the manufacturer's masthead, identification of the manual, the initial issue date, and revision number and date.



B. Highlights

It is a document that accompanies the manual revision and contains the detailed description of the technical reasons that lead to the revision. It provides the operator with a clear view of technical issue of the revision.

C. Record of Revision

Lists the successive revision numbers, issue date, insertion date and incorporators initials, which must be kept current by the operator.

D. List of Effective Aircraft

It provides a cross-reference tabulation of commercial designation, customer aircraft number, manufacturing serial number and aircraft registration number.

E. Table of Contents

Lists front matter content with the latest issue dates and provides information to let the reader to quickly and accurately locate the material sought.

F. Introduction

This section present a description of the publication with:

1. General

The general subsection describes the APM objectives and the directions for Customers queries.

2. APM Arrangement

This subsection present the APM arrangement as regard to its front matter and sections contents.

Queries concerning any printed material, including purchasing, copying, shipping and handling, complaints, or compliments may be addressed to:

Technical Publications Distribution:

Embraer S.A.

Attention of: Technical Publications Department

CEP. 12.227-901- São José dos Campos - SP - Brazil

Phone: (55 12) 3927-7517

<http://www.embraer.com> e-mail

distrib@embraer.com.br

For support regarding technical information contained in non-operational publication, please contact:

Routine Issues: Contact Embraer Customer Support Service

AOG Issues: Contact Embraer AOG group directly

4. Revisions

Embraer may revise this manual periodically as required to update information or provide information not available at the time of printing. Revised data may result from Embraer approved aircraft modifications and new available options. Changes to the text are indicated by a black bar in the page left-side margin, beside the revised, added, or deleted material. Relocated or rearranged text or illustrations will be indicated by a black bar beside the page number.

5. Acronyms and Abbreviations

The abbreviations shall be automatically generated by the editing system, and shall present all the acronyms and abbreviations, used throughout the manual sections.

6. Abbreviations

This list gives all the abbreviations, acronyms and measurement units used in this manual with their definitions.

Table 3 - List of Acronyms and Abbreviations used in the APM

ACRONYMS AND ABBREVIATIONS	DESCRIPTION
°C	Degree Celsius
°F	Degree Fahrenheit
ℓ	Liter
ACN	Aircraft Classification Number
AFM	Airplane Flight Manual
AOM	Airplane Operations Manual
APU	Auxiliary Power Unit
AR	As Required
CBR	California Bearing Rating
ECS	Environmental Control System
FAA	Federal Aviation Administration
FWD	Forward
ICAO	International Civil Aviation Organization
ISA	International Standard Atmosphere
LCN	Load Classification Number
LH	Left-Hand
MLW	Maximum Landing Weight
MRW	Maximum Ramp Weight
MTBF	Mean Time Between Failures
MTOW	Maximum Takeoff Weight
MZFW	Maximum Zero Fuel Weight
N	Newton
RH	Right-Hand
STD	Standard
dBA	A-Weighted Decibel
ft	Foot
ft ³	Cubic Foot
gal	Gallon
in	Inch
inHg	Inch of Mercury
kPa	Kilopascal



(Continued)

Table 3 - List of Acronyms and Abbreviations used in the APM

ACRONYMS AND ABBREVIATIONS	DESCRIPTION
kg	Kilogram
lb	Pound
m	Meter
m ³	Cubic Meter
min	Minute
psi	pound per square inch

1. GENERAL INFORMATION

EFFECTIVITY: ALL

1.1. GENERAL

This document provides airplane characteristics for general airport planning. Since the operational practices vary among the airlines, specific data should be coordinated with the using airlines before the facility design is made.

The APM sections are presented as follows:

1.1.1. Section 1 - General Information

This section present general information applicable to all APM sections, and also scale aircraft drawing and possible derivative aircraft required on NAS 3601.

1.1.2. Section 2 - Aircraft Description

This section present the aircraft characteristics, general aircraft dimensions, ground clearances, interior arrangements, passenger cabin cross section, lower compartment containers, door clearances.

1.1.3. Section 3 - Aircraft Performance

This section present the general information, payload x range charts, takeoff field lengths and landing field lengths.

1.1.4. Section 4 - Ground Maneuvering

This section present the general information, turning radii for various nose landing gear steering angles, visibility from cockpit in static position, the minimum dimensions for runway and taxiway where the aircraft can be operated and runway holding apron.

1.1.5. Section 5 - Terminal Servicing

This section present the terminal servicing information, the typical arrangements of equipment during turnaround, the typical turnaround servicing time at an air terminal, the locations of ground servicing connections in graphic and tabular forms, the typical sea level air pressure and flow requirements for starting the engine, the air conditioning requirements and the ground towing requirements for various towing conditions.

1.1.6. Section 6 - Operation Conditions

This section provides the jet engine exhaust velocities and temperatures charts; the airport and community noise levels and the hazard areas charts.

1.1.7. Section 7 - Pavement Data

This section provides the general information with a brief description of the pavement charts which will be helpful in their use for airport planning. Each aircraft configuration is depicted with a minimum range of five loads imposed on the main landing gear to aid in the interpolation between the discrete values shown. The tire pressure used for the aircraft charts will produce the recommended tire deflection with the aircraft loaded to its maximum ramp weight and with center of gravity position. The tire pressure, where specifically designated in tables and on charts, are values obtained under loaded conditions as certificated for commercial use.

This section is presented as follows:

- The basic data on the landing gear footprint configuration, maximum design ramp loads, and tire sizes and pressures.

- The maximum pavement loads for certain critical conditions at the tire-ground interfaces.
- A chart in order to determine the loads throughout the stability limits of the aircraft at rest on the pavement.
Pavement requirements for commercial aircraft are customarily derived from the static analysis of loads imposed on the main landing gear struts.
These main landing gear loads are used to enter the pavement design charts which follow, interpolating load values where necessary.
- The flexible pavement curves prepared in accordance with the US Army Corps of Engineers Design Method and the LCN Method.
- The rigid pavement design curves in accordance with the Portland Cement Association Design Method and the LCN Method.
- The aircraft ACN values for flexible and rigid pavements.

1.1.8. Section 8 - Possible Embraer 190 E2 Derivative Aircraft

This sections provides information about derivative versions of the currently developed.

1.1.9. Section 9 - Scaled Drawings

This sections provides views to the following scales:

- English/American Customary Weights and Measures.
1 inch = 32 feet
1 inch = 50 feet
1 inch = 100 feet
- Metric.
1:500
1:1000

2. **AIRCRAFT DESCRIPTION**

EFFECTIVITY: ALL

2.1. **AIRCRAFT CHARACTERISTICS**

The aircraft is:

- Low winged;
- Conventional tail design;
- Two wing-mounted engines;

The PW1714G is the standard engine for the EMBRAER 175 E2.

The PW1919G is the standard engine for the EMBRAER 190 E2.

The PW1921G is the standard engine for the EMBRAER 195 E2.

The STD aircraft model has the following design weights:

2.1.1. Basic Characteristics

EFFECTIVITY: EMBRAER 190-E2 ACFT

- Maximum ramp weight of 56600 kg (124781 lb)
- Maximum take-off weight of 56400 kg (124340 lb)
- Maximum landing weight of 49050 kg (108136 lb)
- Maximum zero fuel weight of 46700 kg (102956 lb)
- Maximum usable fuel of 13500 kg (29762 lb)

2.1.2. Basic Characteristics

EFFECTIVITY: EMBRAER 195-E2 ACFT

- Maximum ramp weight of 61700 kg (136025 lb)
- Maximum take-off weight of 61500 kg (128419 lb)
- Maximum landing weight of 54000 kg (116734 lb)
- Maximum zero fuel weight of 51850 kg (111002 lb)
- Maximum usable fuel of 13690 kg (30181 lb)

2.1.3. Basic Characteristics

EFFECTIVITY: EMBRAER 175-E2 ACFT

- Maximum ramp weight of kg (lb)
- Maximum take-off weight of 44600 kg (98326 lb)
- Maximum landing weight of 40000 kg (88184 lb)
- Maximum zero fuel weight of 37700 kg (83114 lb)
- Maximum usable fuel of 8645 kg (19058 lb)

2.1.4. Definitions

MRW

It is the maximum allowed aircraft weight for taxiing or maneuvering on the ground.

MLW

It is the maximum allowed weight at which the aircraft may normally be landed.

MTOW

It is the maximum allowed total loaded aircraft weight at the start of the takeoff run.

MZFW

It is the maximum allowed weight without usable fuel in tanks.

Maximum Seating Capacity

It is the maximum number of passengers specifically certified or anticipated for certification.

Maximum Cargo Volume

It is the maximum space available for cargo.

Usable Fuel

Fuel available for the aircraft propulsion.

Table 2.1 - Aircraft General Characteristics

Effectivity: EMBRAER 190-E2 ACFT

DESIGN WEIGHTS ^[1] ^[2]	AIRCRAFT MODEL
	STD
MRW	56600 kg (124781 lb)
MTOW	56400 kg (124341 lb)
MLW	49050 kg (108137 lb)
MZFW	46700 kg (102956 lb)
Maximum Seating Capacity	114 Passengers
Maximum Cargo Volume ^[3]	21.54 m ³ (76067.8 ft ³)
Maximum Usable Fuel ^[4]	13500 kg (29760 lb)
	16800 ℓ (4440 gal.)

[1] Applicable for standard models. For further information, refer to AFM and AOM.

[2] Typical standard configuration (weights may vary according to optional equipment installed or interior layouts).

[3] Standard configuration (volume may vary according to optional equipment installed).

[4] Based on 0.803 kg /ℓ (6.71 lb/gal) fuel density. Fuel density varies from 0.785 to 0.811 kg/ℓ (6.55 to 6.77 lb/gal) at 15 °C.

Table 2.2 - Aircraft General Characteristics
Effectivity: EMBRAER 195-E2 ACFT

DESIGN WEIGHTS ^[1] ^[2]	AIRCRAFT MODEL
	STD
MRW	61700 kg (136058 lb)
MTOW	61500 kg (135584.6 lb)
MLW	54000 kg (119049.6 lb)
MZFW	51850 kg (114309 lb)
Maximum Seating Capacity	146 Passengers
Maximum Cargo Volume ^[3]	29.97 m ³ 1058 ft ³)
Maximum Usable Fuel ^[4]	13690 kg (30181 lb) 17060 ℓ (4507 gal.)

[1] Applicable for standard models. For further information, refer to AFM and AOM.

[2] Typical standard configuration (weights may vary according to optional equipment installed or interior layouts).

[3] Standard configuration (volume may vary according to optional equipment installed).

[4] Based on 0.803 kg /ℓ (6.71 lb/gal) fuel density. Fuel density varies from 0.785 to 0.811 kg/ℓ (6.55 to 6.77 lb/gal) at 15 °C.

Table 2.3 - Aircraft General Characteristics
Effectivity: EMBRAER 175-E2 ACFT

DESIGN WEIGHTS ^[1] ^[2]	AIRCRAFT MODEL
	STD
MRW	kg (lb)
MTOW	44600 kg (98326 lb)
MLW	40000 kg (88184lb)
MZFW	37700 kg (83114lb)
Maximum Seating Capacity	90 Passengers
Maximum Cargo Volume ^[3]	17.07 m ³ (60282.1ft ³)
Maximum Usable Fuel ^[4]	8645 kg (19058lb) 10659 ℓ (2815gal.)

[1] Applicable for standard models. For further information, refer to AFM and AOM.

[2] Typical standard configuration (weights may vary according to optional equipment installed or interior layouts).

[3] Standard configuration (volume may vary according to optional equipment installed).

[4] Based on 0.811 kg /ℓ (lb/gal) fuel density. Fuel density varies from 0.785 to 0.811 kg/ℓ (6.55 to 6.77 lb/gal) at 15 °C.

2.2. **GENERAL AIRCRAFT DIMENSIONS**

2.2.1. External Dimensions

EFFECTIVITY: EMBRAER 190-E2 ACFT

- Span over Swept Back Wingtip - 33.72 m (110 ft 7.6 in)
- Height (maximum) - 10.95 m (35 ft 11.2 in)
- Overall length - 36.24 m (118 ft 11 in.)



2.2.2. External Dimensions

EFFECTIVITY: EMBRAER 195-E2 ACFT

- Span over Swept Back Wingtip - 35.12 m (115 ft 2.7 in)
- Height (maximum) - 10.78 m (35 ft 4.4 in)
- Overall length - 41.60 m (136 ft 5.76 in.)

2.2.3. External Dimensions

EFFECTIVITY: EMBRAER 175-E2 ACFT

- Span over Swept Back Wingtip - 31.39 m (102 ft 11.9 in)
- Height (maximum) - 10.18 m (33 ft 5 in)
- Overall length 32.37 m (106 ft 2.2 in.)

2.2.4. Wing

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

- Reference area - 103 m² (1108.68 ft²)
- Reference aspect ratio - 9.4

2.2.5. Wing

EFFECTIVITY: EMBRAER 175-E2 ACFT

- Reference area - 82 m² (ft²)
- Reference aspect ratio - 9.5

2.2.6. Fuselage

EFFECTIVITY: EMBRAER 190-E2 ACFT

- Total length - 36.2 m (118 ft 2.7 in)
- Length of pressurized section - 29.1 m (95 ft 5.64 in)

2.2.7. Fuselage

EFFECTIVITY: EMBRAER 195-E2 ACFT

- Total length - 41.6 m (136 ft 5.76 in)
- Length of pressurized section - 34.3 m (112ft 6.36 in)

2.2.8. Fuselage

EFFECTIVITY: EMBRAER 175-E2 ACFT

- Total length - 32.366 m (106 ft 2 in)
- Length of pressurized section - 25.110 m (82 ft 5 in)

2.2.9. Horizontal Tail

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

- Span - 9.84 m (9 ft 10.1 in)
- Area - 23.25 m² (250.26ft²)
- Aspect ratio - 4.16

2.2.10. Horizontal Tail

EFFECTIVITY: EMBRAER 175-E2 ACFT

- Span - 9.07 m (29 ft 9 in)
- Area - 19.77 m² (212.80 ft²)
- Aspect ratio - 4.17


2.2.11. Vertical Tail

- Span - 5.27 m (9 ft 10.1 in)
- Area - 16.20 m² (174.38 ft²)
- Aspect ratio - 1.71

EFFECTIVITY: EMBRAER 190-E2 ACFT

General Aircraft Dimensions

Figure 2.1

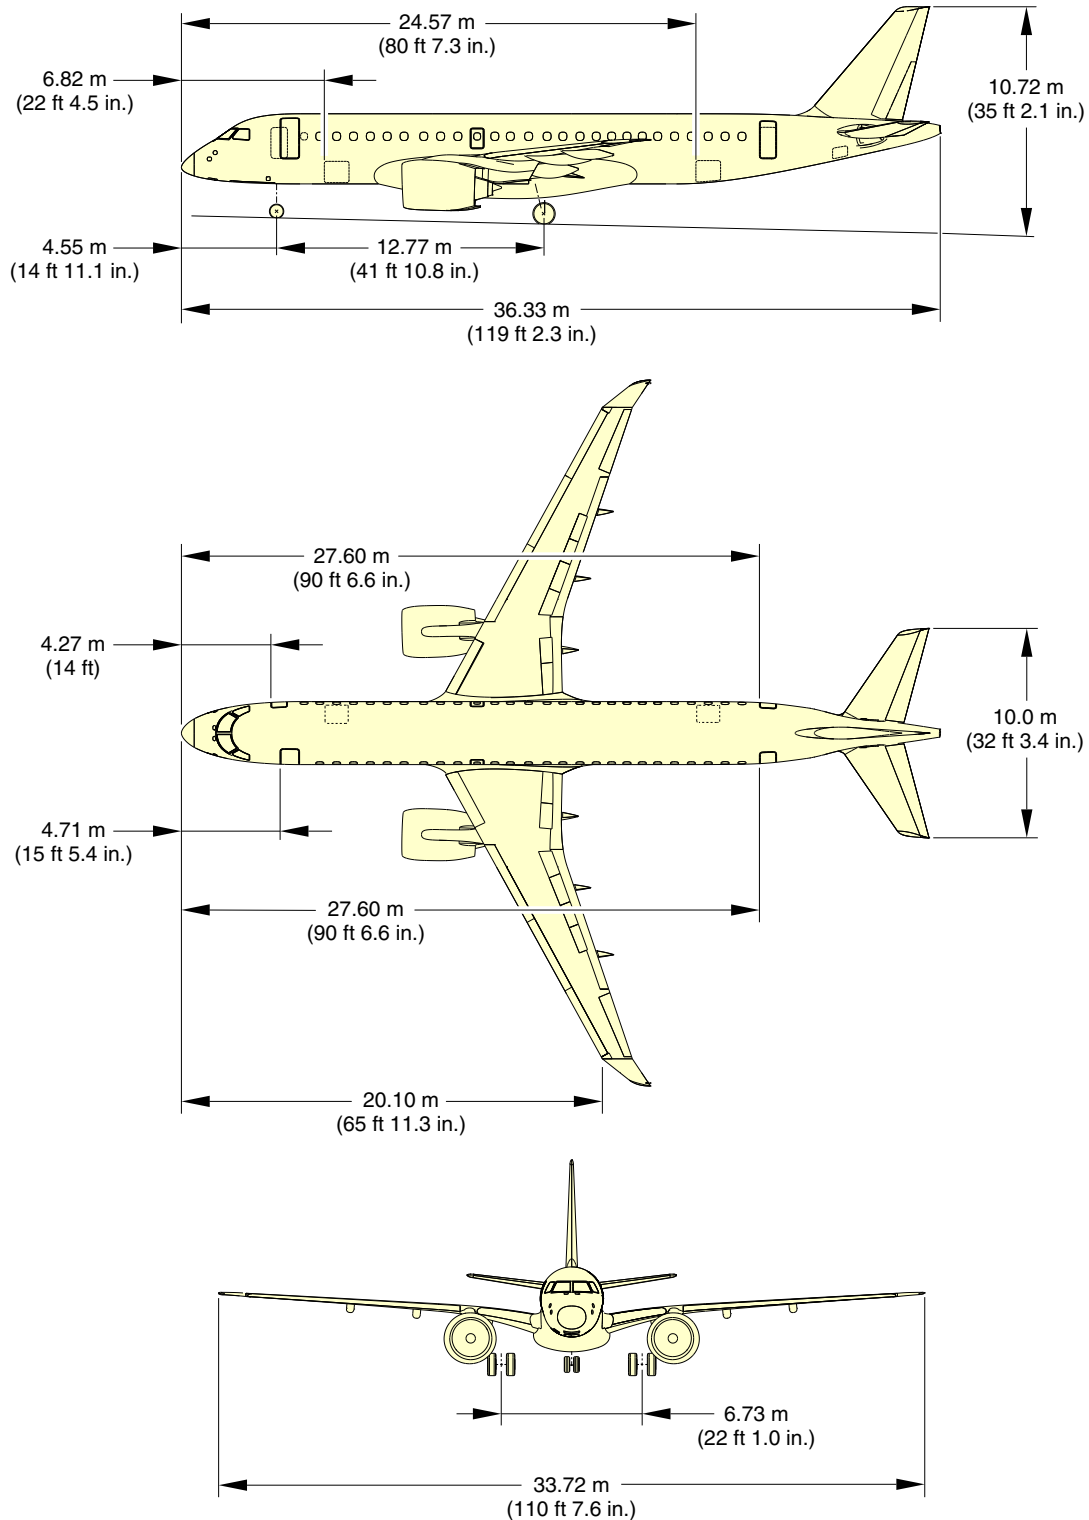


EM170E2APM020001B.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT

General Aircraft Dimensions

Figure 2.2

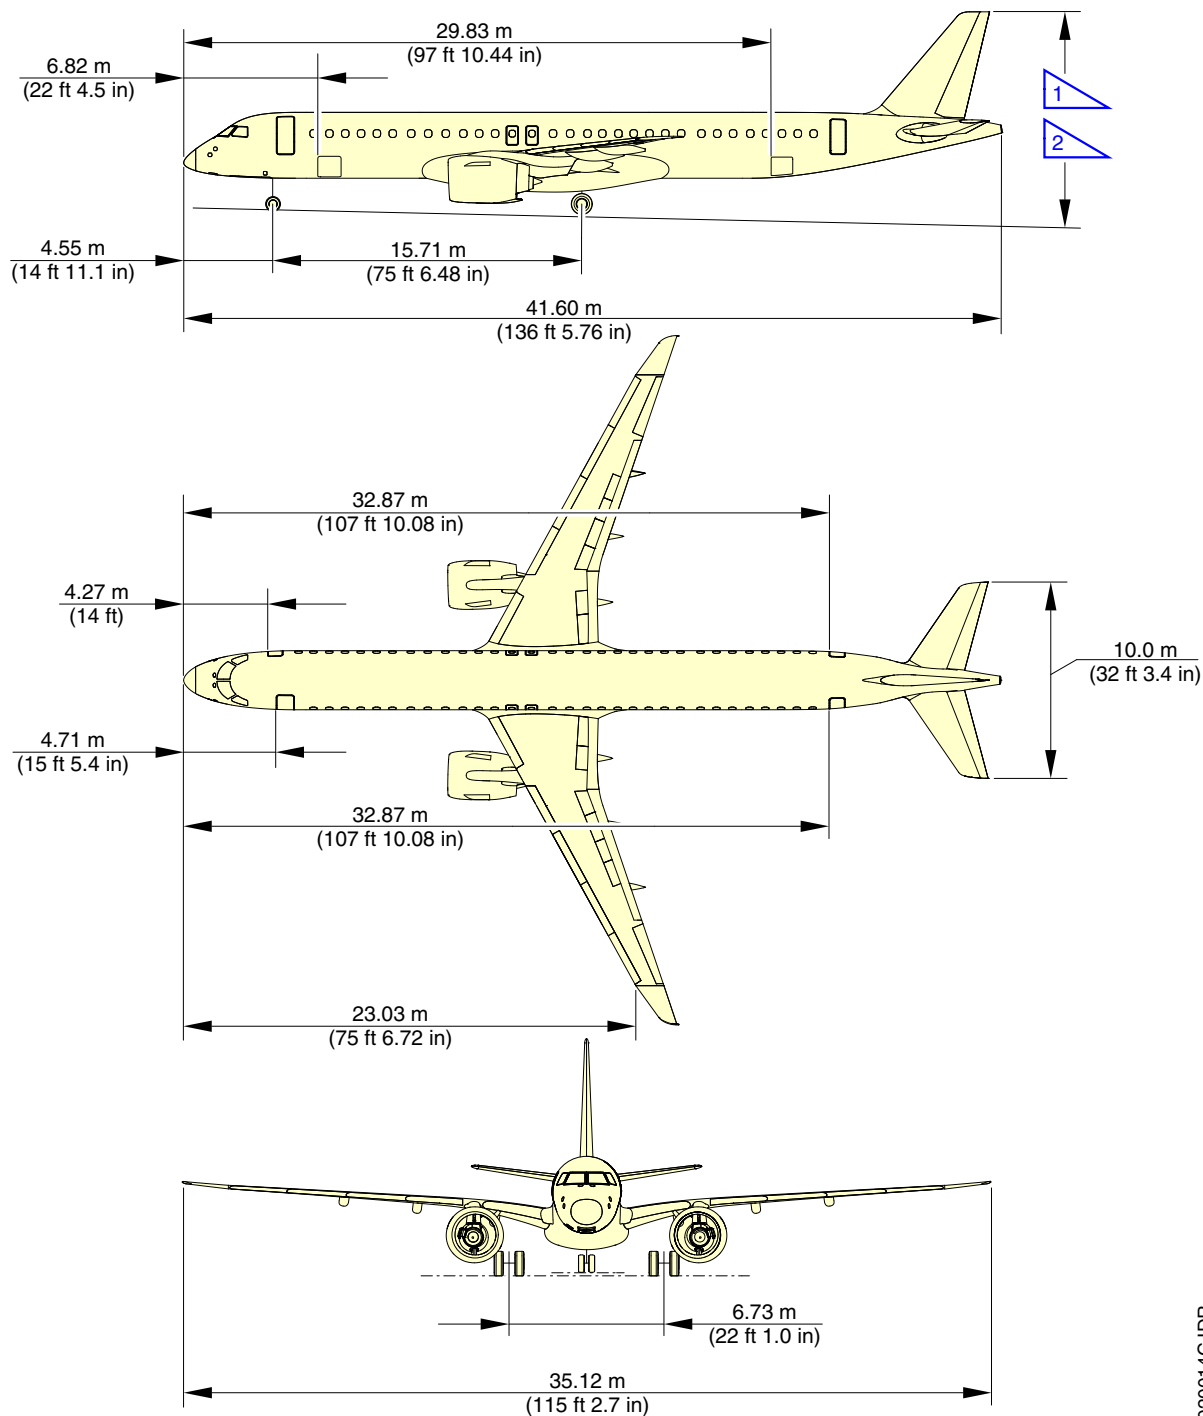

1 10.78 m (35 ft 4 in) MAXIMUM 54 °C (129.2 °F)


2 10.32 m (33 ft 10 in) MINIMUM -40 °C (-40 °F)

EM170E2APM020014C.IDR

EFFECTIVITY: EMBRAER 175-E2 ACFT

General Aircraft Dimensions

Figure 2.3


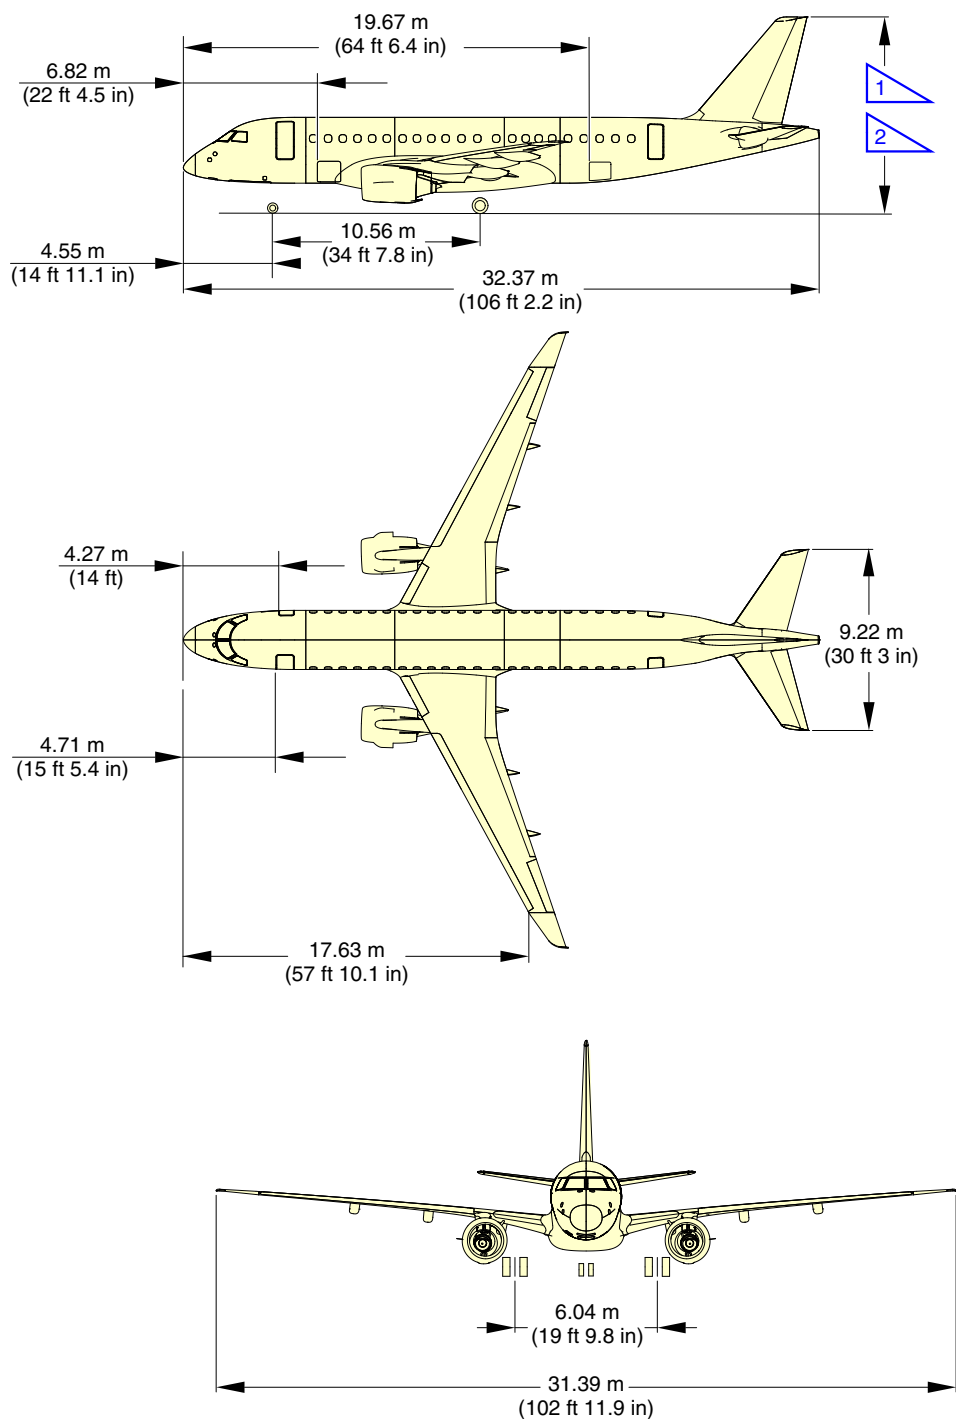


1 10.184 m (33 ft 5 in) MAXIMUM 54 °C (129.2 °F)

2 9.795 m (32 ft 2 in) MINIMUM -45 °C (-103 °F)

EM170E2APM020017A.IDR

EFFECTIVITY: ALL
 Passenger and Service Doors Dimensions
 Figure 2.4 - Sheet 1

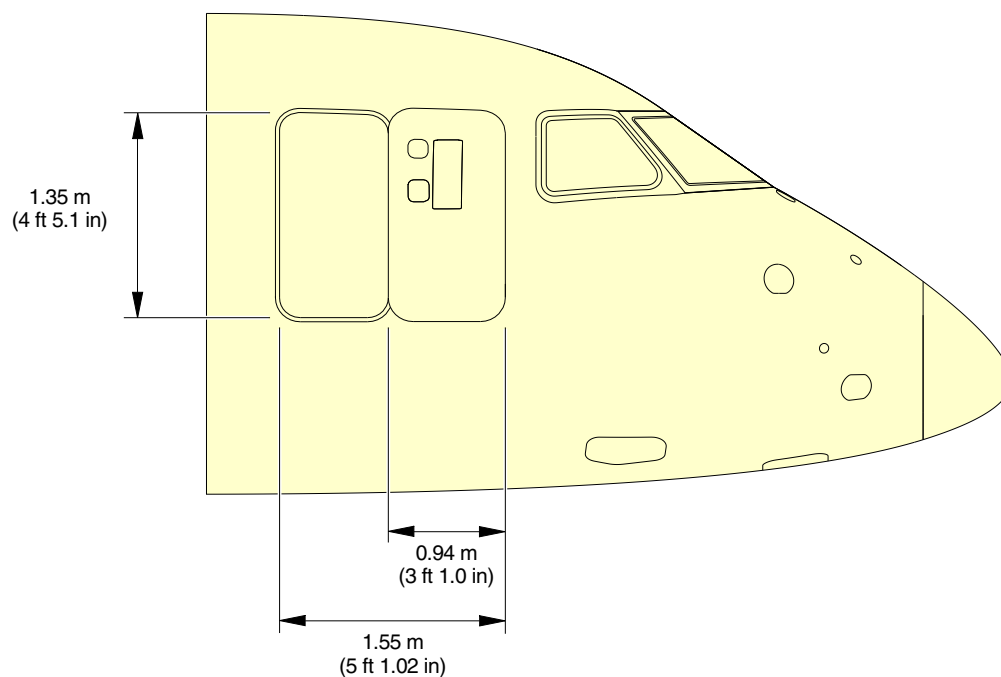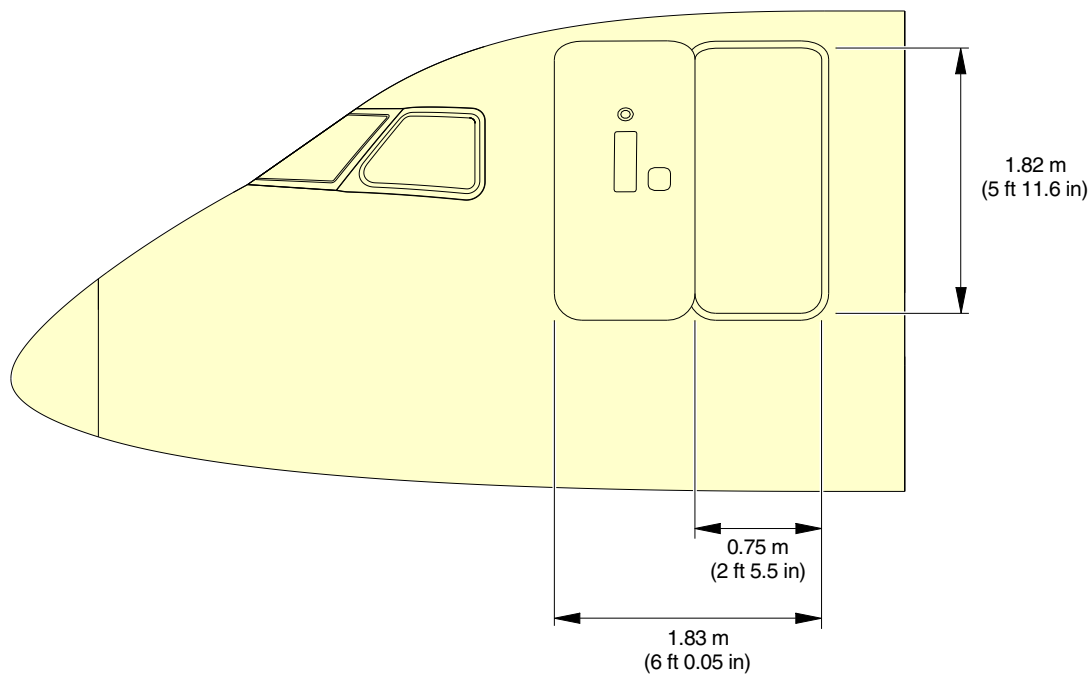


EM170E2APM020024A.IDR

EFFECTIVITY: ALL

Passenger and Service Doors Dimensions

Figure 2.4 - Sheet 2


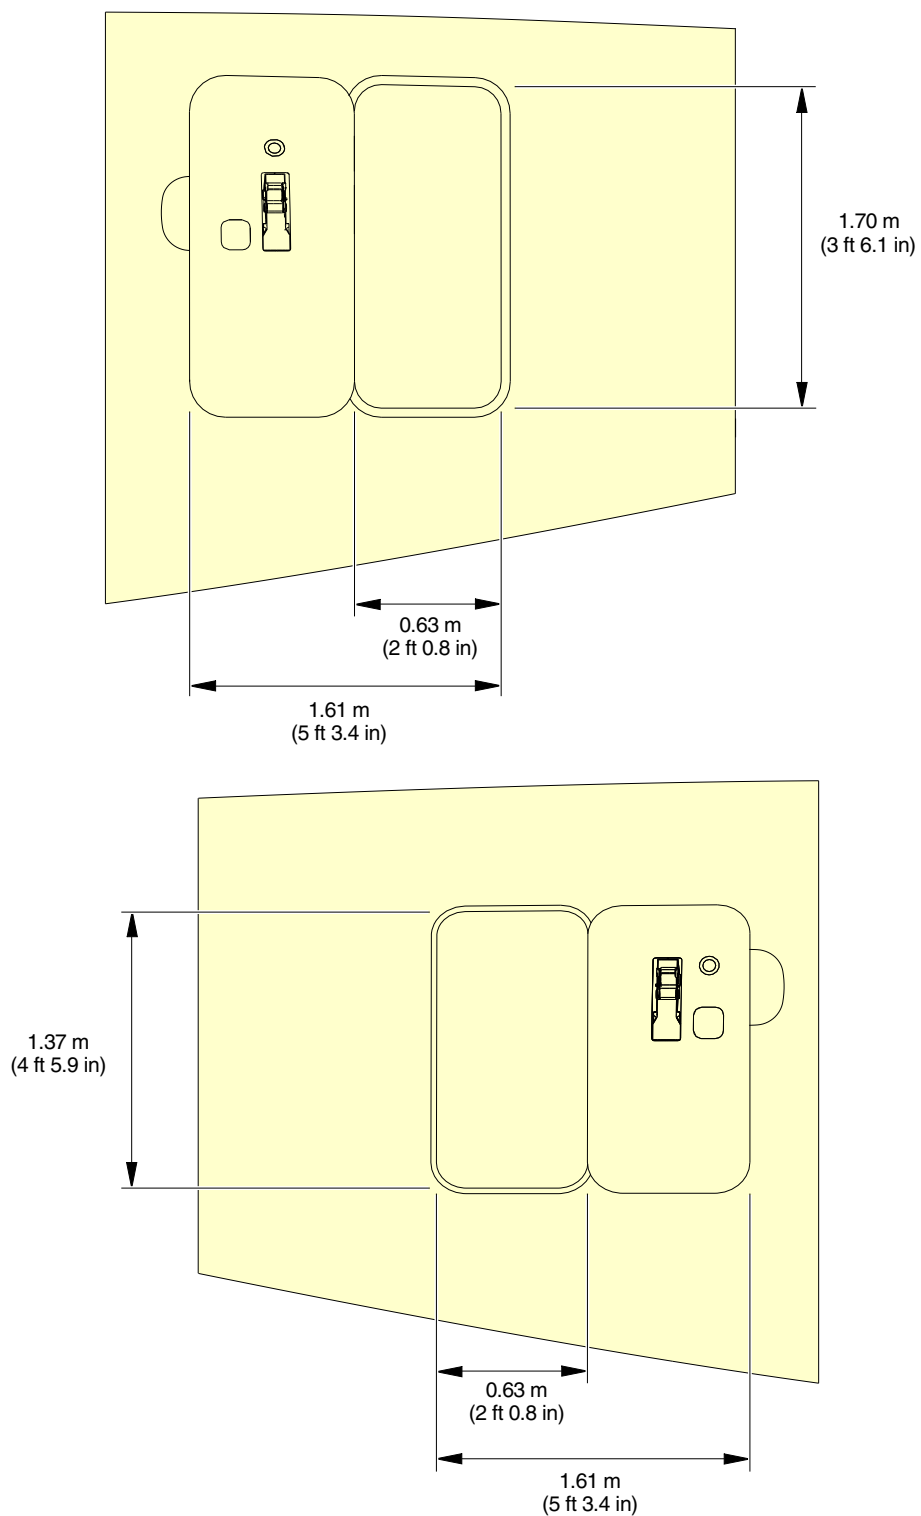


EM170E2APM020025A.IDR

EFFECTIVITY: ALL

Passenger and Service Doors Dimensions

Figure 2.4 - Sheet 3

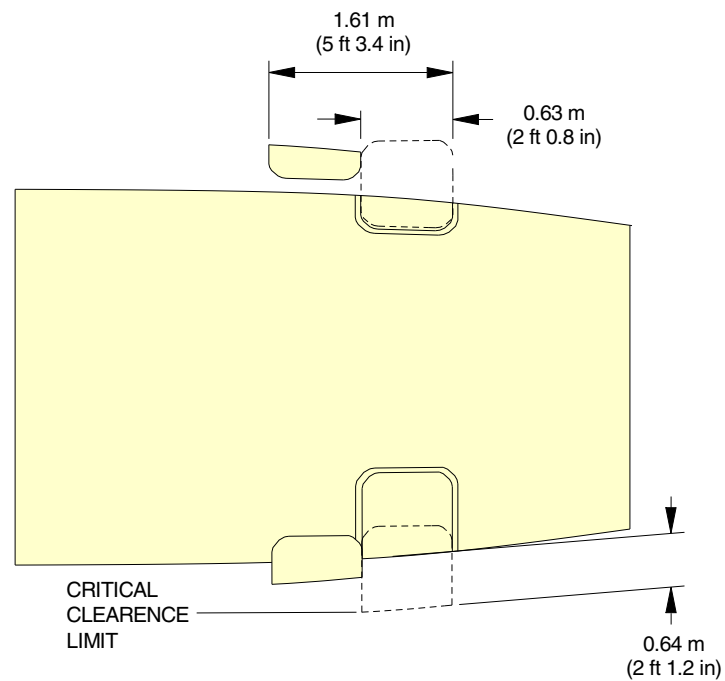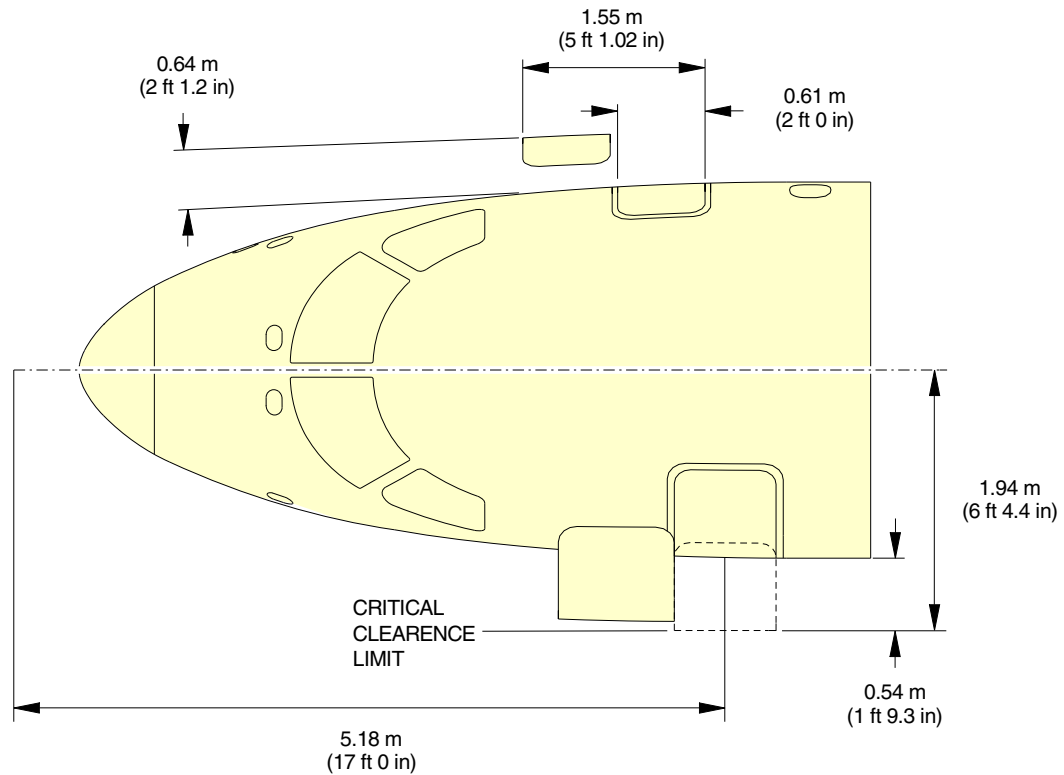


EM170E2APM020026A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT

Aircraft Ground Clearances

Figure 2.5

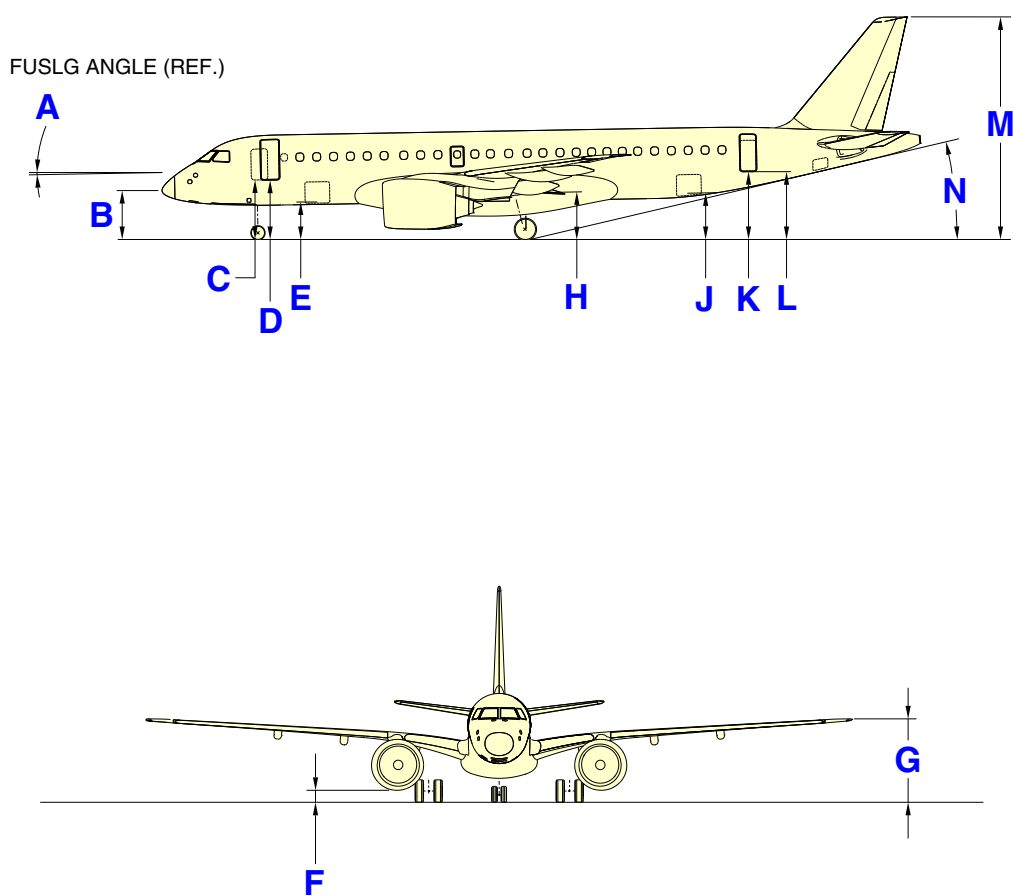

EM170E2APM020002B.IDR

Table 2.4 - Ground Clearance - STD Aircraft Model (@ -45 °C)
Effectivity: EMBRAER 190-E2 ACFT

WEIGHT	CG (%MAC)	FUS ANGLE (DEG) (A)	NOSE (B)	FORW ARD SERVI CE DOOR (C)	FORW ARD PASSE NGER DOOR (D)	FORW ARD CARG O DOOR (E)	NACEL LE (F)	WING TIP (G)	OVER WING ESCAPE (H)	AFT CARG O DOOR (J)	AFT SERVI CE DOOR (K)	AFT PASSE NGER DOOR (L)	VERTI CAL TAIL (M)	TAIL SKID ANGUL AR CLEAR ANCE (DEG) (N)
56600 kg 124784 lb	18	-0.73	2.26 m 7 ft 5 in	2.77 m 9 ft 1 in	2.77 m 9 ft 1 in	1.72 m 5 ft 7.7 in	0.38 m 1 ft 3 in	3.81 m 12 ft 6 in	2.16 m 7 ft 1 in	2.0 m 6 ft 6.7 in	3.07 m 10 ft 4.7 in	3.0 m 9 ft 10.1 in	10.4 m 34 ft 1.5 in	12.2
56600 kg 124784 lb	34	-0.54	2.30 m 7 ft 6.5 in	2.80 m 9 ft 2 in	2.80 m 9 ft 2 in	1.74 m 5 ft 8.5 in	0.39 m 1 ft 3.3 in	3.79 m 12 ft 4.8 in	2.14 m 7 ft 0.25 in	2.0 m 6 ft 6.7 in	3.02 m 9 ft 10.9 in	3.0 m 9 ft 10.1 in	10.3 m 33 ft 9.5 in	12.0
56400 kg 124343 lb	18	-0.73	2.26 m 7 ft 5 in	2.77 m 9 ft 1 in	2.77 m 9 ft 1 in	1.72 m 5 ft 7.7 in	0.38 m 1 ft 3 in	3.81 m 12 ft 6 in	2.16 m 7 ft 1 in	2.0 m 6 ft 6.7 in	3.07 m 10 ft 4.7 in	3.0 m 9 ft 10.1 in	10.4 m 34 ft 1.5 in	12.2
56400 kg 124343 lb	34	-0.54	2.30 m 7 ft 6.5 in	2.80 m 9 ft 2 in	2.80 m 9 ft 2 in	1.74 m 5 ft 8.5 in	0.39 m 1 ft 3.3 in	3.79 m 12 ft 5.2 in	2.14 m 7 ft 0.25 in	2.0 m 6 ft 6.7 in	3.02 m 9 ft 10.9 in	3.0 m 9 ft 10.1 in	10.3 m 33 ft 9.5 in	12.0
49050 kg 108139 lb	18	-0.8	2.26 m 7 ft 5 in	2.78 m 9 ft 1.5 in	2.78 m 9 ft 1.5 in	1.73 m 5 ft 8.1 in	0.40 m 1 ft 3.8 in	3.85 m 12 ft 7.2 in	2.18 m 7 ft 1.8 in	2.0 m 6 ft 6.7 in	3.11 m 10 ft 2.4 in	3.1 m 10 ft 2 in	10.4 m 34 ft 1.5 in	12.4
49050 kg 108139 lb	41	-0.49	2.34 m 7 ft 8.1 in	2.83 m 9 ft 3.8 in	2.84 m 9 ft 3.8 in	1.77 m 5 ft 9.7 in	0.42 m 1 ft 4.5 in	3.80 m 12 ft 5.6 in	2.16 m 7 ft 1 in	2.0 m 6 ft 6.7 in	3.03 m 9 ft 11.3 in	3.0 m 9 ft 10.1 in	10.3 m 33 ft 9.5 in	12.0
46700 kg 102958 lb	18	-0.83	2.26 m 7 ft 5 in	2.78 m 9 ft 3.4 in	2.79 m 9 ft 1.8 in	1.74 m 5 ft 8.5 in	0.41 m 1 ft 4.1 in	3.86 m 12 ft 8 in	2.19 m 7 ft 2.2 in	2.0 m 6 ft 6.7 in	3.12 m 10 ft 2.8 in	3.1 m 10 ft 2 in	10.5 m 34 ft 5.4 in	12.4
46700 kg 102958 lb	41	-0.51	2.34 m 7 ft 8.1 in	2.84 m 9 ft 3.8 in	2.84 m 9 ft 3.8 in	1.78 m 5 ft 10 in	0.42 m 1 ft 4.5 in	3.82 m 12 ft 6.4 in	2.18 m 7 ft 1.8 in	2.0 m 6 ft 6.7 in	3.05 m 10 ft 2.1 in	3.0 m 9 ft 10.1 in	10.3 m 33 ft 9.5 in	12.1
32700 kg 72093 lb	22	-0.99	2.29 m 7 ft 6.2 in	2.82 m 9 ft 3.4 in	2.83 m 9 ft 3.4 in	1.78 m 5 ft 10 in	0.47 m 1 ft 6.5 in	3.94 m 12 ft 11.1 in	2.68 m 8 ft 9.5 in	2.20 m 7 ft 2.6 in	3.22 m 10 ft 6.8 in	3.2 m 10 ft 6 in	10.6 m 34 ft 9.3 in	12.9
32700 kg 72093 lb	32	-0.85	2.32 m 7 ft 7.3 in	2.84 m 9 ft 3 in	2.85 m 9 ft 4.2 in	1.80 m 5 ft 10.8 in	0.47 m 1 ft 6.5 in	3.92 m 12 ft 10.3 in	2.60 m 8 ft 6.3 in	2.10 m 7 ft 10.7 in	3.19 m 10 ft 5.6 in	3.2 m 10 ft 6 in	10.5 m 34 ft 5.4 in	12.7



Table 2.5 - Ground Clearance - STD Aircraft Model (@ +20 °C)
Effectivity: EMBRAER 190-E2 ACFT

WEIGHT	CG (%MAC)	FUS ANGLE (DEG) (A)	NOSE (B)	FORW ARD SERVI CE DOOR (C)	FORW ARD PASSE NGER DOOR (D)	FORW ARD CARG O DOOR (E)	NACEL LE (F)	WING TIP (G)	OVER WING ESCAP E (H)	AFT CARG O DOOR (J)	AFT SERVI CE DOOR (K)	AFT PASSE NGER DOOR (L)	VERTIC AL TAIL (M)	TAIL SKID ANGUL AR CLEAR ANCE (DEG) (N)
56600 kg 124784 lb	18	-0.85	2.29 m 7 ft 6.2 in	2.81 m 9 ft 2.6 in	2.81 m 9 ft 2.6 in	1.76 m 5 ft 9.3 in	0.44 m 1 ft 5.3 in	3.89 m 12 ft 9.1 in	2.23 m 7 ft 3.8 in	2.10 m 6 ft 10.7 in	3.15 m 10 ft 4 in	3.16 m 10 ft 4.4 in	10.50 m 34 ft 5.4 in	12.6
56600 kg 124784 lb	34	-0.64	2.34 m 7 ft 8.1 in	2.84 m 9 ft 3 in	2.85 m 9 ft 4.2 in	1.79 m 5 ft 10.5 in	0.45 m 1 ft 5.7 in	3.86 m 12 ft 8 in	2.21 m 7 ft 3 in	2.07 m 6 ft 9.5 in	3.11 m 10 ft 2.4 in	3.11 m 10 ft 2.4 in	10.42 m 34 ft 2.2 in	12.3
56400 kg 124343 lb	18	-0.85	2.29 m 7 ft 6.2 in	2.81 m 9 ft 2.6 in	2.82 m 9 ft 3 in	1.76 m 5 ft 9.3 in	0.44 m 1 ft 5.3 in	3.89 m 12 ft 9.1 in	2.23 m 7 ft 3.8 in	2.10 m 6 ft 10.7 in	3.16 m 10 ft 4.4 in	3.16 m 10 ft 4.4 in	10.50 m 34 ft 5.4 in	12.6
56400 kg 124343 lb	34	-0.64	2.34 m 7 ft 8.1 in	2.84 m 9 ft 3 in	2.85 m 9 ft 4.2 in	1.79 m 5 ft 10.5 in	0.45 m 1 ft 5.7 in	3.86 m 12 ft 8 in	2.21 m 7 ft 3 in	2.07 m 6 ft 9.5 in	3.11 m 10 ft 2.4 in	3.11 m 10 ft 2.4 in	10.42 m 34 ft 2.2 in	12.3
49050 kg 108139 lb	18	-1.01	2.29 m 7 ft 6.2 in	2.82 m 9 ft 3.4 in	2.83 m 9 ft 3.4 in	1.78 m 5 ft 10 in	0.46 m 1 ft 6.1 in	3.93 m 12 ft 10.7 in	2.26 m 7 ft 5 in	2.15 m 7 ft 0.65 in	3.20 m 10 ft 6 in	3.20 m 10 ft 6 in	10.55 m 34 ft 7.4 in	12.8
49050 kg 108139 lb	41	-0.62	2.39 m 7 ft 10.1 in	2.88 m 9 ft 5.4 in	2.89 m 9 ft 5.8 in	1.83 m 6 ft 9.7 in	0.48 m 1 ft 6.9 in	3.88 m 12 ft 8.7 in	2.24 m 7 ft 4.2 in	2.08 m 6 ft 9.9 in	3.12 m 10 ft 2.8 in	3.12 m 10 ft 2.8 in	10.42 m 34 ft 2.2 in	12.4
46700 kg 102958 lb	18	-0.96	2.29 m 7 ft 6.2 in	2.82 m 9 ft 3.4 in	2.83 m 9 ft 3.4 in	1.79 m 5 ft 10.5 in	0.47 m 1 ft 6.5 in	3.94 m 12 ft 8.7 in	2.27 m 7 ft 5.4 in	2.02 m 6 ft 7.5 in	3.22 m 10 ft 6.8 in	3.22 m 10 ft 6.8 in	10.57 m 34 ft 8.1 in	12.8
46700 kg 102958 lb	41	-0.6	2.39 m 7 ft 10.1 in	2.89 m 9 ft 5.8 in	2.89 m 9 ft 5.8 in	1.83 m 6 ft 6 in	0.49 m 1 ft 7.3 in	3.89 m 12 ft 11.1 in	2.25 m 7 ft 4.6 in	2.10 m 6 ft 10.7 in	3.13 m 10 ft 3.2 in	3.13 m 10 ft 3.2 in	10.44 m 34 ft 3 in	12.4
32700 kg 72093 lb	22	-1.16	2.32 m 7 ft 7.3 in	2.86 m 9 ft 4.6 in	2.87 m 9 ft 5 in	1.84 m 6 ft 0.4 in	0.54 m 1 ft 9.3 in	4.04 m 13 ft 3.1 in	2.36 m 7 ft 8.9 in	2.27 m 7 ft 5.4 in	3.34 m 10 ft 11.5 in	3.34 m 10 ft 11.5 in	10.72 m 35 ft 2 in	13.3
32700 kg 72093 lb	32	-0.99	2.36 m 7 ft 8.9 in	2.89 m 9 ft 5.8 in	2.90 m 9 ft 6.2 in	1.86 m 6 ft 1.2 in	0.54 m 1 ft 9.3 in	4.02 m 13 ft 2.3 in	2.34 m 7 ft 8.1 in	2.24 m 7 ft 4.2 in	3.30 m 10 ft 9.9 in	3.30 m 10 ft 9.9 in	10.66 m 34 ft 11.7 in	13.1


Table 2.6 - Ground Clearance - STD Aircraft Model (@ +54 °C)
Effectivity: EMBRAER 190-E2 ACFT

WEIGHT	CG (%MAC)	FUS ANGLE (DEG) (A)	NOSE (B)	FORW ARD SERVI CE DOOR (C)	FORW ARD PASSE NGER DOOR (D)	FORW ARD CARG O DOOR (E)	NACEL LE (F)	WING TIP (G)	OVER WING ESCAP E (H)	AFT CARG O DOOR (J)	AFT SERVI CE DOOR (K)	AFT PASSE NGER DOOR (L)	VERTIC AL TAIL M)	TAIL SKID ANGUL AR CLEAR ANCE (DEG) (N)
56600 kg 124784 lb	18	-0.91	2.31 m 7 ft 6.9 in	2.83 m 9 ft 3.8 in	2.84 m 9 ft 3.8 in	1.79 m 5 ft 10.4 in	0.47 m 1 ft 6.5 in	3.93 m 12 ft 10.7 in	2.27 m 7 ft 5.4 in	2.15 m 7 ft 0.65 in	3.21 m 10 ft 6.4 in	3.21 m 10 ft 6.4 in	10.56 m 34 ft 7.7 in	12.8
56600 kg 124784 lb	34	-0.7	2.36 m 7 ft 8.9 in	2.87 m 9 ft 5 in	2.87 m 9 ft 5 in	1.82 m 5 ft 11.6 in	0.48 m 1 ft 6.9 in	3.90 m 12 ft 9.5 in	2.25 m 7 ft 4.6 in	2.11 m 6 ft 11 in	3.15 m 10 ft 4.0 in	3.16 m 10 ft 4.4 in	10.48 m 34 ft 4.6 in	12.5
56400 kg 124343 lb	18	-0.92	2.31 m 7 ft 6.9 in	2.83 m 9 ft 3.8 in	2.84 m 9 ft 3.8 in	1.79 m 5 ft 10.4 in	0.47 m 1 ft 6.5 in	3.94 m 12 ft 8.7 in	2.27 m 7 ft 5.4 in	2.15 m 7 ft 0.65 in	3.21 m 10 ft 6.4 in	3.21 m 10 ft 6.4 in	10.56 m 34 ft 7.7 in	12.8
56400 kg 124343 lb	34	-0.7	2.36 m 7 ft 8.9 in	2.87 m 9 ft 5 in	2.87 m 9 ft 5 in	1.82 m 5 ft 11.6 in	0.48 m 1 ft 6.9 in	3.90 m 12 ft 9.5 in	2.25 m 7 ft 4.6 in	2.11 m 6 ft 11 in	3.16 m 10 ft 4.4 in	3.16 m 10 ft 4.4 in	10.48 m 34 ft 4.6 in	12.5
49050 kg 108139 lb	18	-1.01	2.31 m 7 ft 6.9 in	2.84 m 9 ft 3.8 in	2.85 m 9 ft 4.2 in	1.81 m 5 ft 11.2 in	0.50 m 1 ft 7.7 in	3.97 m 13 ft 3 in	2.30 m 7 ft 6.6 in	2.20 m 6 ft 2.6 in	3.25 m 10 ft 8.0 in	3.26 m 10 ft 8.3 in	10.62 m 34 ft 10 in	13.0
49050 kg 108139 lb	41	-0.62	2.41 m 7 ft 10.9 in	2.91 m 9 ft 7 in	2.92 m 9 ft 7 in	1.86 m 6 ft 1.2 in	0.51 m 1 ft 8.1 in	3.92 m 12 ft 10.3 in	2.28 m 7 ft 5.7 in	2.13 m 6 ft 11.8 in	3.17 m 10 ft 4.8 in	3.17 m 10 ft 4.8 in	10.48 m 34 ft 4.6 in	12.5
46700 kg 102958 lb	18	-1.04	2.31 m 7 ft 6.9 in	2.85 m 9 ft 3.8 in	2.86 m 9 ft 4.6 in	1.81 m 5 ft 11.2 in	0.51 m 1 ft 8.1 in	3.99 m 13 ft 10.9 in	2.31 m 7 ft 6.9 in	2.21 m 7 ft 3 in	3.27 m 10 ft 8.7 in	3.27 m 10 ft 8.7 in	10.64 m 34 ft 11 in	13.1
46700 kg 102958 lb	41	-0.65	2.41 m 7 ft 10.9 in	2.92 m 9 ft 7 in	2.92 m 9 ft 7 in	1.86 m 6 ft 1.2 in	0.52 m 1 ft 8.5 in	3.94 m 12 ft 11.1 in	2.29 m 7 ft 6.1 in	2.14 m 7 ft 0.25 in	3.18 m 10 ft 5.2 in	3.18 m 10 ft 5.2 in	10.50 m 34 ft 5.4 in	12.6
32700 kg 72093 lb	22	-1.25	2.34 m 7 ft 8.1 in	2.89 m 9 ft 7.7 in	2.90 m 9 ft 7.7 in	1.87 m 6 ft 1.6 in	0.58 m 1 ft 10.8 in	4.10 m 13 ft 5.4 in	2.40 m 7 ft 10.5 in	2.33 m 7 ft 7.7 in	3.40 m 11 ft 1.8 in	3.40 m 11 ft 1.8 in	10.80 m 35 ft 6 in	13.6
32700 kg 72093 lb	32	-1.07	2.38 m 7 ft 9.7 in	2.92 m 9 ft 7 in	2.93 m 9 ft 7.3 in	1.89 m 6 ft 2.4 in	0.58 m 1 ft 10.8 in	4.07 m 13 ft 4.2 in	2.40 m 7 ft 10.5 in	2.30 m 7 ft 6.6 in	3.36 m 11 ft 2.8 in	3.36 m 11 ft 2.8 in	10.73 m 35 ft 2.4 in	13.4

EFFECTIVITY: EMBRAER 195-E2 ACFT

Aircraft Ground Clearances

Figure 2.6

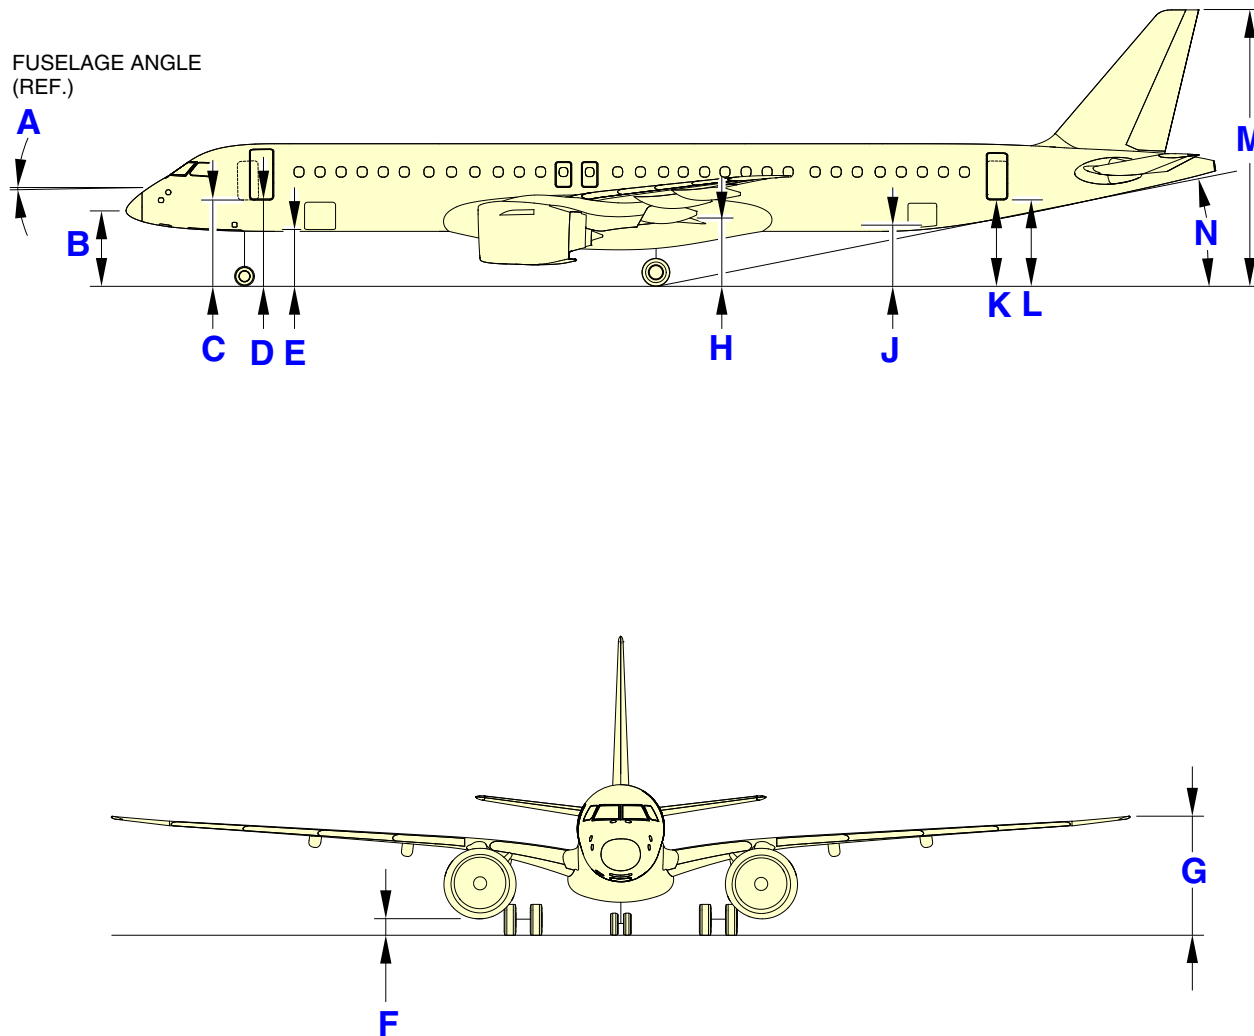

EM170E2APM020015A.IDR

Table 2.7 - Ground Clearance - STD Aircraft Model (@ -45 °C)
Effectivity: EMBRAER 195-E2 ACFT

WEIGHT	CG (%MAC)	FUS ANGLE (DEG) (A)	NOSE (B)	FORW ARD SERVI CE DOOR (C)	FORW ARD PASSE NGER DOOR (D)	FORW ARD CARG O DOOR (E)	NACEL LE (F)	WING TIP (G)	OVER WING ESCAPE (H)	AFT CARG O DOOR (J)	AFT SERVI CE DOOR (K)	AFT PASSE NGER DOOR (L)	VERTI CAL TAIL (M)	TAIL SKID ANGUL AR CLEAR ANCE (DEG) (N)
60100kg 132498 lb	13	-0.56	2.27 m 7 ft 5.4 in	2.77 m 9 ft 1 in	2.77 m 9 ft 1 in	1.71 m 5 ft 7.7 in	0.37 m 1 ft 3 in	3.90 m 12 ft 9.5 in	2.15 m 7 ft 1 in	2.0 m 6 ft 6.7 in	3.05 m 10 ft 0.1 in	3.0 m 9 ft 10.1 in	10.4 m 34 ft 1.5 in	10.5
61700 kg 136025 lb	34	-0.37	2.33 m 7 ft 7.7 in	2.81 m 9 ft 2.6 in	2.81 m 9 ft 2.6 in	1.74 m 5 ft 8.5 in	0.37 m 1 ft 3 in	3.90 m 12 ft 9.5 in	2.13 m 7 ft 0.25 in	1.97 m 6 ft 6.7 in	3.0 m 9 ft 10.1 in	3.0 m 9 ft 10.1 in	10.3 m 33 ft 9.5 in	10.2
61500 kg 135584 lb	34	-0.37	2.33 m 7 ft 7.7 in	2.81 m 9 ft 2.6 in	2.81 m 9 ft 2.6 in	1.74 m 5 ft 8.5 in	0.37 m 1 ft 3 in	3.90 m 12 ft 9.5 in	2.13 m 7 ft 1 in	1.97 m 6 ft 6.7 in	3.0 m 9 ft 10.1 in	3.0 m 9 ft 10.1 in	10.3 m 34 ft 1.5 in	10.2
59900 kg 132057 lb	13	-0.56	2.27 m 7 ft 5.4 in	2.77 m 9 ft 1 in	2.77 m 9 ft 1 in	1.71 m 5 ft 7.7 in	0.37 m 1 ft 3 in	3.90 m 12 ft 9.5 in	2.15 m 7 ft 0.25 in	2.0 m 6 ft 6.7 in	3.05 m 10 ft 0.1 in	3.0 m 9 ft 10.1 in	10.4 m 33 ft 9.5 in	10.5
54000 kg 119049 lb	13	-0.60	2.28 m 7 ft 5.8 in	2.78 m 9 ft 1.5 in	2.78 m 9 ft 1.5 in	1.72 m 5 ft 8.1 in	0.38 m 1 ft 3.8 in	3.90 m 12 ft 9.5 in	2.17 m 7 ft 1.8 in	2.0 m 6 ft 6.7 in	3.08 m 10 ft 1.2 in	3.1 m 10 ft 2 in	10.4 m 34 ft 1.5 in	10.6
54000 kg 119049 lb	40	-0.33	2.36 m 7 ft 8.9 in	2.84 m 9 ft 3.8 in	2.84 m 9 ft 3.8 in	1.77 m 5 ft 9.7 in	0.39 m 1 ft 4.5 in	3.90 m 12 ft 9.5 in	2.15 m 7 ft 1 in	2.0 m 6 ft 6.7 in	3.0 m 9 ft 10.1 in	3.0 m 9 ft 10.1 in	10.3 m 33 ft 9.5 in	10.3
51850 kg 114039 lb	13	-0.62	2.28 m 7 ft 5.8 in	2.78 m 9 ft 1.5 in	2.78 m 9 ft 1.5 in	1.73 m 5 ft 8.5 in	0.39 m 1 ft 4.1 in	3.90 m 12 ft 9.5 in	2.18 m 7 ft 2.2 in	2.0 m 6 ft 6.7 in	3.09 m 10 ft 1.7 in	3.1 m 10 ft 2 in	10.4 m 34 ft 5.4 in	10.6
51850 kg 114039 lb	40	-0.35	2.36 m 7 ft 8.9 in	2.84 m 9 ft 3.8 in	2.84 m 9 ft 3.8 in	1.78 m 5 ft 10 in	0.39 m 1 ft 4.5 in	3.90 m 12 ft 9.5 in	2.16 m 7 ft 1.8 in	2.0 m 6 ft 6.7 in	3.0 m 9 ft 10.1 in	3.0 m 9 ft 10.1 in	10.3 m 33 ft 9.5 in	10.3
34700kg 76500 lb	18	-0.75	2.31 m 7 ft 7 in	2.83 m 9 ft 3.4 in	2.83 m 9 ft 3 in	1.77 m 5 ft 10 in	0.45 m 1 ft 6.5 in	4.0 m 13 ft 1.4 in	2.26 m 8 ft 9.5 in	2.1 m 7 ft 2.6 in	3.2 m 10 ft 6 in	3.2 m 10 ft 6 in	10.5 m 34 ft 9.3 in	110
34700 kg 76500 lb	30	-0.62	2.35 m 7 ft 8.5 in	2.85 m 9 ft 4.2 in	2.85 m 9 ft 4.2 in	1.80 m 5 ft 10.8 in	0.46 m 1 ft 6.5 in	4.0 m 13 ft 1.4 in	2.25 m 8 ft 6.3 in	2.1 m 7 ft 10.7 in	3.16 m 10 ft 4.4 in	3.2 m 10 ft 6 in	10.5 m 34 ft 5.4 in	10.8

Table 2.8 - Ground Clearance - STD Aircraft Model (@ +20 °C)
Effectivity: EMBRAER 195-E2 ACFT

WEIGHT	CG (%MAC)	FUS ANGLE (DEG) (A)	NOSE (B)	FORW ARD SERVI CE DOOR (C)	FORW ARD PASSE NGER DOOR (D)	FORW ARD CARG O DOOR (E)	NACEL LE (F)	WING TIP (G)	OVER WING ESCAP E (H)	AFT CARG O DOOR (J)	AFT SERVI CE DOOR (K)	AFT PASSE NGER DOOR (L)	VERTIC AL TAIL (M)	TAIL SKID ANGUL AR CLEAR ANCE (DEG) (N)
60100kg 132498 lb	13	-0.65	2.31 m 7 ft 7 in	2.81 m 9 ft 2.6 in	2.81 m 9 ft 2.6 in	1.76 m 5 ft 9.3 in	0.44 m 1 ft 5.3 in	4.0 m 12 ft 9.6 in	2.23 m 7 ft 3.8 in	2.10 m 6 ft 10.7 in	3.14 m 10 ft 3.6 in	3.16 m 10 ft 4.4 in	10.50 m 34 ft 5.4 in	10.7
61700 kg 136025 lb	34	-0.43	2.37 m 7 ft 9.4 in	2.85 m 9 ft 4.2 in	2.85 m 9 ft 4.2 in	1.79 m 5 ft 10.5 in	0.45 m 1 ft 5.7 in	3.9 m 12 ft 9.6 in	2.21 m 7 ft 3 in	2.07 m 6 ft 9.5 in	3.07 m 10 ft 0.8 in	3.11 m 10 ft 2.4 in	10.42 m 34 ft 2.2 in	10.5
61500 kg 135584 lb	34	-0.43	2.37 m 7 ft 9.4 in	2.85 m 9 ft 4.2 in	2.85 m 9 ft 4.2 in	1.76 m 5 ft 9.3 in	0.44 m 1 ft 5.3 in	3.9 m 12 ft 9.6 in	2.23 m 7 ft 3.8 in	2.10 m 6 ft 10.7 in	3.07 m 10 ft 0.8 in	3.16 m 10 ft 4.4 in	10.50 m 34 ft 5.4 in	10.5
59900 kg 132057 lb	13	-0.43	2.31 m 7 ft 7 in	2.81 m 9 ft 4.2 in	2.85 m 9 ft 4.2 in	1.79 m 5 ft 10.5 in	0.45 m 1 ft 5.7 in	3.9 m 12 ft 9.6 in	2.21 m 7 ft 3 in	2.07 m 6 ft 9.5 in	3.14 m 10 ft 3.6 in	3.11 m 10 ft 2.4 in	10.42 m 34 ft 2.2 in	10.8
54000 kg 119049 lb	13	-0.65	2.31 m 7 ft 7 in	2.82 m 9 ft 3.4 in	2.83 m 9 ft 3.4 in	1.78 m 5 ft 10 in	0.46 m 1 ft 6.1 in	3.9 m 12 ft 9.6 in	2.26 m 7 ft 5 in	2.15 m 7 ft 0.65 in	3.17 m 10 ft 4.8 in	3.20 m 10 ft 6 in	10.55 m 34 ft 7.4 in	10.9
54000 kg 119049 lb	40	-0.70	2.41 m 7 ft 10.9 in	2.9 m 9 ft 5.8 in	2.9 m 9 ft 5.8 in	1.83 m 6 ft 9.7 in	0.48 m 1 ft 6.9 in	3.9 m 12 ft 9.6 in	2.24 m 7 ft 4.2 in	2.08 m 6 ft 9.9 in	3.08 m 10 ft 1.2 in	3.12 m 10 ft 2.8 in	10.42 m 34 ft 2.2 in	10.5
51850 kg 114039 lb	13	-0.38	2.31 m 7 ft 7 in	2.82 m 9 ft 5.8 in	2.83 m 9 ft 3.4 in	1.79 m 5 ft 10.5 in	0.47 m 1 ft 6.5 in	3.9 m 12 ft 9.6 in	2.27 m 7 ft 5.4 in	2.02 m 6 ft 7.5 in	3.18 m 10 ft 5.2 in	3.22 m 10 ft 6.8 in	10.57 m 34 ft 8.1 in	10.9
51850 kg 114039 lb	40	-0.71	2.41 m 7 ft 10.9 in	2.90 m 9 ft 5.8 in	2.89 m 9 ft 5.8 in	1.83 m 6 ft 6 in	0.49 m 1 ft 7.3 in	4.0 m 12 ft 9.6 in	2.25 m 7 ft 4.6 in	2.10 m 6 ft 10.7 in	3.09 m 10 ft 1.7 in	3.13 m 10 ft 3.2 in	10.44 m 34 ft 3 in	10.5
34700kg 76500 lb	18	-0.87	2.35 m 7 ft 8.5 in	2.87 m 9 ft 5 in	2.87 m 9 ft 5 in	1.84 m 6 ft 0.4 in	0.54 m 1 ft 9.3 in	4.0 m 13 ft 5.4 in	2.36 m 7 ft 8.9 in	2.27 m 7 ft 5.4 in	3.30 m 10 ft 10 in	3.34 m 10 ft 11.5 in	10.72 m 35 ft 2 in	11.3
34700 kg 76500 lb	30	-0.71	2.39 m 7 ft 10.1 in	2.90 m 9 ft 6.2 in	2.90 m 9 ft 6.2 in	1.86 m 6 ft 1.2 in	0.54 m 1 ft 9.3 in	4.0 m 13 ft 5.4 in	2.34 m 7 ft 8.1 in	2.24 m 7 ft 4.2 in	3.26 m 10 ft 8.4 in	3.30 m 10 ft 9.9 in	10.66 m 34 ft 11.7 in	11.2


Table 2.9 - Ground Clearance - STD Aircraft Model (@ +54 °C)
Effectivity: EMBRAER 195-E2 ACFT

WEIGHT	CG (%MAC)	FUS ANGLE (DEG) (A)	NOSE (B)	FORW ARD SERVI CE DOOR (C)	FORW ARD PASSE NGER DOOR (D)	FORW ARD CARG O DOOR (E)	NACEL LE (F)	WING TIP (G)	OVER WING ESCAP E (H)	AFT CARG O DOOR (J)	AFT SERVI CE DOOR (K)	AFT PASSE NGER DOOR (L)	VERTIC AL TAIL (M)	TAIL SKID ANGUL AR CLEAR ANCE (DEG) (N)
60100kg 132498 lb	13	-0.70	2.33 m 7 ft 7.7 in	2.84 m 9 ft 3.8 in	2.84 m 9 ft 3.8 in	1.79 m 5 ft 10.4 in	0.47 m 1 ft 6.5 in	4.0 m 13 ft 5.4 in	2.27 m 7 ft 5.4 in	2.15 m 7 ft 0.65 in	3.18 m 10 ft 5.2 in	3.21 m 10 ft 6.4 in	10.56 m 34 ft 7.7 in	10.9
61700 kg 136025 lb	34	-0.47	2.39 m 7 ft 10.1 in	2.88 m 9 ft 5.4 in	2.87 m 9 ft 5 in	1.82 m 5 ft 11.6 in	0.48 m 1 ft 6.9 in	4.0 m 13 ft 5.4 in	2.25 m 7 ft 4.6 in	2.11 m 6 ft 11 in	3.12 m 10 ft 2.9 in	3.16 m 10 ft 4.4 in	10.48 m 34 ft 4.6 in	10.6
61500 kg 135584 lb	34	-0.47	2.39 m 7 ft 10.1 in	2.88 m 9 ft 5.4 in	2.84 m 9 ft 3.8 in	1.79 m 5 ft 10.4 in	0.47 m 1 ft 6.5 in	4.0 m 13 ft 5.4 in	2.27 m 7 ft 5.4 in	2.15 m 7 ft 0.65 in	3.12 m 10 ft 2.9 in	3.21 m 10 ft 6.4 in	10.56 m 34 ft 7.7 in	10.6
59900 kg 132057 lb	13	-0.70	2.33 m 7 ft 7.7 in	2.84 m 9 ft 3.8 in	2.87 m 9 ft 5 in	1.82 m 5 ft 11.6 in	0.48 m 1 ft 6.9 in	4.0 m 13 ft 5.4 in	2.25 m 7 ft 4.6 in	2.11 m 6 ft 11 in	3.19 m 10 ft 5.6 in	3.16 m 10 ft 4.4 in	10.48 m 34 ft 4.6 in	10.9
54000 kg 119049 lb	13	-0.75	2.33 m 7 ft 7.7 in	2.84 m 9 ft 3.8 in	2.85 m 9 ft 4.2 in	1.81 m 5 ft 11.2 in	0.50 m 1 ft 7.7 in	4.0 m 13 ft 5.4 in	2.30 m 7 ft 6.6 in	2.20 m 6 ft 2.6 in	3.22 m 10 ft 6.7 in	3.26 m 10 ft 8.3 in	10.62 m 34 ft 10 in	11.0
54000 kg 119049 lb	40	-0.42	2.44 m 8 ft 1.2 in	2.92 m 9 ft 7 in	2.92 m 9 ft 7 in	1.86 m 6 ft 1.2 in	0.51 m 1 ft 8.1 in	4.0 m 13 ft 5.4 in	2.28 m 7 ft 5.7 in	2.13 m 6 ft 11.8 in	3.13 m 10 ft 3.2 in	3.17 m 10 ft 4.8 in	10.48 m 34 ft 4.6 in	10.7
51850 kg 114039 lb	13	-0.77	2.33 m 7 ft 7.7 in	2.85 m 9 ft 4.2 in	2.86 m 9 ft 4.6 in	1.81 m 5 ft 11.2 in	0.51 m 1 ft 8.1 in	4.0 m 13 ft 5.4 in	2.31 m 7 ft 6.9 in	2.21 m 7 ft 3 in	3.23 m 10 ft 7.2 in	3.27 m 10 ft 8.7 in	10.64 m 34 ft 11 in	11.1
51850 kg 114039 lb	40	-0.43	2.44 m 8 ft 1.2 in	2.93 m 9 ft 7.3 in	2.92 m 9 ft 7 in	1.86 m 6 ft 1.2 in	0.52 m 1 ft 8.5 in	4.0 m 13 ft 5.4 in	2.29 m 7 ft 6.1 in	2.14 m 7 ft 0.25 in	3.14 m 10 ft 3.6 in	3.18 m 10 ft 5.2 in	10.50 m 34 ft 5.4 in	10.7
34700kg 76500 lb	18	-0.93	2.37 m 7 ft 9.4 in	2.90 m 9 ft 6.1 in	2.90 m 9 ft 7.7 in	1.87 m 6 ft 1.6 in	0.58 m 1 ft 10.8 in	4.1 m 13 ft 5.4 in	2.40 m 7 ft 10.5 in	2.33 m 7 ft 7.7 in	3.36 m 10 ft 0.2 in	3.40 m 11 ft 1.8 in	10.80 m 35 ft 6 in	11.5
34700 kg 76500 lb	30	-0.77	2.42 m 7 ft 11.3 in	2.93 m 9 ft 7.3 in	2.93 m 9 ft 7.3 in	1.89 m 6 ft 2.4 in	0.58 m 1 ft 10.8 in	4.1 m 13 ft 5.4 in	2.40 m 7 ft 10.5 in	2.30 m 7 ft 6.6 in	3.32 m 10 ft 10.7 in	3.36 m 11 ft 2.8 in	10.73 m 35 ft 2.4 in	11.4

EFFECTIVITY: EMBRAER 175-E2 ACFT

Aircraft Ground Clearances

Figure 2.7

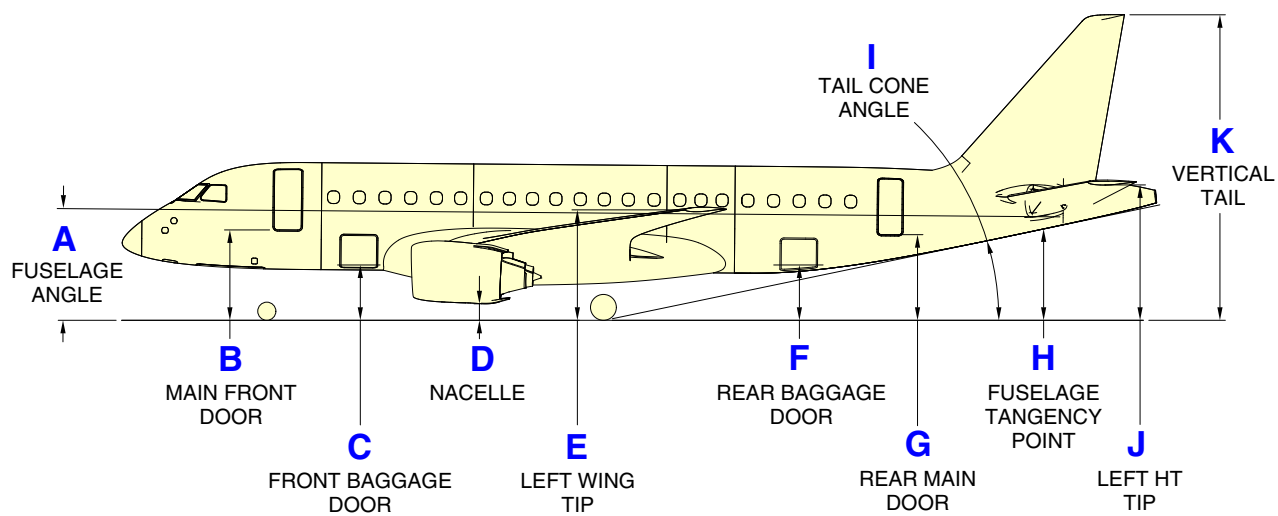

EM170E2APM020023A.IDR

Table 2.10 - Ground Clearance - STD Aircraft Model (@ -45 °C)
Effectivity: EMBRAER 175-E2 ACFT

WEIGHT (Kg)	CG (%MAC)	FUSELAGE ANGLE (DEG) (A)	MAIN FRONT DOOR (m) (B)	FRONT BAG DOOR (m) (C)	NACELLE (m) (D)	LEFT WING TIP (m) (E)	REAR BAG DOOR (m) (F)	REAR MAIN DOOR (m) (G)	LEFT HT TIP (m) (J)	VERTICAL TAIL (m) (K)	FUSELAGE TAN POINT (m) (H)	TAIL ANGLE (deg) (I)
45700	25	0,15	2,729	1,644	0,462	3,536	1,680	2,688	4,206	9,889	3,376	12,00
45700	25	0,15	2,729	1,644	0,462	3,536	1,680	2,688	4,206	9,889	3,376	12,00
45700	31	0,24	2,741	1,654	0,465	3,527	1,668	2,671	4,178	9,860	3,348	11,90
45700	31	0,24	2,741	1,654	0,465	3,527	1,668	2,671	4,178	9,860	3,348	11,90
45700	25	0,15	2,730	1,644	0,458	3,550	1,680	2,687	4,210	9,889	3,376	12,00
45700	25	0,15	2,728	1,645	0,466	3,522	1,681	2,689	4,202	9,889	3,376	12,00
45700	25	0,15	2,730	1,644	0,457	3,554	1,680	2,686	4,211	9,889	3,376	12,00
45700	25	0,15	2,727	1,645	0,467	3,520	1,681	2,689	4,201	9,889	3,376	12,00
45700	31	0,24	2,743	1,654	0,461	3,542	1,667	2,670	4,182	9,860	3,348	11,90
45700	31	0,24	2,740	1,654	0,469	3,514	1,668	2,672	4,174	9,860	3,348	11,90
45700	31	0,24	2,743	1,654	0,460	3,545	1,667	2,669	4,183	9,860	3,348	11,90
45700	31	0,24	2,740	1,654	0,469	3,512	1,668	2,672	4,173	9,860	3,348	11,90
45500	25	0,14	2,729	1,645	0,463	3,537	1,681	2,689	4,207	9,890	3,377	12,01
45500	25	0,14	2,729	1,645	0,463	3,537	1,681	2,689	4,207	9,890	3,377	12,01
45500	31	0,23	2,742	1,654	0,466	3,528	1,668	2,672	4,179	9,861	3,349	11,91
45500	31	0,23	2,742	1,654	0,466	3,528	1,668	2,672	4,179	9,861	3,349	11,91
45500	25	0,14	2,731	1,644	0,459	3,551	1,681	2,688	4,211	9,890	3,377	12,01
45500	25	0,14	2,728	1,645	0,467	3,523	1,682	2,690	4,203	9,890	3,377	12,01
45500	25	0,14	2,731	1,644	0,458	3,555	1,680	2,687	4,212	9,891	3,377	12,01
45500	25	0,14	2,728	1,645	0,467	3,521	1,682	2,690	4,202	9,891	3,377	12,01
45500	31	0,23	2,743	1,654	0,461	3,543	1,668	2,670	4,183	9,861	3,349	11,91
45500	31	0,23	2,740	1,655	0,469	3,515	1,669	2,673	4,175	9,861	3,349	11,91
45500	31	0,23	2,743	1,654	0,461	3,546	1,668	2,670	4,184	9,861	3,349	11,91
45500	31	0,23	2,740	1,655	0,470	3,512	1,669	2,673	4,175	9,861	3,349	11,91
44170	20	0,07	2,723	1,641	0,465	3,548	1,696	2,708	4,235	9,920	3,406	12,11
44170	20	0,07	2,723	1,641	0,465	3,548	1,696	2,708	4,235	9,920	3,406	12,11
44170	20	0,07	2,724	1,640	0,460	3,564	1,696	2,707	4,240	9,920	3,406	12,11
44170	20	0,07	2,721	1,641	0,469	3,535	1,697	2,709	4,232	9,920	3,406	12,11
44170	20	0,07	2,724	1,640	0,459	3,567	1,696	2,707	4,241	9,920	3,406	12,11
44170	20	0,07	2,721	1,641	0,469	3,532	1,697	2,710	4,231	9,920	3,406	12,11
40500	20	0,03	2,730	1,649	0,475	3,563	1,713	2,726	4,258	9,943	3,428	12,19
40500	20	0,03	2,730	1,649	0,475	3,563	1,713	2,726	4,258	9,943	3,428	12,19
40500	37.1	0,31	2,768	1,679	0,484	3,538	1,675	2,675	4,173	9,854	3,343	11,88



Table 2.10 - Ground Clearance - STD Aircraft Model (@ -45 °C) (Continued)

Effectivity: EMBRAER 175-E2 ACFT

40500	37.1	0,31	2,768	1,679	0,484	3,538	1,675	2,675	4,173	9,854	3,344	11,88
40500	20	0,03	2,731	1,648	0,471	3,579	1,712	2,725	4,262	9,943	3,429	12,19
40500	20	0,03	2,728	1,649	0,480	3,548	1,713	2,728	4,253	9,943	3,429	12,19
40500	20	0,03	2,731	1,648	0,470	3,583	1,712	2,725	4,263	9,943	3,429	12,19
40500	20	0,03	2,728	1,649	0,481	3,544	1,714	2,728	4,252	9,943	3,429	12,19
40500	37.1	0,31	2,770	1,678	0,480	3,554	1,674	2,673	4,178	9,854	3,344	11,88
40500	37.1	0,31	2,767	1,679	0,488	3,524	1,675	2,676	4,169	9,854	3,344	11,88
40500	37.1	0,31	2,770	1,678	0,480	3,554	1,674	2,673	4,178	9,855	3,344	11,88
40500	37.1	0,31	2,767	1,679	0,488	3,524	1,675	2,676	4,169	9,855	3,344	11,88
38150	40	0,36	2,785	1,694	0,495	3,542	1,677	2,674	4,166	9,846	3,336	11,86
38150	40	0,36	2,785	1,694	0,495	3,542	1,677	2,674	4,166	9,847	3,336	11,86
38150	40	0,36	2,786	1,693	0,492	3,554	1,676	2,673	4,169	9,846	3,336	11,86
38150	40	0,36	2,784	1,694	0,498	3,533	1,677	2,674	4,164	9,846	3,336	11,86
38150	40	0,36	2,786	1,693	0,490	3,559	1,676	2,673	4,171	9,847	3,337	11,86
38150	40	0,36	2,783	1,694	0,500	3,527	1,677	2,675	4,162	9,847	3,337	11,86
38150	20	0,01	2,734	1,653	0,481	3,572	1,723	2,737	4,271	9,956	3,442	12,23
38150	39.6	0,35	2,782	1,691	0,494	3,541	1,676	2,674	4,167	9,848	3,337	11,86
29200	20	-0,10	2,756	1,679	0,516	3,621	1,777	2,797	4,345	10,03 3	3,516	12,49
32200	40	0,31	2,802	1,713	0,518	3,570	1,707	2,706	4,204	9,885	3,374	11,99
26200	23.5	-0,10	2,772	1,696	0,532	3,637	1,792	2,812	4,359	10,04 7	3,531	12,54
26200	30	0,01	2,788	1,708	0,536	3,626	1,777	2,791	4,325	10,01 0	3,495	12,41

Table 2.11 - Ground Clearance - STD Aircraft Model (@ +20 °C)

Effectivity: EMBRAER 175-E2 ACFT

WEIG HT (Kg)	CG (%MA C)	FUS ANGL E (DEG) (A)	MAIN FRON T DOOR (m) (B)	FRON T BAG DOOR (m) (C)	NACE LLE (m) (D)	LEFT WING TIP (m) (E)	REAR BAG DOOR (m) (F)	REAR MAIN DOOR (m) (G)	LEFT HT TIP (m) (J)	VERTI CAL TAIL (m) (K)	FUS TAN POIN T (m) (H)	TAIL ANGL E (dg) (I)
45700	25	0,05	2,772	1,691	0,516	3,602	1,750	2,763	4,292	9,978	3,463	12,30
45700	25	0,05	2,772	1,691	0,516	3,602	1,750	2,763	4,292	9,978	3,463	12,30
45700	31	0,15	2,786	1,701	0,519	3,592	1,736	2,744	4,261	9,945	3,432	12,19
45700	31	0,15	2,786	1,701	0,519	3,592	1,736	2,744	4,261	9,945	3,432	12,19
45700	25	0,05	2,773	1,690	0,511	3,618	1,750	2,762	4,297	9,978	3,463	12,30
45700	25	0,05	2,771	1,691	0,520	3,587	1,751	2,764	4,288	9,978	3,463	12,30
45700	25	0,05	2,774	1,690	0,510	3,622	1,750	2,762	4,298	9,978	3,463	12,30
45700	25	0,05	2,770	1,691	0,521	3,585	1,751	2,765	4,288	9,978	3,463	12,30

Table 2.11 - Ground Clearance - STD Aircraft Model (@ +20 °C) (Continued)
Effectivity: EMBRAER 175-E2 ACFT

45700	31	0,15	2,787	1,701	0,514	3,609	1,736	2,743	4,266	9,945	3,432	12,19
45700	31	0,15	2,785	1,702	0,523	3,578	1,737	2,745	4,257	9,945	3,432	12,19
45700	31	0,15	2,788	1,701	0,514	3,612	1,736	2,743	4,267	9,945	3,432	12,19
45700	31	0,15	2,784	1,702	0,524	3,575	1,737	2,746	4,257	9,945	3,432	12,19
45500	25	0,05	2,772	1,691	0,516	3,603	1,751	2,764	4,294	9,979	3,464	12,30
45500	25	0,05	2,772	1,691	0,516	3,603	1,751	2,764	4,294	9,979	3,464	12,30
45500	31	0,15	2,786	1,702	0,520	3,593	1,737	2,745	4,263	9,946	3,433	12,19
45500	31	0,15	2,786	1,702	0,520	3,593	1,737	2,745	4,263	9,946	3,433	12,19
45500	25	0,05	2,774	1,691	0,512	3,619	1,751	2,763	4,298	9,979	3,465	12,30
45500	25	0,05	2,771	1,691	0,521	3,587	1,752	2,765	4,289	9,979	3,465	12,30
45500	25	0,05	2,774	1,690	0,511	3,623	1,751	2,763	4,300	9,979	3,465	12,30
45500	25	0,05	2,771	1,691	0,521	3,585	1,752	2,766	4,289	9,979	3,465	12,30
45500	31	0,15	2,788	1,701	0,515	3,610	1,737	2,744	4,267	9,946	3,433	12,19
45500	31	0,15	2,785	1,702	0,524	3,579	1,738	2,746	4,259	9,946	3,433	12,19
45500	31	0,15	2,788	1,701	0,514	3,612	1,737	2,744	4,268	9,946	3,433	12,19
45500	31	0,15	2,785	1,702	0,524	3,576	1,738	2,747	4,258	9,946	3,433	12,19
44170	20	-0,04	2,765	1,687	0,519	3,616	1,768	2,785	4,325	10,01 2	3,496	12,41
44170	20	-0,04	2,765	1,687	0,519	3,616	1,768	2,785	4,325	10,01 2	3,496	12,41
44170	20	-0,04	2,767	1,686	0,514	3,633	1,768	2,784	4,330	10,01 2	3,496	12,41
44170	20	-0,04	2,764	1,687	0,523	3,600	1,769	2,787	4,321	10,01 2	3,496	12,41
44170	20	-0,04	2,767	1,686	0,513	3,637	1,768	2,784	4,331	10,01 2	3,496	12,41
44170	20	-0,04	2,764	1,687	0,524	3,597	1,769	2,787	4,320	10,01 2	3,496	12,41
40500	20	-0,08	2,773	1,695	0,530	3,632	1,787	2,806	4,350	10,03 7	3,521	12,50
40500	20	-0,08	2,773	1,695	0,530	3,632	1,787	2,806	4,350	10,03 7	3,521	12,50
40500	37.1	0,24	2,818	1,730	0,541	3,603	1,743	2,746	4,253	9,935	3,423	12,15
40500	37.1	0,24	2,818	1,730	0,541	3,603	1,743	2,746	4,253	9,935	3,424	12,15
40500	20	-0,08	2,774	1,695	0,525	3,651	1,786	2,804	4,356	10,03 8	3,521	12,50
40500	20	-0,08	2,771	1,696	0,535	3,615	1,788	2,807	4,345	10,03 8	3,521	12,50
40500	20	-0,08	2,775	1,695	0,524	3,655	1,786	2,804	4,357	10,03 8	3,522	12,50



Table 2.11 - Ground Clearance - STD Aircraft Model (@ +20 °C) (Continued)

Effectivity: EMBRAER 175-E2 ACFT

40500	20	-0,08	2,771	1,696	0,536	3,611	1,788	2,808	4,344	10,03 ₈	3,522	12,50
40500	37.1	0,24	2,819	1,730	0,536	3,621	1,743	2,745	4,258	9,935	3,424	12,15
40500	37.1	0,24	2,816	1,731	0,546	3,588	1,744	2,748	4,249	9,935	3,424	12,15
40500	37.1	0,24	2,820	1,730	0,536	3,622	1,743	2,745	4,259	9,935	3,424	12,15
40500	37.1	0,24	2,816	1,731	0,546	3,588	1,744	2,748	4,249	9,935	3,424	12,15
38150	40	0,31	2,838	1,748	0,554	3,607	1,744	2,744	4,243	9,924	3,413	12,11
38150	40	0,31	2,838	1,748	0,554	3,607	1,745	2,744	4,243	9,924	3,413	12,11
38150	40	0,31	2,839	1,748	0,550	3,620	1,744	2,743	4,247	9,924	3,413	12,11
38150	40	0,31	2,837	1,749	0,557	3,597	1,745	2,745	4,240	9,924	3,413	12,11
38150	40	0,31	2,839	1,748	0,549	3,626	1,744	2,743	4,249	9,924	3,413	12,11
38150	40	0,31	2,836	1,749	0,559	3,590	1,745	2,746	4,238	9,924	3,413	12,11
38150	20	-0,10	2,777	1,700	0,537	3,642	1,798	2,818	4,365	10,05 ₃	3,536	12,55
38150	39.6	0,30	2,835	1,746	0,552	3,607	1,744	2,744	4,244	9,926	3,415	12,12
29200	20	-0,24	2,803	1,730	0,578	3,700	1,861	2,888	4,452	10,14 ₁	3,623	12,85
32200	40	0,26	2,859	1,771	0,580	3,639	1,778	2,780	4,283	9,965	3,454	12,25
26200	23.5	-0,23	2,823	1,750	0,597	3,718	1,879	2,906	4,469	10,15 ₈	3,640	12,90
26200	30	-0,10	2,842	1,765	0,601	3,705	1,860	2,880	4,427	10,11 ₄	3,598	12,75

Table 2.12 - Ground Clearance - STD Aircraft Model (@ +54 °C)

Effectivity: EMBRAER 175-E2 ACFT

WEIGHT (Kg)	CG (%MAC)	FUS ANGL E (DEG) (A)	MAIN FRONT DOOR (m) (B)	FRONT BAG DOOR (m) (C)	NACELLE (m) (D)	LEFT WING TIP (m) (E)	REAR BAG DOOR (m) (F)	REAR MAIN DOOR (m) (G)	LEFT HT TIP (m) (J)	VERTICAL TAIL (m) (K)	FUS TAN POINT (m) (H)	TAIL ANGL E (dg) (I)
45700	25	-0,02	2,797	1,717	0,547	3,641	1,793	2,809	4,346	10,03 ₂	3,517	12,48
45700	25	-0,02	2,797	1,717	0,547	3,641	1,793	2,809	4,346	10,03 ₂	3,517	12,48
45700	31	0,09	2,811	1,728	0,551	3,631	1,778	2,789	4,313	9,998	3,484	12,36
45700	31	0,09	2,811	1,728	0,551	3,631	1,778	2,789	4,313	9,998	3,484	12,36
45700	25	-0,02	2,798	1,717	0,543	3,658	1,792	2,807	4,350	10,03 ₂	3,517	12,48
45700	25	-0,02	2,795	1,718	0,552	3,626	1,794	2,810	4,341	10,03 ₂	3,517	12,48
45700	25	-0,02	2,798	1,717	0,541	3,662	1,792	2,807	4,352	10,03 ₂	3,517	12,48

Table 2.12 - Ground Clearance - STD Aircraft Model (@ +54 °C) (Continued)
Effectivity: EMBRAER 175-E2 ACFT

45700	25	-0,02	2,795	1,718	0,552	3,624	1,794	2,810	4,341	10,03 2	3,517	12,48
45700	31	0,09	2,813	1,728	0,546	3,648	1,778	2,788	4,318	9,998	3,484	12,36
45700	31	0,09	2,810	1,729	0,555	3,617	1,779	2,790	4,309	9,998	3,484	12,36
45700	31	0,09	2,813	1,728	0,545	3,651	1,778	2,787	4,319	9,998	3,484	12,36
45700	31	0,09	2,810	1,729	0,556	3,614	1,779	2,790	4,308	9,998	3,484	12,36
45500	25	-0,02	2,797	1,718	0,548	3,642	1,794	2,810	4,347	10,03 3	3,518	12,48
45500	25	-0,02	2,797	1,718	0,548	3,642	1,794	2,810	4,347	10,03 3	3,518	12,48
45500	31	0,09	2,812	1,729	0,551	3,632	1,779	2,790	4,315	9,999	3,485	12,37
45500	31	0,09	2,812	1,729	0,551	3,632	1,779	2,790	4,315	9,999	3,485	12,37
45500	25	-0,02	2,799	1,717	0,543	3,659	1,793	2,808	4,352	10,03 3	3,518	12,48
45500	25	-0,02	2,796	1,718	0,552	3,626	1,794	2,811	4,343	10,03 3	3,518	12,48
45500	25	-0,02	2,799	1,717	0,542	3,663	1,793	2,808	4,353	10,03 3	3,518	12,48
45500	25	-0,02	2,795	1,718	0,553	3,624	1,795	2,811	4,342	10,03 3	3,518	12,48
45500	31	0,09	2,813	1,728	0,546	3,649	1,779	2,789	4,320	9,999	3,485	12,37
45500	31	0,09	2,810	1,729	0,555	3,618	1,780	2,791	4,310	9,999	3,485	12,37
45500	31	0,09	2,813	1,728	0,546	3,652	1,779	2,788	4,320	9,999	3,485	12,37
45500	31	0,09	2,810	1,729	0,556	3,615	1,780	2,791	4,310	9,999	3,485	12,37
44170	20	-0,11	2,790	1,713	0,550	3,656	1,811	2,832	4,379	10,06 7	3,551	12,60
44170	20	-0,11	2,790	1,713	0,550	3,656	1,811	2,832	4,379	10,06 7	3,551	12,60
44170	20	-0,11	2,791	1,712	0,545	3,674	1,811	2,830	4,385	10,06 7	3,551	12,60
44170	20	-0,11	2,788	1,713	0,555	3,640	1,812	2,833	4,375	10,06 7	3,551	12,60
44170	20	-0,11	2,792	1,712	0,544	3,677	1,811	2,830	4,386	10,06 7	3,551	12,60
44170	20	-0,11	2,788	1,714	0,556	3,637	1,812	2,833	4,374	10,06 7	3,551	12,60
40500	20	-0,15	2,797	1,722	0,562	3,673	1,831	2,853	4,406	10,09 4	3,577	12,69
40500	20	-0,15	2,797	1,722	0,562	3,673	1,831	2,853	4,406	10,09 4	3,577	12,69
40500	37.1	0,19	2,846	1,760	0,574	3,642	1,785	2,790	4,302	9,985	3,473	12,32
40500	37.1	0,19	2,846	1,760	0,574	3,642	1,785	2,790	4,302	9,985	3,473	12,32



Table 2.12 - Ground Clearance - STD Aircraft Model (@ +54 °C) (Continued)

Effectivity: EMBRAER 175-E2 ACFT

40500	20	-0,15	2,799	1,722	0,557	3,692	1,830	2,852	4,411	10,09 4	3,577	12,69
40500	20	-0,15	2,796	1,723	0,568	3,655	1,831	2,855	4,401	10,09 4	3,577	12,69
40500	20	-0,15	2,800	1,721	0,556	3,696	1,830	2,851	4,413	10,09 4	3,577	12,69
40500	20	-0,15	2,795	1,723	0,569	3,651	1,832	2,855	4,400	10,09 4	3,577	12,69
40500	37.1	0,19	2,847	1,759	0,569	3,660	1,784	2,789	4,308	9,985	3,473	12,32
40500	37.1	0,19	2,844	1,760	0,579	3,626	1,785	2,791	4,298	9,985	3,473	12,32
40500	37.1	0,19	2,847	1,759	0,569	3,661	1,784	2,789	4,308	9,985	3,473	12,32
40500	37.1	0,19	2,844	1,760	0,579	3,626	1,785	2,791	4,298	9,985	3,473	12,32
38150	40	0,27	2,868	1,779	0,588	3,646	1,785	2,787	4,290	9,972	3,460	12,27
38150	40	0,27	2,867	1,779	0,588	3,646	1,785	2,787	4,290	9,972	3,461	12,27
38150	40	0,27	2,869	1,779	0,584	3,660	1,785	2,786	4,294	9,972	3,460	12,27
38150	40	0,27	2,867	1,780	0,591	3,636	1,785	2,788	4,287	9,972	3,460	12,27
38150	40	0,27	2,869	1,779	0,582	3,666	1,785	2,785	4,296	9,972	3,461	12,27
38150	40	0,27	2,866	1,780	0,593	3,629	1,786	2,788	4,285	9,972	3,461	12,27
38150	20	-0,17	2,802	1,727	0,570	3,684	1,842	2,866	4,422	10,11 0	3,593	12,74
38150	39.6	0,26	2,864	1,776	0,586	3,646	1,785	2,787	4,292	9,974	3,462	12,28
29200	20	-0,32	2,830	1,760	0,613	3,744	1,910	2,941	4,513	10,20 4	3,685	13,05
32200	40	0,23	2,892	1,805	0,616	3,679	1,819	2,823	4,331	10,01 3	3,501	12,41
26200	23.5	-0,31	2,851	1,780	0,633	3,764	1,929	2,960	4,532	10,22 2	3,703	13,11
26200	30	-0,16	2,872	1,797	0,638	3,750	1,909	2,932	4,486	10,17 4	3,657	12,95

2.3. **INTERIOR ARRANGEMENTS**

EFFECTIVITY: EMBRAER 190-E2 ACFT

The interior arrangement provides accommodation for two pilots, one observer, two flight attendants, 104 passengers in 31 in pitch nominal configuration and 114 passengers in 29 in pitch maximum configuration. One additional flight attendant seat is available as optional.

2.3.1. Passenger Cabin

EFFECTIVITY: EMBRAER 190-E2 ACFT

The passenger cabin accommodates 104 passengers in 26 double seats on both sides, in 0.7874 m (31 in) pitch nominal configuration and 114 passengers in 28 double seats on LH and 29 double seats on RH, in 0.7366 m (29 in) pitch maximum configuration.

As optional, the passenger cabin is also provided with some double first-class seats on the RH side and some single first-class seats on the LH side.

The main dimensions of passenger cabin are presented below:


- Height - 2.00 m (6 ft 7 in.)
- Width - 2.74 m (9 ft)
- Aisle wide - 0.49 m (1 ft 7 in.)
- Pitch - 0.79 m (31 in.) in pitch nominal configuration and 0.74 m (29 in.) in pitch maximum configuration.



EFFECTIVITY: EMBRAER 190-E2 ACFT

Typical Interior Arrangements - 104 Pax Single Class at 0.7874 m (31 in) pitch nominal configuration

Figure 2.8

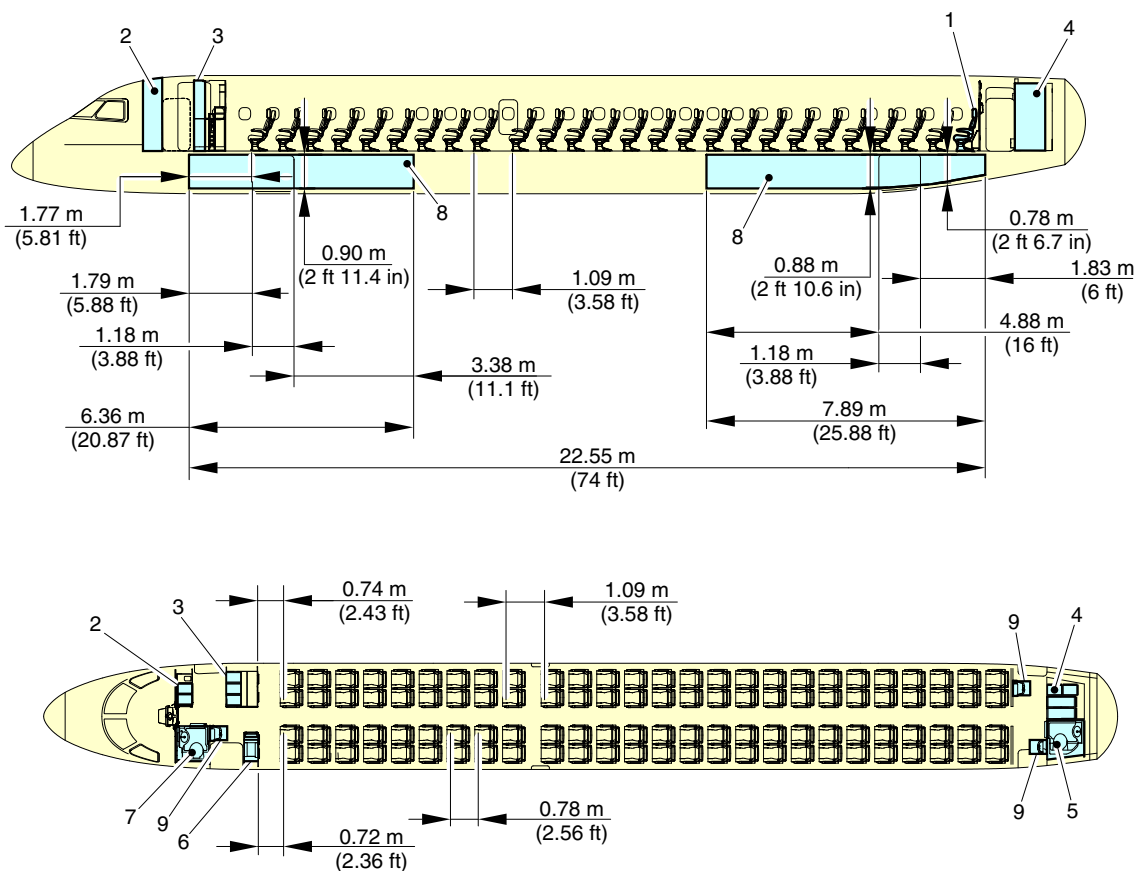

1 - NO RECLINING SEAT AT THIS ROW

2 - GALLEY G1

3 - GALLEY G2/STOWAGE

4 - GALLEY G5

5 - AFT TOILET

6 - LH FWD STOWAGE

7 - FWD TOILET

8 - CARGO COMPARTMENT


9 - FLIGHT ATTENDANT SEAT

CARGO/BAGGAGE VOLUME	
CARGO COMPARTMENT	22.63 m ³ (799.18 ft ³)
OVERHEAD BIN	0.06 m ³ / pax (2.0 ft ³ / pax)
UNDERSEAT VOLUME	0.04 m ³ / pax (1.4 ft ³ / pax)

EM170E2APM020003C.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT

Typical Interior Arrangements - 114 Pax Single Class at 0.7366 m (29 in) pitch maximum configuration
Figure 2.9

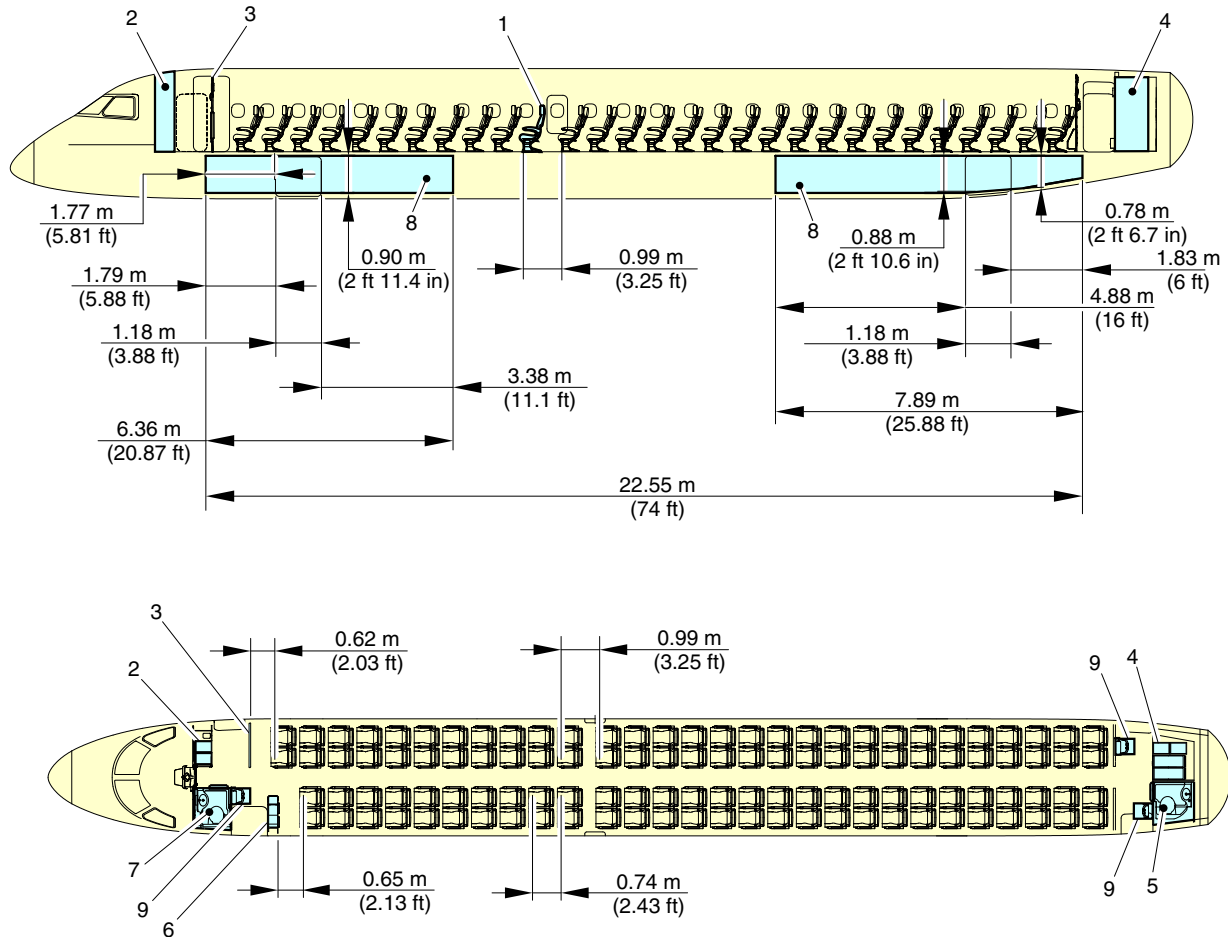

- 1 - NO RECLINING SEAT AT THIS ROW
- 2 - GALLEY G1
- 3 - FWD PARTITION
- 4 - GALLEY G5


- 5 - AFT TOILET
- 6 - LH FWD STOWAGE
- 7 - FWD TOILET
- 8 - CARGO COMPARTMENT
- 9 - FLIGHT ATTENDANT SEAT

CARGO/BAGGAGE VOLUME	
CARGO COMPARTMENT	22.63 m ³ (799.18 ft ³)
OVERHEAD BIN	0.06 m ³ / pax (2.0 ft ³ / pax)
UNDERSEAT VOLUME	0.04 m ³ / pax (1.4 ft ³ / pax)

EFFECTIVITY: EMBRAER 190-E2 ACFT

Typical Interior Arrangements - 96 Pax Dual Class at 0.9652/0.7874 m (38/31 in) pitch configuration

Figure 2.10

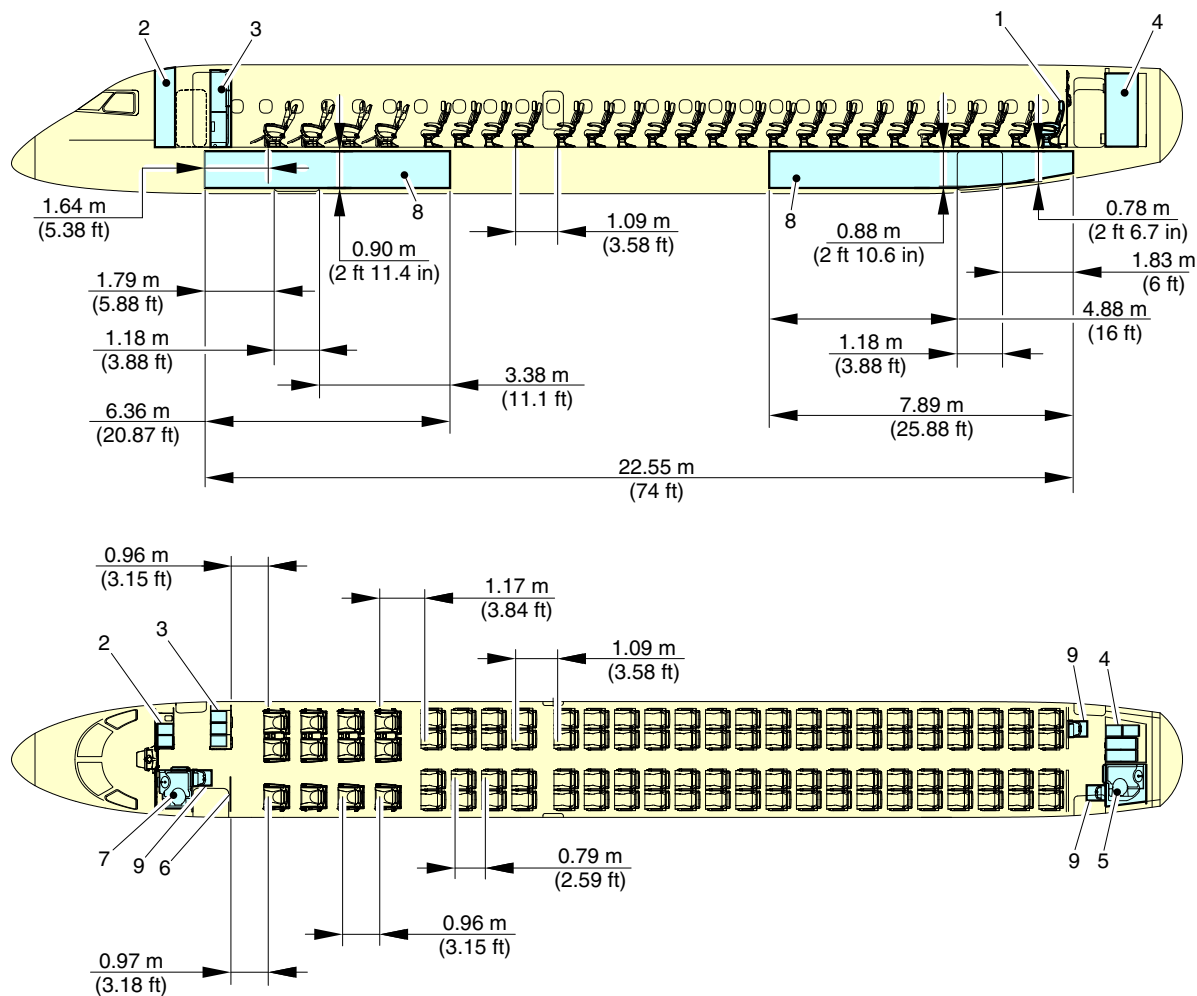

1 - NO RECLINING SEAT AT THIS ROW

2 - GALLEY G1

3 - GALLEY G2

4 - GALLEY G5

5 - AFT TOILET

6 - FWD PARTITION

7 - FWD TOILET

8 - CARGO COMPARTMENT

9 - FLIGHT ATTENDANT SEAT

CARGO/BAGGAGE VOLUME	
CARGO COMPARTMENT	22.63 m ³ (799.18 ft ³)
OVERHEAD BIN	0.06 m ³ / pax (2.0 ft ³ / pax)
UNDERSEAT VOLUME	0.04 m ³ / pax (1.4 ft ³ / pax)

EM170E2APM020005C.IDR

2.3.2. Cargo Compartments

EFFECTIVITY: EMBRAER 190-E2 ACFT

Two cargo compartments are available, located underfloor, one forward of the wing, and another aft of the wing.

The cargo compartments comply with the FAR-25/JAR-25/RBHA-25 “class C” compartment classification.

The table below contains the capacity for the cargo compartment:

Table 2.13 - Capacity for the Cargo Compartment

Effectivity: EMBRAER 190-E2 ACFT

CARGO COMPARTMENT	LOADING	VOLUME
FWD ^[1]	1590 kg (3505 lb)	10.09 m ³ (356.3 ft ³)
Aft	1910 kg (4211 lb)	11.45 m ³ (404.4 ft ³)
Total	3500 kg (7716 lb)	21.54 m ³ (760.7 ft ³)

[1] Standard configuration (loading and volume may vary according to optional equipment installed).

2.3.3. Cockpit

The cockpit is acoustically and thermally insulated for appearance and durability. It follows the worldwide trend of rounded edges, which avoids harm to the flight crew.

The cockpit is separated from the passenger cabin by a bulkhead with a lockable door. The cockpit door is provided with lockable means operable only from the cockpit side, spy hole and escape mechanism on the cockpit side.

2.4. **INTERIOR ARRANGEMENTS**

EFFECTIVITY: EMBRAER 195-E2 ACFT

The interior arrangement provides accommodation for two pilots, one observer, three flight attendants, 138 passengers in 29 in pitch nominal configuration and 146 passengers in 28 in pitch maximum configuration. One additional flight attendant seat is available as optional.

2.4.1. Passenger Cabin

The passenger cabin accommodates 138 passengers in 35 double seats on the RH side and 34 double seats on the LH side, in 0.7366 m (29 in) pitch nominal configuration and 146 passengers in 36 double seats on LH and 37 double seats on RH, in 0.7112 m (28 in) pitch maximum configuration.

As optional, the passenger cabin is also provided with some double first-class seats on the RH side and some single first-class seats on the LH side.


The main dimensions of passenger cabin are presented below:

- Height - 2.00 m (6 ft 7 in.)
- Width - 2.52 m (8 ft 3.24 in.)
- Aisle wide - 0.49 m (1 ft 7 in.)
- Pitch - 0.74 m (29 in.) in pitch nominal configuration and 0.71 m (28 in.) in pitch maximum configuration.

EFFECTIVITY: EMBRAER 195-E2 ACFT

Typical Interior Arrangements - 132 Pax Single Class at 0.7874 m (31 in) pitch nominal configuration

Figure 2.11

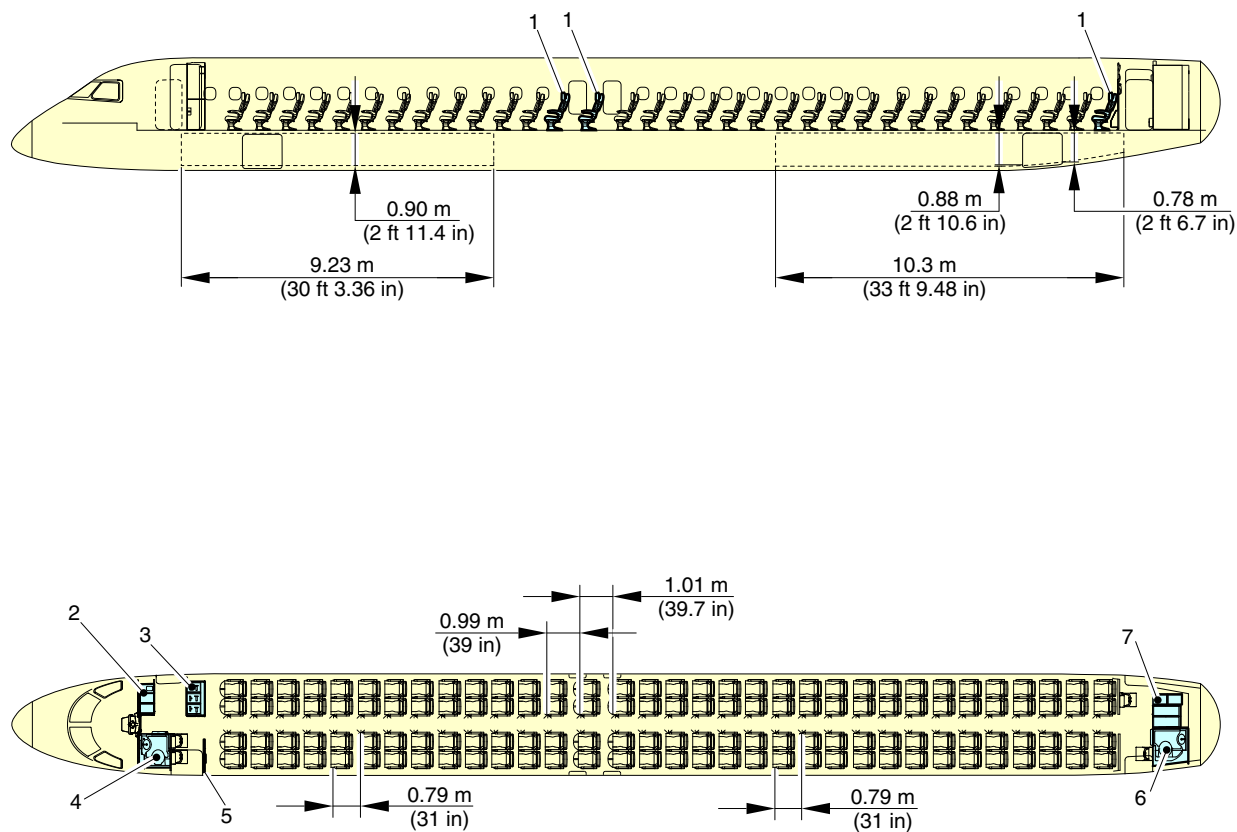

- 1 - NO RECLINING SEAT AT THIS ROW
- 2 - GALLEY G1
- 3 - GALLEY G2
- 4 - FWD TOILET



- 5 - HARD PARTITION
- 6 - AFT TOILET
- 7 - GALLEY G5

EM170E2APM020010B.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT

Typical Interior Arrangements - 120 Pax Dual Class at 0.965/0.7874 m (38/31 in) pitch configuration

Figure 2.12

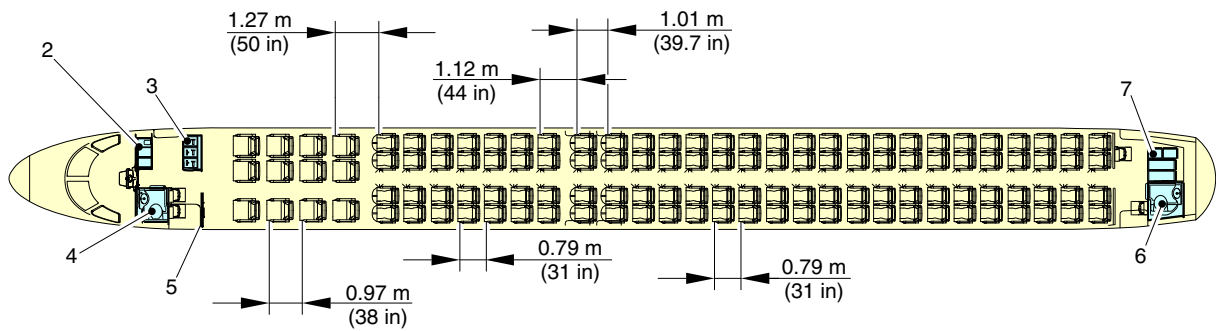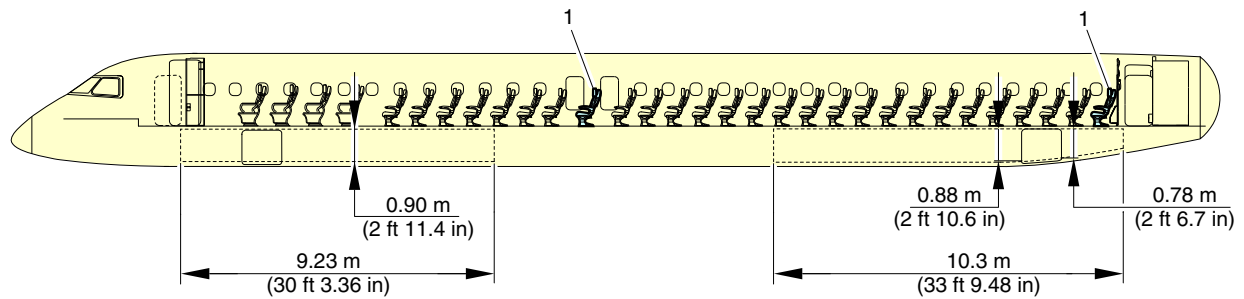


- 1 - NO RECLINING SEAT AT THIS ROW
- 2 - GALLEY G1
- 3 - GALLEY G2
- 4 - FWD TOILET

- 5 - LH WINDSCREEN
- 6 - AFT TOILET
- 7 - GALLEY G5

EFFECTIVITY: EMBRAER 195-E2 ACFT

Typical Interior Arrangements - 138 Pax Single Class at 0.7366 m (29 in) pitch nominal configuration

Figure 2.13

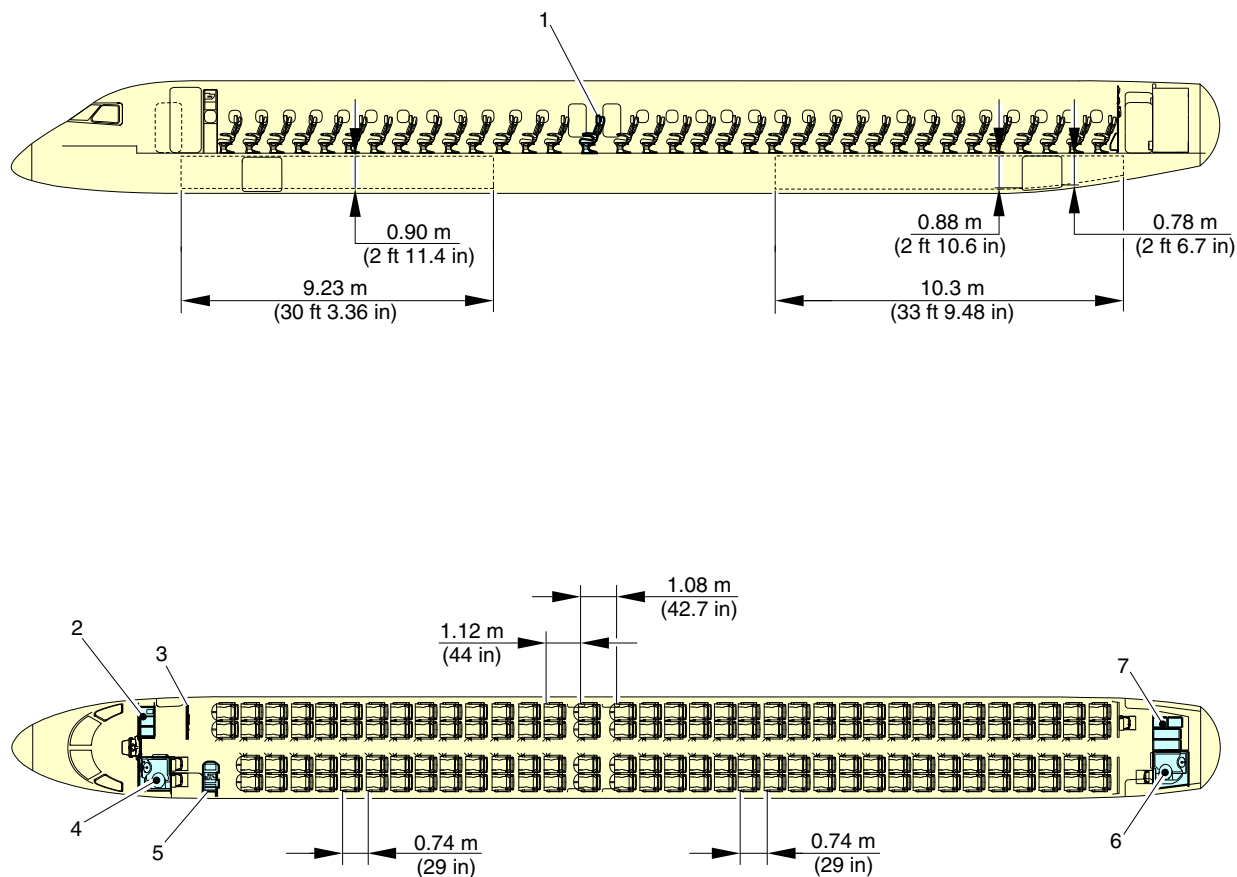



- 1 - NO RECLINING SEAT AT THIS ROW
- 2 - GALLEY G1
- 3 - WINDSCREEN
- 4 - FWD TOILET

- 5 - LH STOWAGE
- 6 - AFT TOILET
- 7 - GALLEY G5

EM170E2APM020012B.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT

Typical Interior Arrangements - 146 Pax Single Class at 0.7112 m (28 in) pitch nominal configuration
Figure 2.14

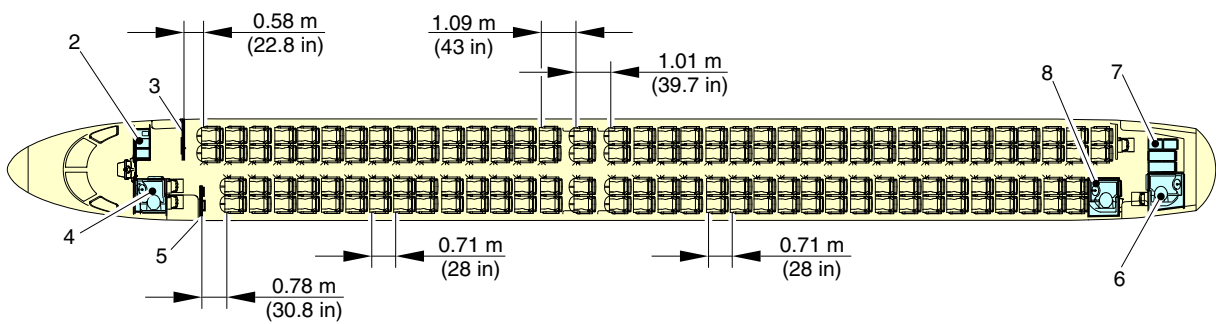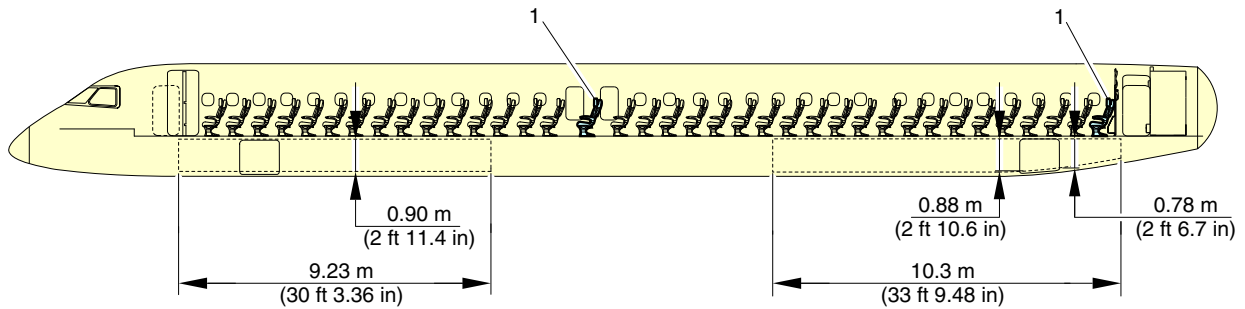

- 1 - NO RECLINING SEAT AT THIS ROW
- 2 - GALLEY G1
- 3 - RH WINDSCREEN (HIGH DENSITY)
- 4 - FWD TOILET

- 5 - LH WINDSCREEN
- 6 - AFT TOILET
- 7 - GALLEY G5
- 8 - THIRD TOILET



2.4.2. Cargo Compartments

EFFECTIVITY: EMBRAER 195-E2 ACFT

Two cargo compartments are available, located underfloor, one forward of the wing, and another aft of the wing.

The cargo compartments comply with the FAR-25/JAR-25/RBHA-25 "class C" compartment classification.

The table below contains the capacity for the cargo compartment:

Table 2.14 - Capacity for the Cargo Compartment

Effectivity: EMBRAER 195-E2 ACFT

CARGO COMPARTMENT	LOADING	VOLUME
FWD ^[1]	2375 kg (5236 lb)	14.77 m ³ (521.6 ft ³)
Aft	2555 kg (5632.8 lb)	15.20 m ³ (536.8 ft ³)
Total	4930 kg (10868.8 lb)	29.97 m ³ (1058.4 ft ³)

[1] Standard configuration (loading and volume may vary according to optional equipment installed).

2.4.3. Cockpit

The cockpit is acoustically and thermally insulated for appearance and durability. It follows the worldwide trend of rounded edges, which avoids harm to the flight crew.

The cockpit is separated from the passenger cabin by a bulkhead with a lockable door. The cockpit door is provided with lockable means operable only from the cockpit side, spy hole and escape mechanism on the cockpit side.

2.5. **INTERIOR ARRANGEMENTS**

EFFECTIVITY: EMBRAER 175-E2 ACFT

The interior arrangement provides accommodation for two pilots, one observer, two flight attendants, 88 passengers in 31in pitch nominal configuration and 90 passengers in 29 in pitch maximum configuration. One additional flight attendant seat is available as optional.

2.5.1. Passenger Cabin

The passenger cabin accommodates 88 passengers in 22 double seats on both sides, in 0.7874 m (31 in) pitch nominal configuration and 90 passengers in 23 double seats on LH and 22 double seats on RH, in 0.7366 m (29 in) pitch maximum configuration.


As optional, the passenger cabin is also provided with some double first-class seats on the RH side and some single first-class seats on the LH side.

The main dimensions of passenger cabin are presented below:

- Height - 2 m (6 ft 7in.)
- Width - 2.52 m (8 ft 3.24in.)
- Aisle wide - 0.49 m (1 ft 7 in.)
- Pitch - 0.74 m (29 in.) in pitch nominal configuration and 0.71 m (28 in.) in pitch maximum configuration.

EFFECTIVITY: EMBRAER 175-E2 ACFT

Typical Interior Arrangements - 88 Pax Single Class at 0.7874 m (31 in) pitch nominal configuration
Figure 2.15

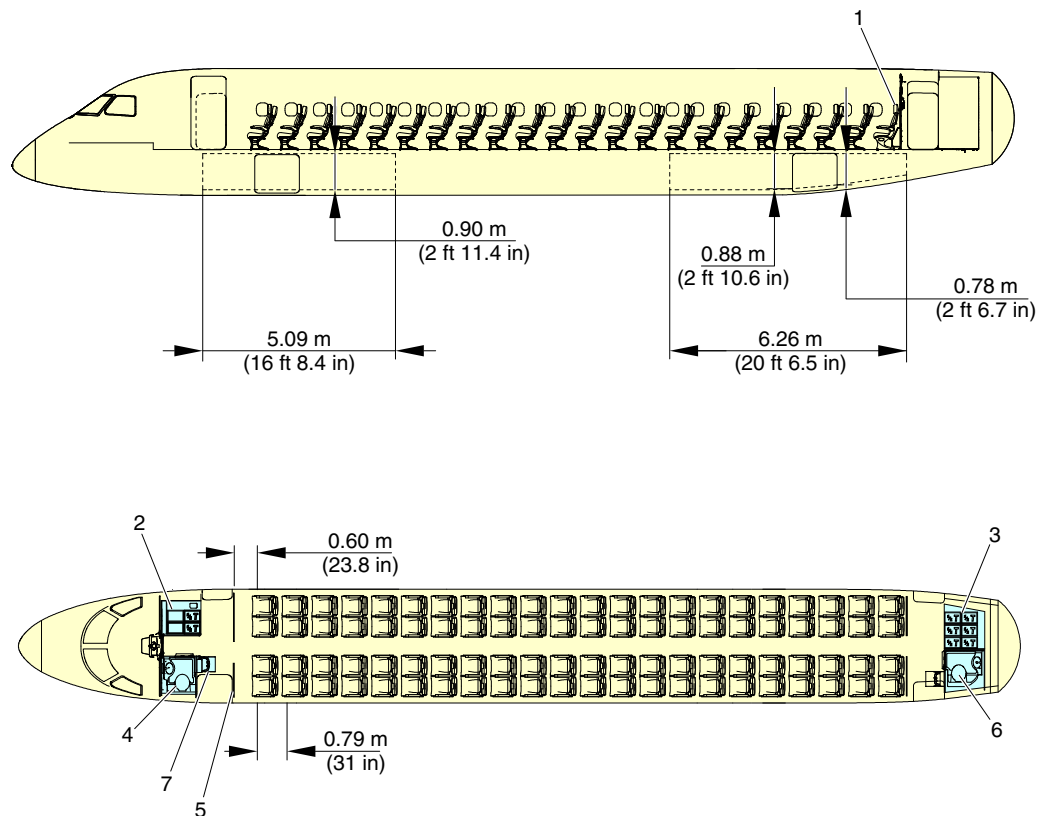

1 - NO RECLINING SEAT AT THIS ROW

2 - STOWAGE / GALLEY G1

3 - GALLEY G3

4 - FWD TOILET

5 - FWD PARTITION


6 - AFT TOILET

7 - ATTENDANT SEAT

EFFECTIVITY: EMBRAER 175-E2 ACFT

Typical Interior Arrangements - 80 Pax Dual Class at 0.9144 / 0.7874 m (36/31 in) pitch configuration

Figure 2.16

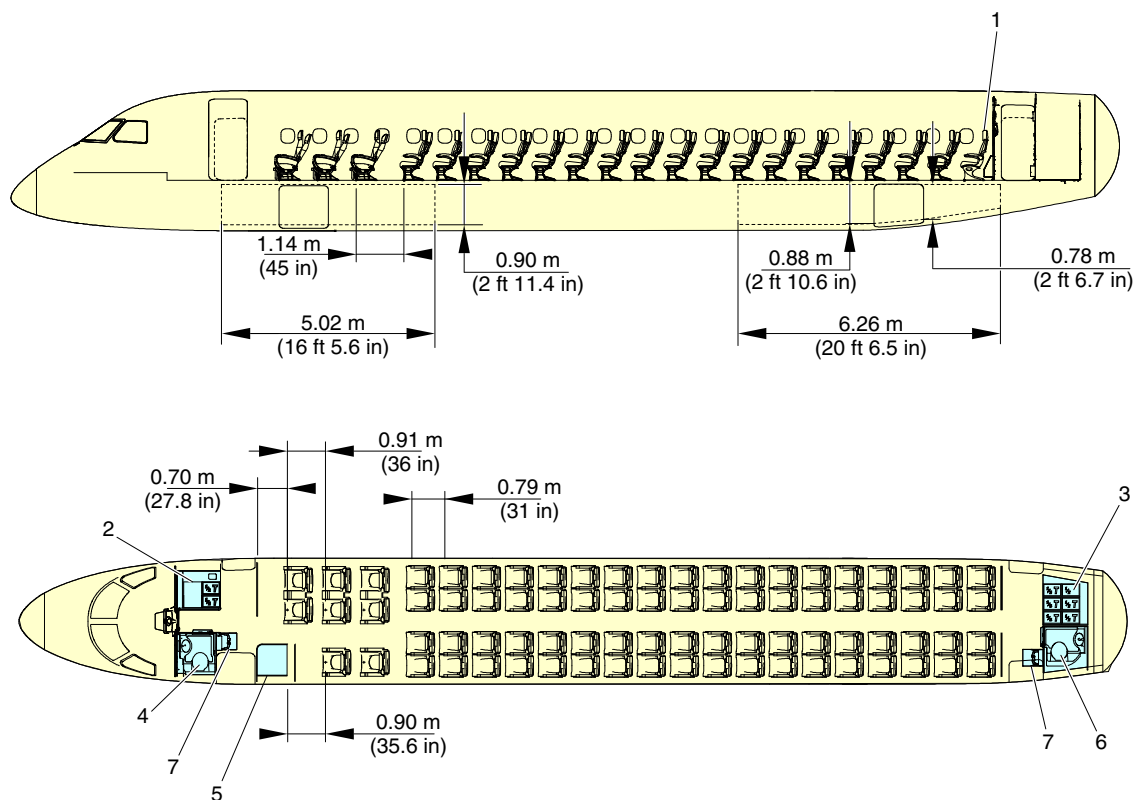

1 - NO RECLINING SEAT AT THIS ROW

2 - STOWAGE / GALLEY G1

3 - GALLEY G3

4 - FWD TOILET

5 - LH FWD STOWAGE

6 - AFT TOILET


7 - ATTENDANT SEAT

EM170E2APM020020A.IDR

EFFECTIVITY: EMBRAER 175-E2 ACFT

Typical Interior Arrangements - 80 Pax Three Classes at 0.9144 / 0.8636 / 0.762 m (36/34/30 in) pitch configuration

Figure 2.17

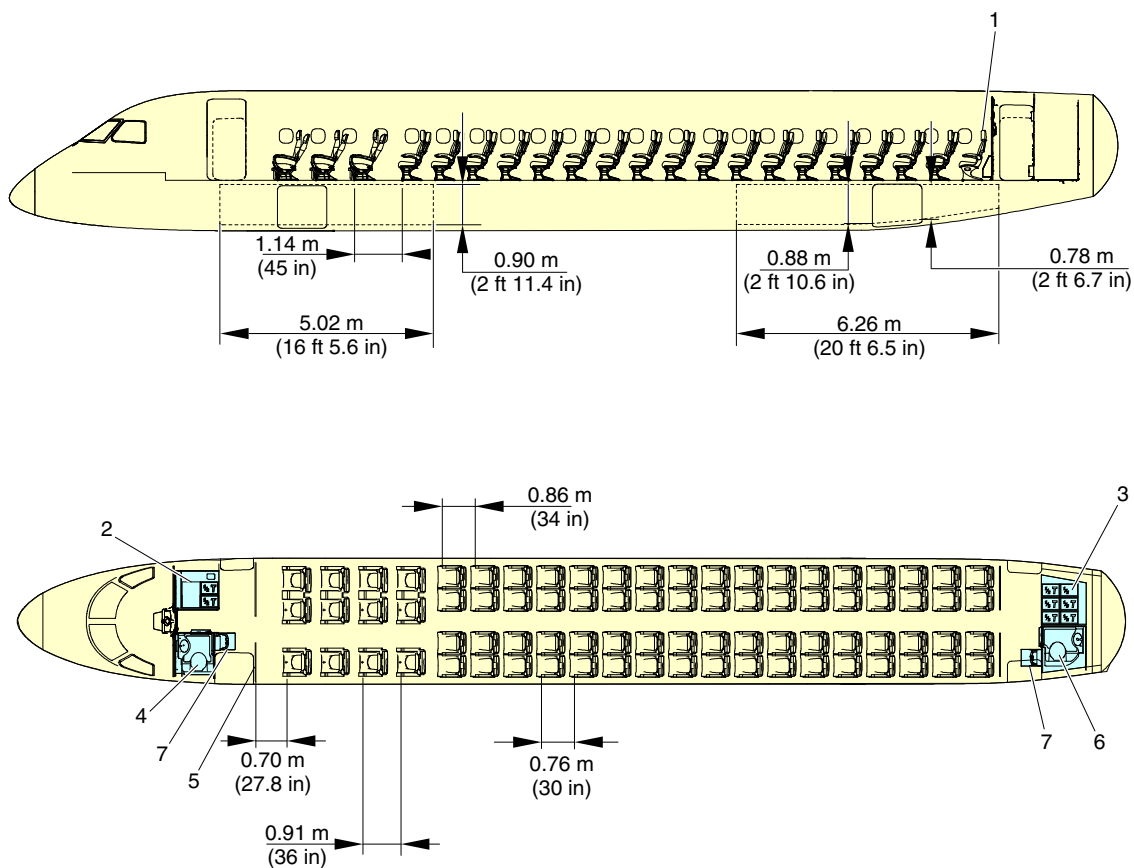

1 - NO RECLINING SEAT AT THIS ROW

2 - STOWAGE / GALLEY G1

3 - GALLEY G3

4 - FWD TOILET

5 - FWD PARTITION

6 - AFT TOILET


7 - ATTENDANT SEAT

EM170E2APM020020A.IDR

EFFECTIVITY: EMBRAER 175-E2 ACFT

Typical Interior Arrangements - 90 Pax Single Class at 0.7366 m (29 in) pitch configuration

Figure 2.18

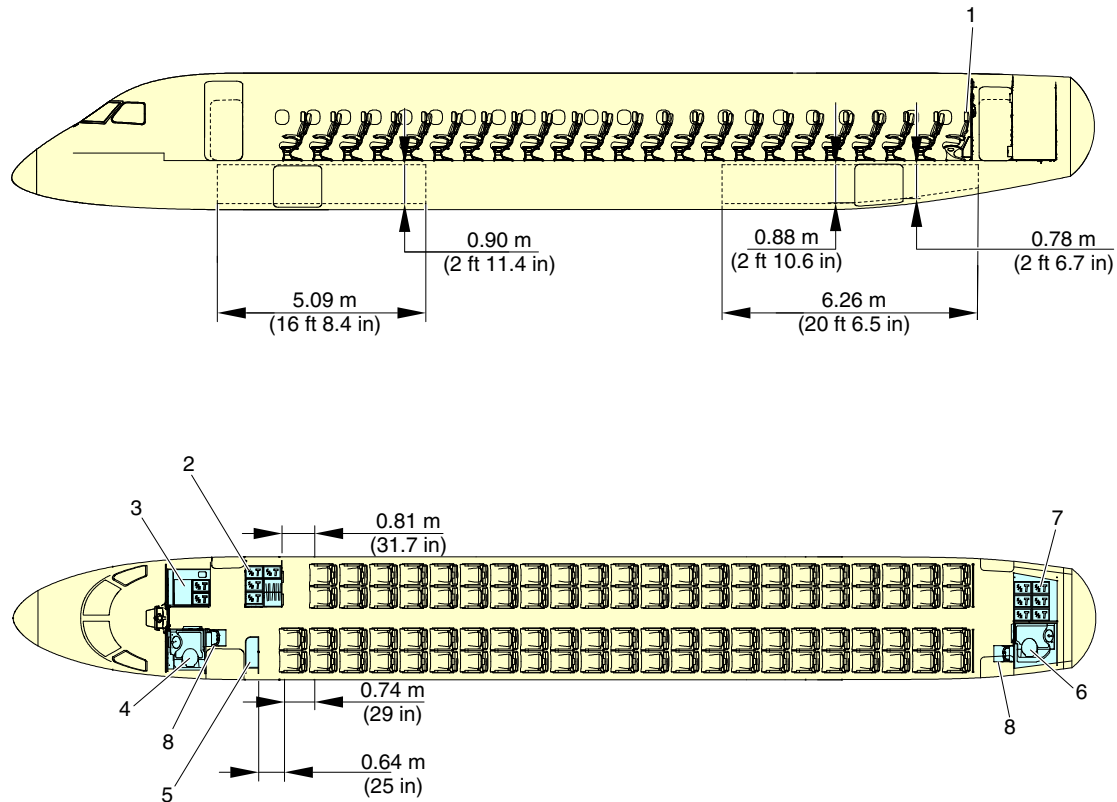

1 - NO RECLINING SEAT AT THIS ROW

2 - STOWAGE / GALLEY G2

3 - STOWAGE / GALLEY G1

4 - FWD TOILET

5 - LH FWD STOWAGE

6 - AFT TOILET

7 - GALLEY G3

8 - ATTENDANT SEAT

EM170E2APM020022A.IDR

2.5.2. Cargo Compartments

EFFECTIVITY: EMBRAER 175-E2 ACFT

Two cargo compartments are available, located underfloor, one forward of the wing, and another aft of the wing.

The cargo compartments comply with the FAR-25/JAR-25/RBHA-25 "class C" compartment classification.

The table below contains the capacity for the cargo compartment:

Table 2.15 - Capacity for the Cargo Compartment

Effectivity: EMBRAER 175-E2 ACFT

CARGO COMPARTMENT	LOADING	VOLUME
FWD ^[1]	1500 kg (3307 lb)	8.18 m ³ (288.2 ft ³)
Aft	1150 kg (2535 lb)	8.89 m ³ (313.9 ft ³)
Total	2650 kg (5842 lb)	17.07 m ³ (602.1 ft ³)

[1] Standard configuration (loading and volume may vary according to optional equipment installed)

2.5.3. Cockpit

The cockpit is acoustically and thermally insulated for appearance and durability. It follows the worldwide trend of rounded edges, which avoids harm to the flight crew.

The cockpit is separated from the passenger cabin by a bulkhead with a lockable door. The cockpit door is provided with lockable means operable only from the cockpit side, spy hole and escape mechanism on the cockpit side.


2.6. PASSENGER CABIN CROSS SECTION



EFFECTIVITY: EMBRAER 190-E2 ACFT


Economy Class Passenger Cabin Cross-Section

Figure 2.19

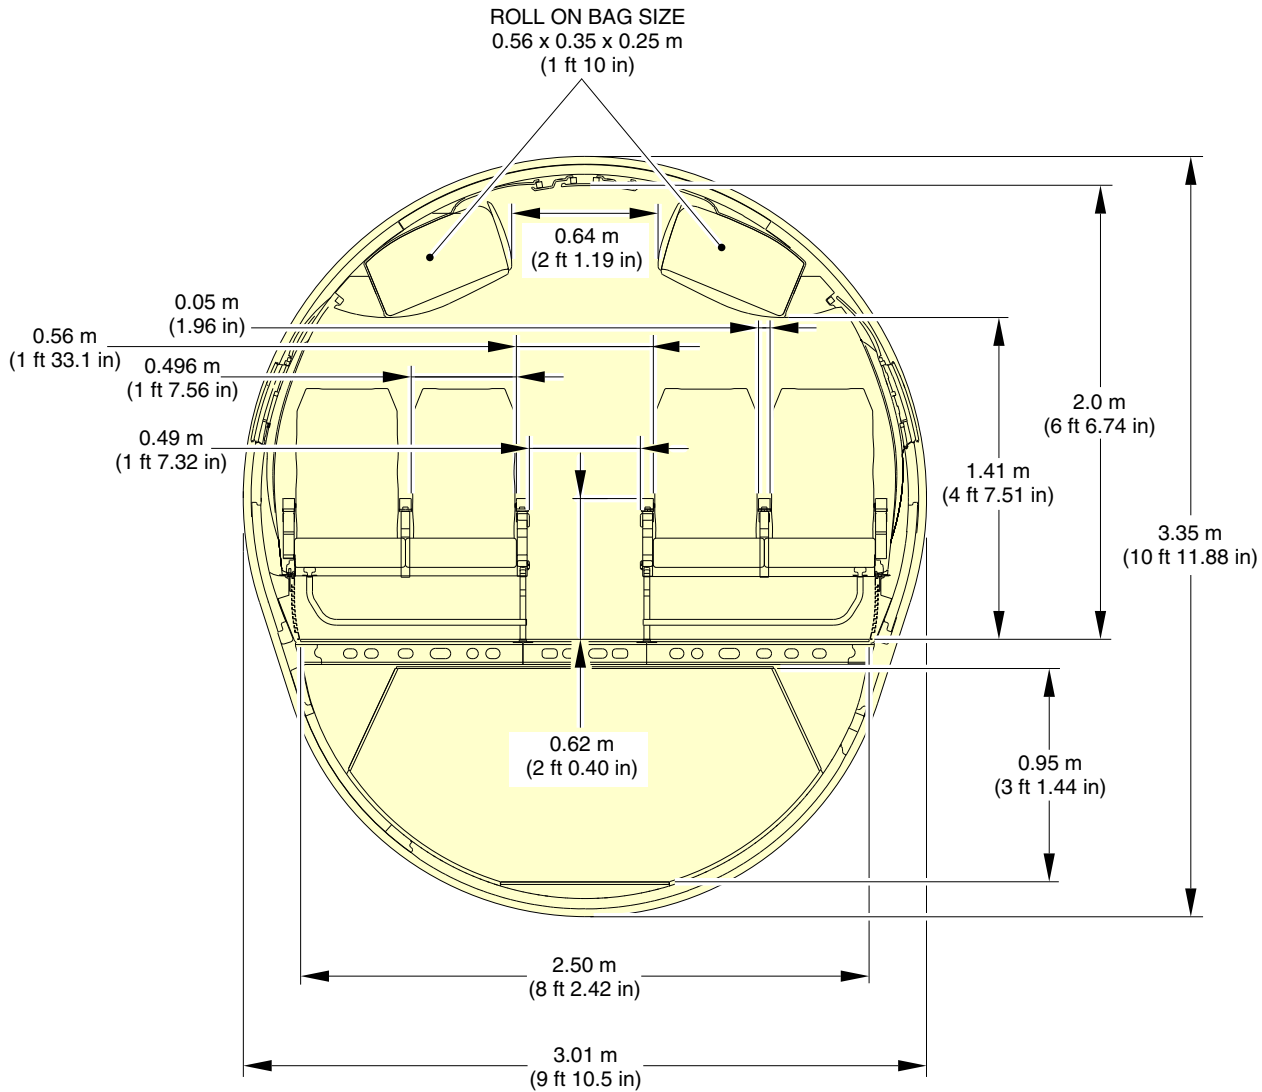

EM170E2APM020009B.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
Economy Class Passenger Cabin Cross-Section
Figure 2.20

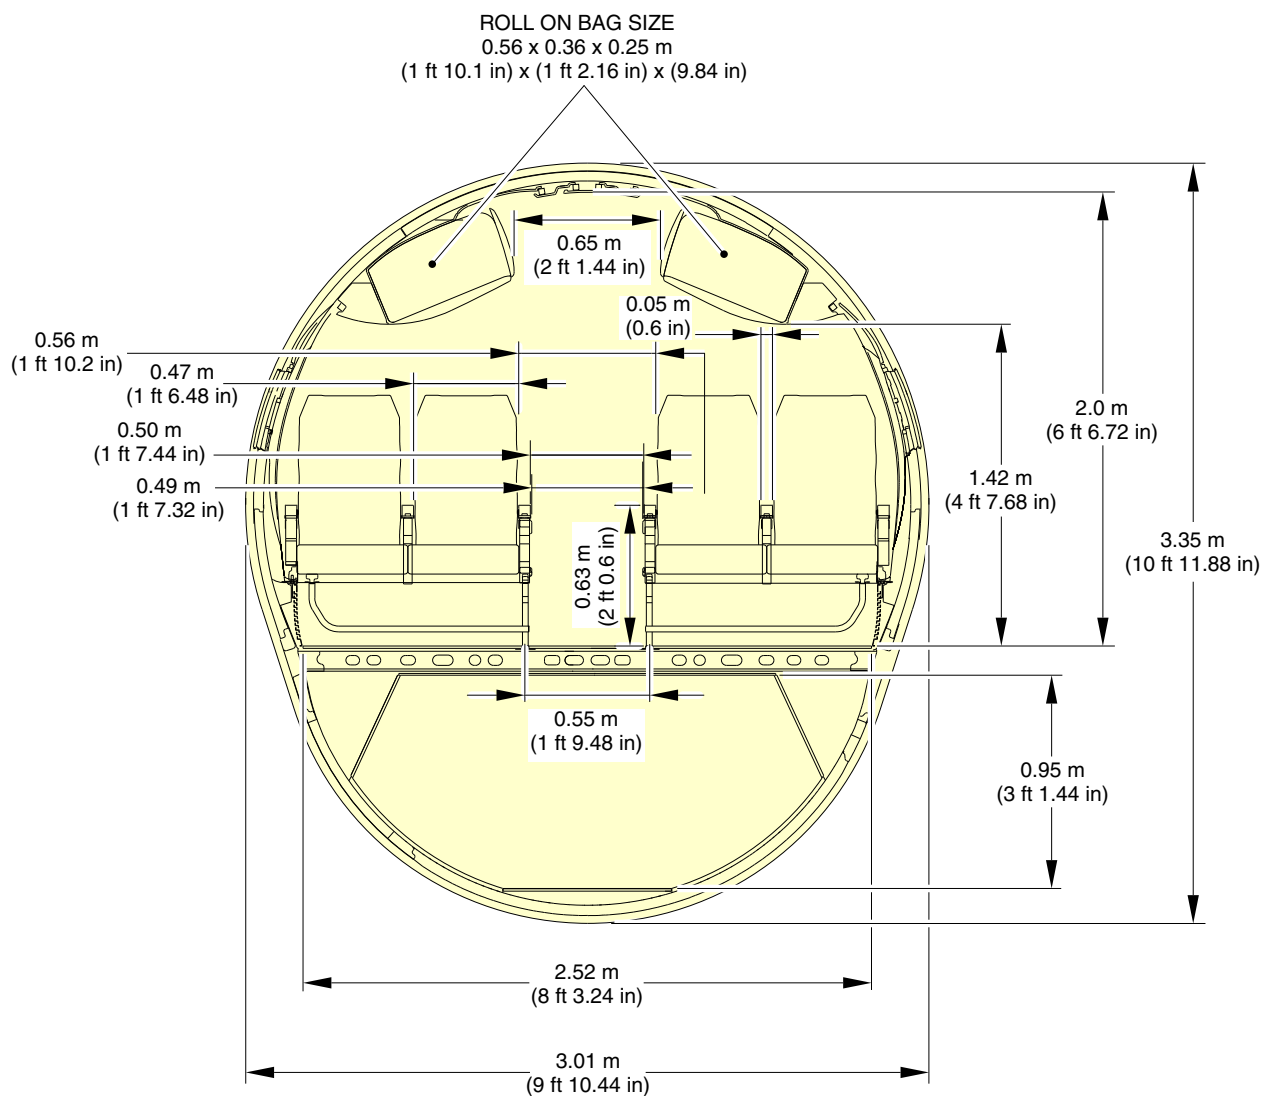

EM170E2APM020016A.IDR




EFFECTIVITY: EMBRAER 175-E2 ACFT

Economy Class Passenger Cabin Cross-Section

Figure 2.21

ROLL ON BAG SIZE:
0.558 x 0.356 x 0.254 m
(1.83 x 1.17 x 0.83 ft)

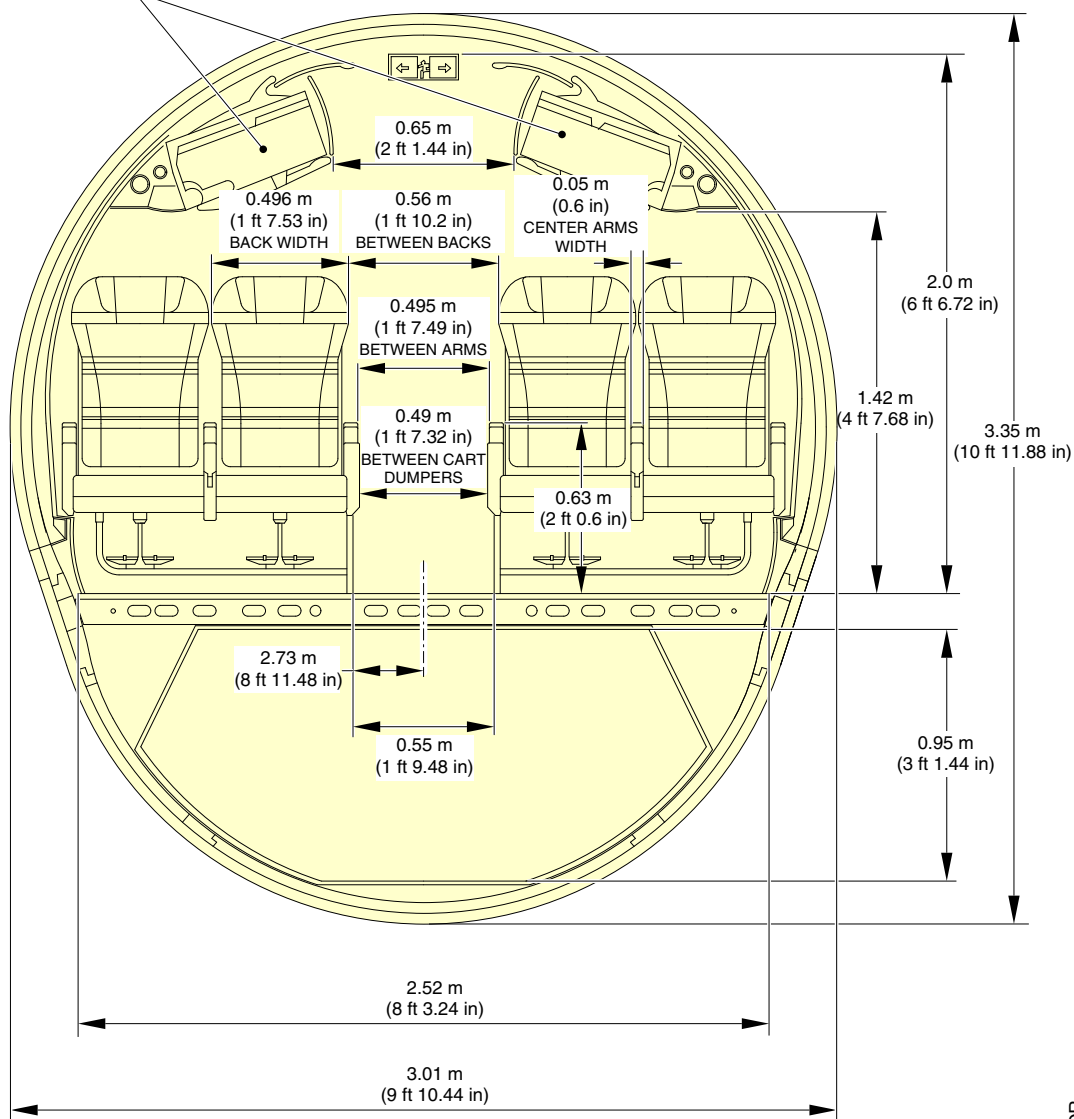

EM170E2APM020018A.IDR

3. AIRCRAFT PERFORMANCE

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

3.1. GENERAL INFORMATION

The performance of the aircraft and engine depends on the generation of forces by the interaction between the aircraft or engine and the air mass through which it flies. The atmosphere has a pronounced effect on the temperature, pressure and density of the air.

The ICAO establishes standards to estimate and compare the aircraft and engine performance. Some ICAO standards are shown below:

1. Sea level standard day:
Standard Temperature $T_o = 15\text{ }^{\circ}\text{C}$ (288.15 K)
Standard Pressure $P_o = 101.3\text{ kPa}$ (29.92 inHg)
Standard Density $\rho_o = 0.002377\text{ slug per cubic feet}$
2. ISA

Table 3.1 - ISA

ALTITUDE		TEMPERATURE	
m	ft	$^{\circ}\text{C}$	$^{\circ}\text{F}$
0	0	15.0	59.0
305	1000	13.0	55.4
610	2000	11.0	51.9
915	3000	9.1	48.3
1220	4000	7.1	44.7
1524	5000	5.1	41.2
3049	10000	-4.8	23.3
4573	15000	-14.7	5.5
6098	20000	-24.6	-12.3
7622	25000	-34.5	-30.2
9146	30000	-44.4	-48.0
11003	36089	-56.5	-69.7
12195	40000	-56.5	-69.7

NOTE: The performance data shown in this section must not be used for operations.

NOTE: For further information about performance, refer to AOM and AFM.

Tire speed limits are not applicable to this specific aircraft.

This section provides the following information:

- The payload x range charts.
- The takeoff field length charts.
- The landing field length charts.



NOTE: For other charts containing payload x ranges, takeoff field lengths and/or landing field lengths with conditions different from those presented in this section, contact Embraer to get these charts.

3.2. **PAYLOAD X RANGE**


The Payload x Range charts are based on the following conditions:

- PW1919G and PW1922G engine models;
- Aircraft carrying passengers with 100 kg (220 lb) each;
- Flight level 350, that represents the cruising altitude equal to 10668 m (35000 ft);
- Atmosphere according to ISA or ISA + 10 °C conditions;
- MTOW.

EFFECTIVITY: EMBRAER 190-E2 ACFT

Payload x Range - ISA Conditions

Figure 3.1

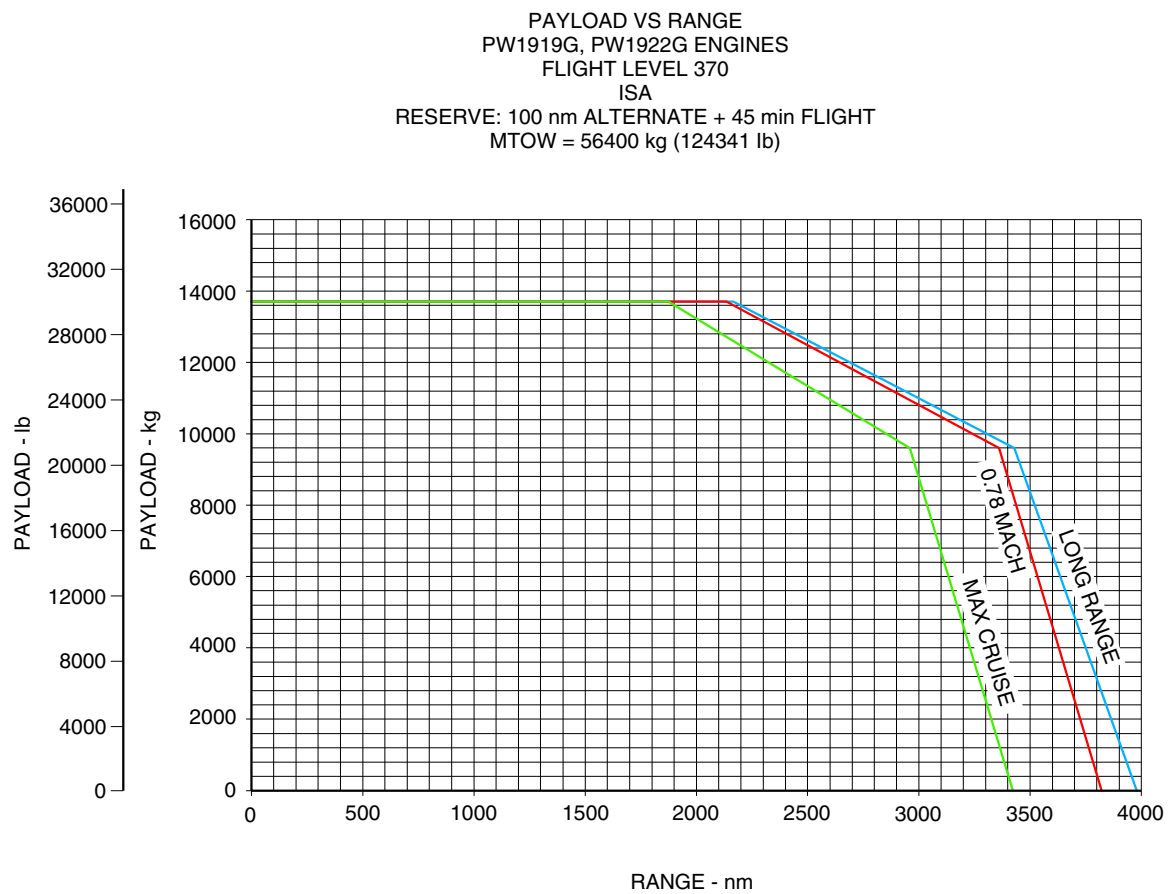

NOTES:


MAX TAKEOFF WEIGHT ----- 56400 kg (124341 lb)

MAX ZERO FUEL WEIGHT----- 46700 kg (102956 lb)

MAX USABLE FUEL----- 13500 kg (29760 lb)

EM170E2APM030001C.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT
Payload x Range - ISA + 10 °C Conditions
Figure 3.2

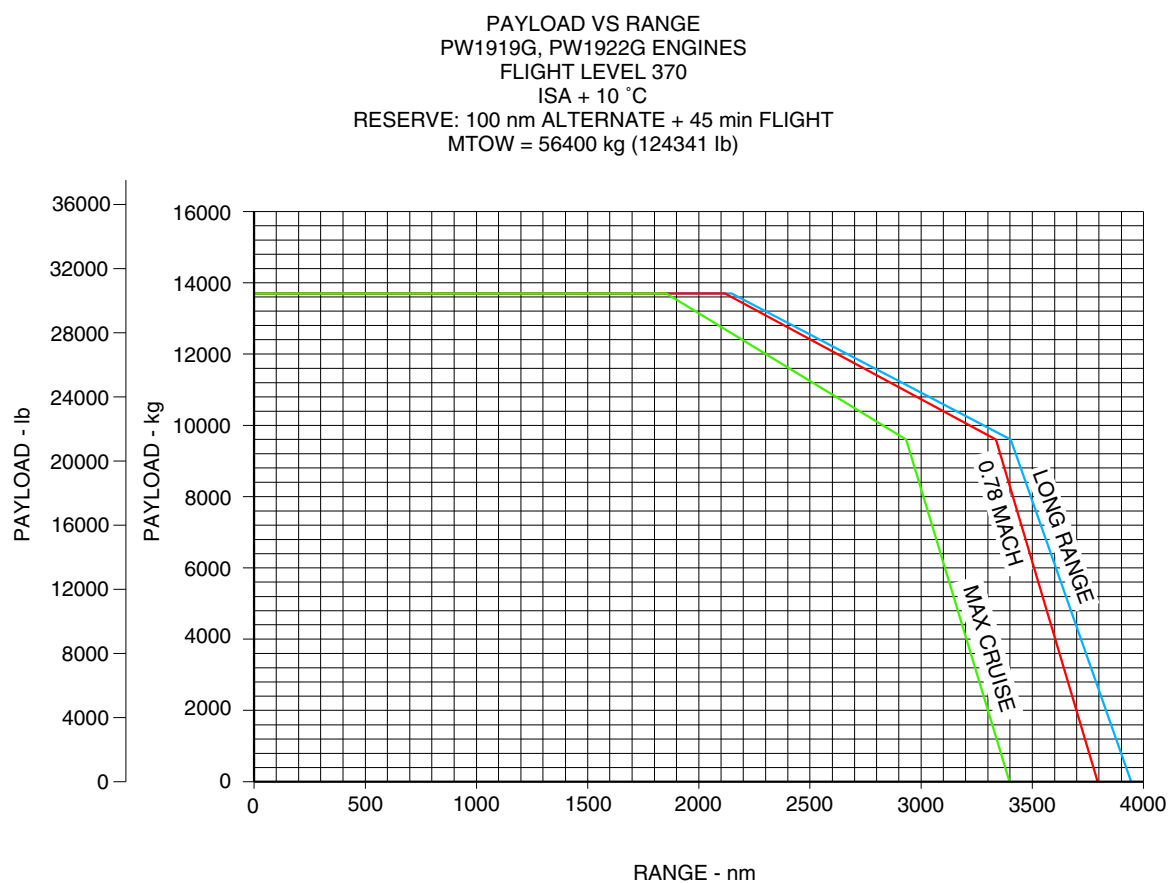

NOTES:


MAX TAKEOFF WEIGHT ----- 56400 kg (124341 lb)
MAX ZERO FUEL WEIGHT----- 46700 kg (102956 lb)
MAX USABLE FUEL----- 13500 kg (29760 lb)

EM170E2APM030002B.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT


Payload x Range - ISA Conditions

Figure 3.3

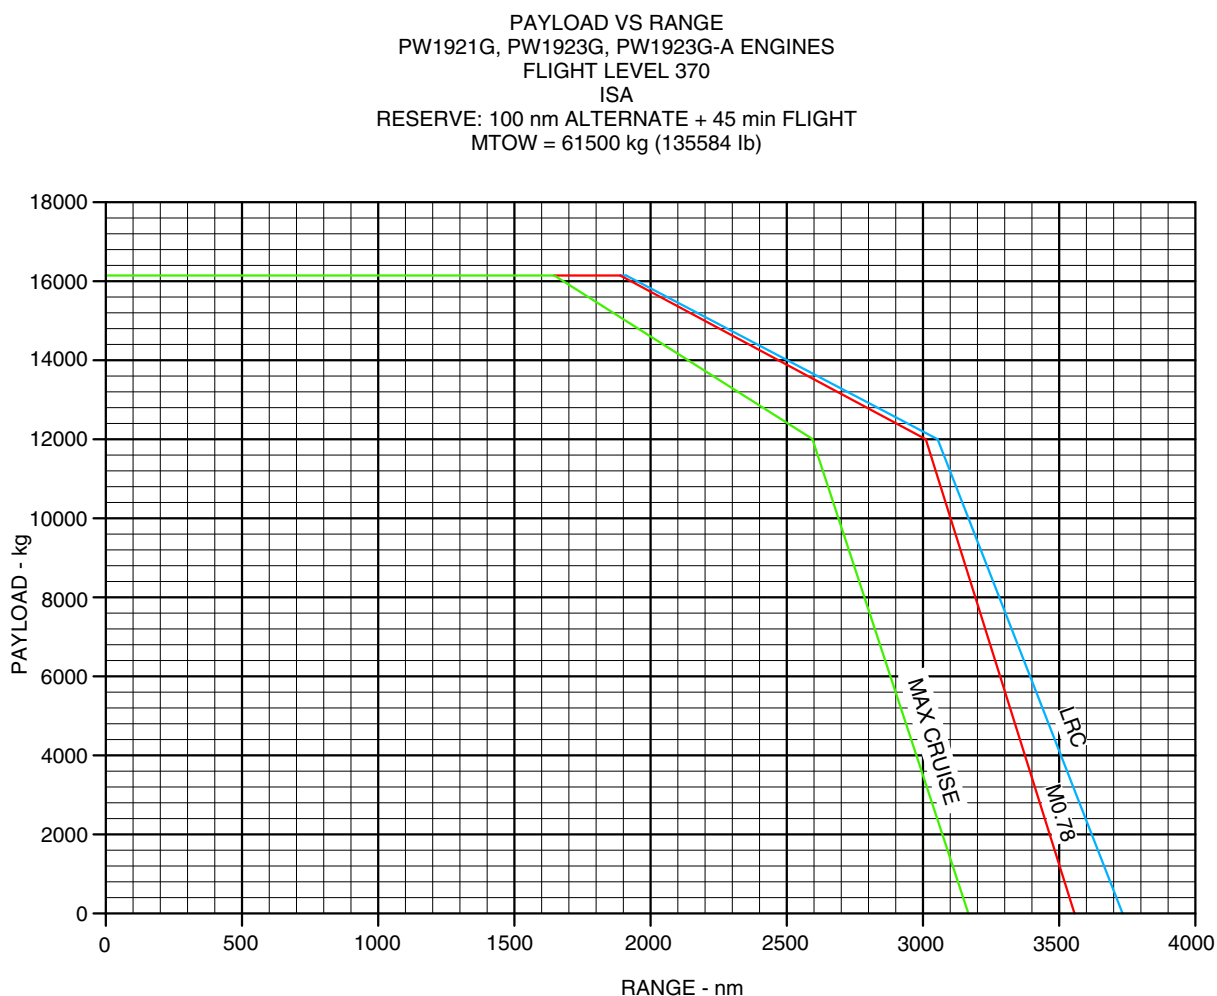

EM170E2APM030025A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
Payload x Range - ISA + 10 °C Conditions
Figure 3.4

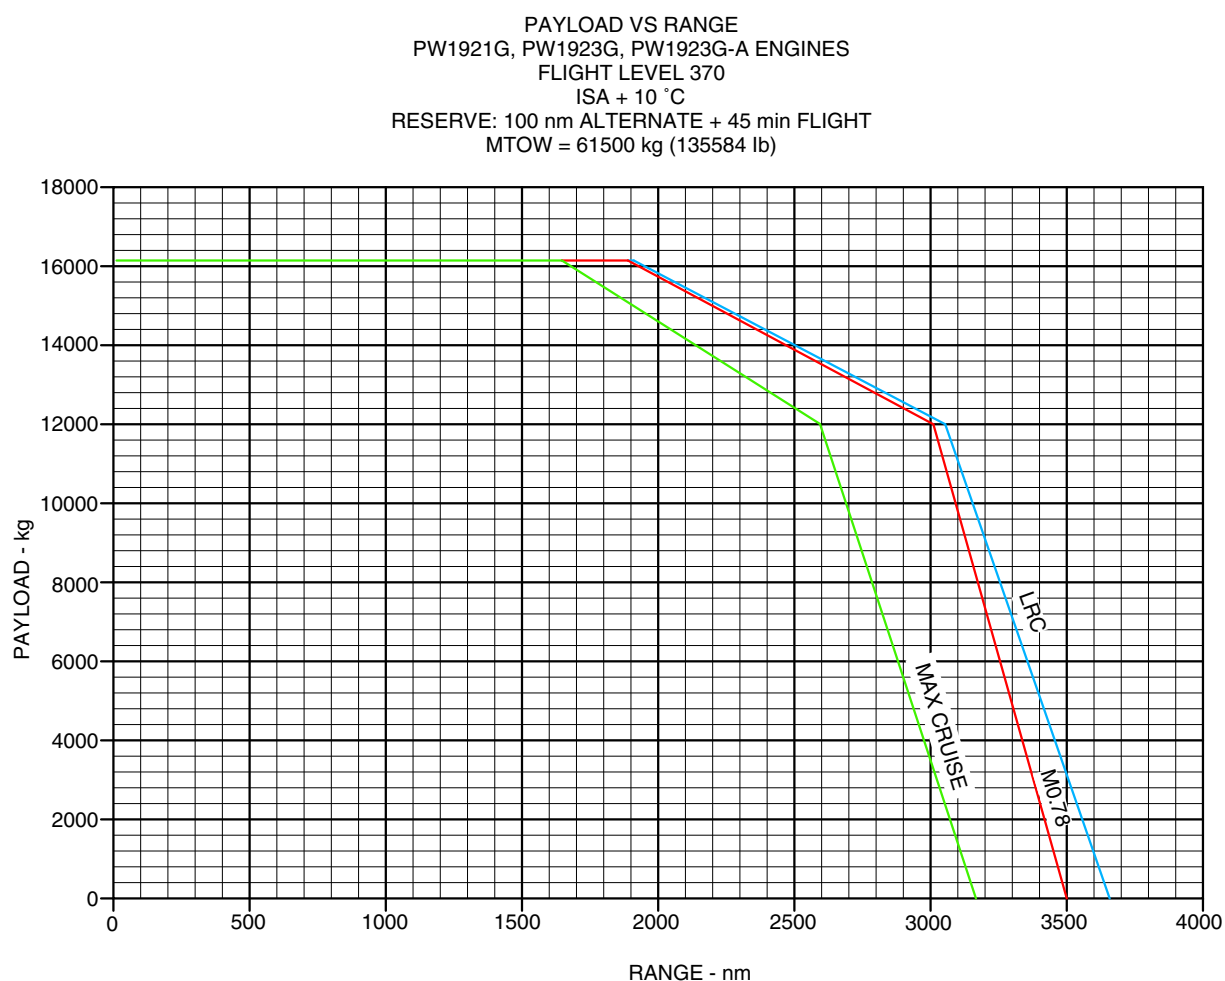

EM170E2APM030026A.IDR

3.3. **TAKEOFF FIELD LENGTHS**

The takeoff field lengths charts provide data about the maximum takeoff weights for compliance with the operating regulations related to takeoff field lengths.

Data are presented according to the following associated conditions:


- PW1919G and PW1922G engine models;
- Takeoff Mode: 1;
- ATTCS MTBF positioning: ON and OFF;
- Flaps setting position: 1, 2 and 4;
- Pavement conditions: dry, hard paved and level runway surface with no obstacles;
- Zero wind and atmosphere according to ISA or ISA + 10 °C conditions;
- Pack OFF: No engine bleed extraction for air conditioning packs was considered in the takeoff and landing charts.



EFFECTIVITY: EMBRAER 190-E2 ACFT


Takeoff Field Lengths - ISA Conditions

Figure 3.5

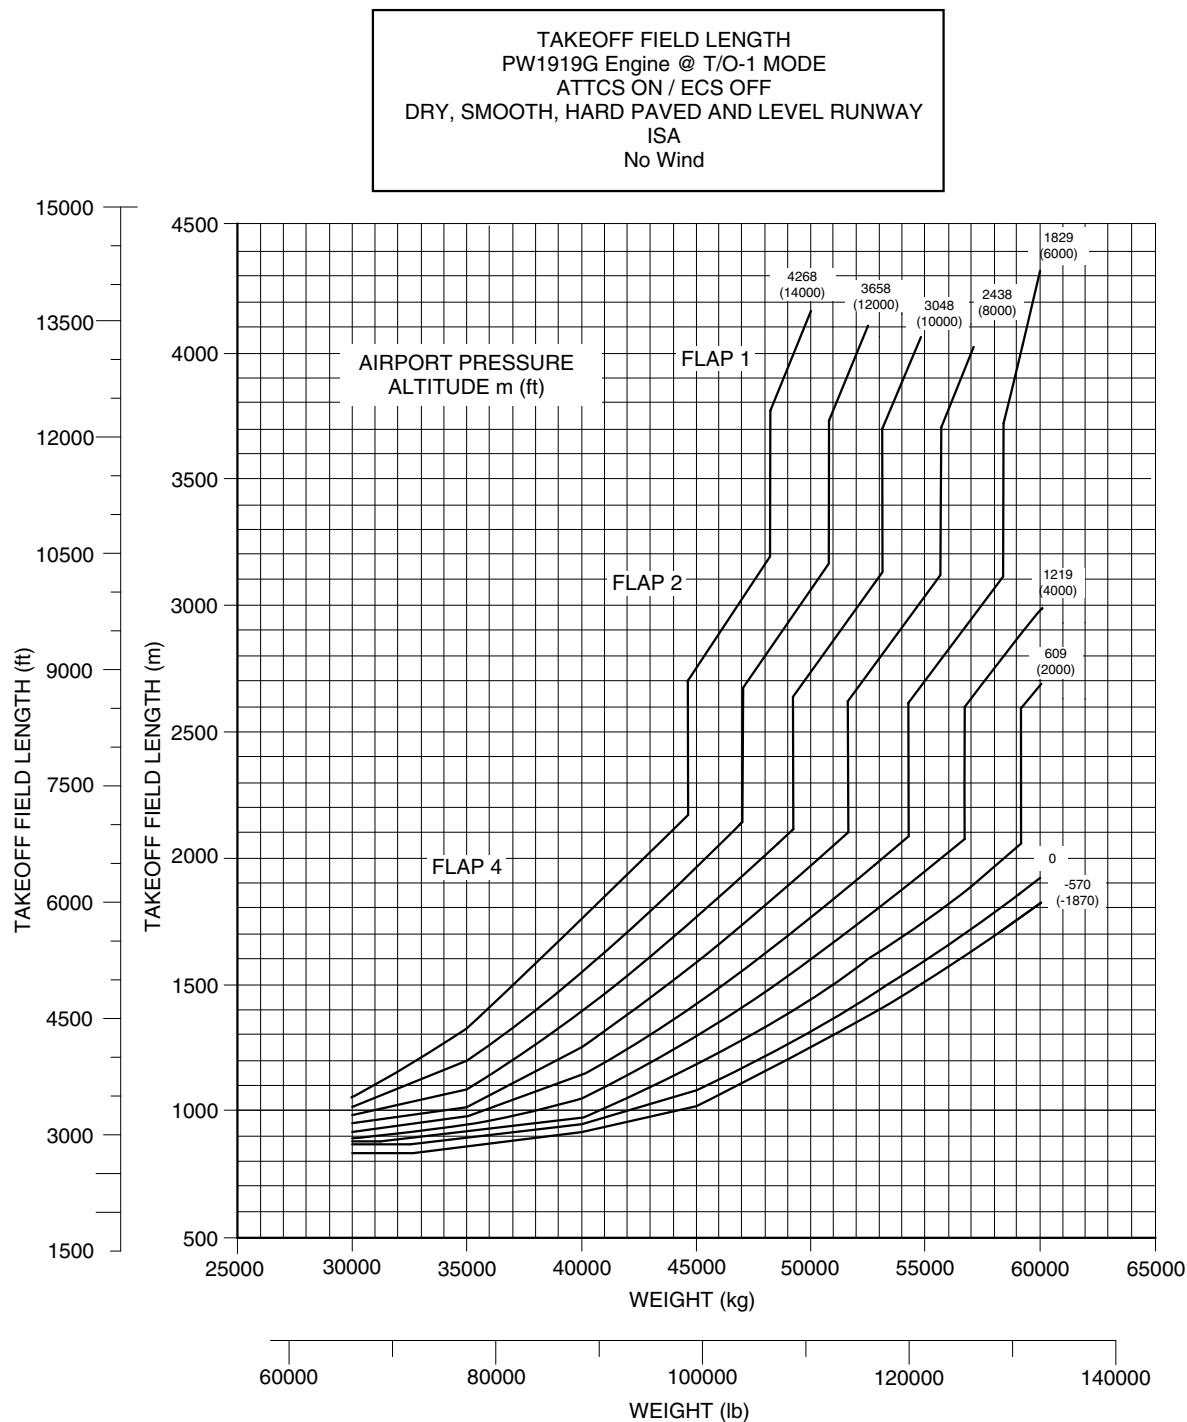

EM170E2APM030003A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT
Takeoff Field Lengths - ISA + 15 °C Conditions
Figure 3.6

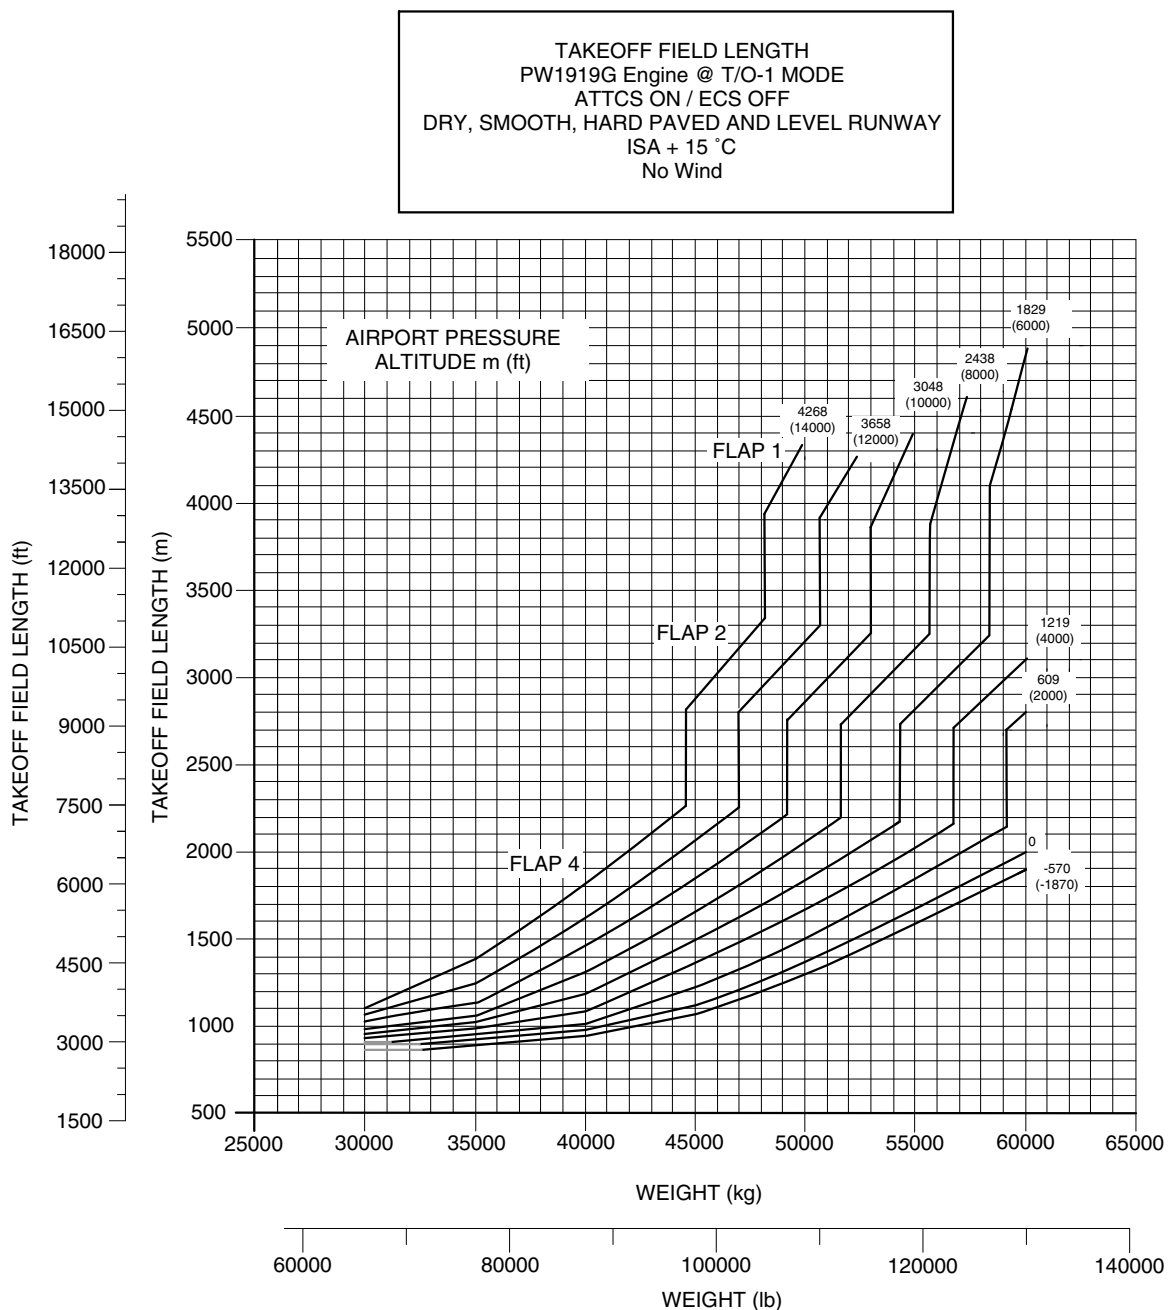


EM170E2APM030004A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT

Takeoff Field Lengths - ISA + 20 °C Conditions


Figure 3.7

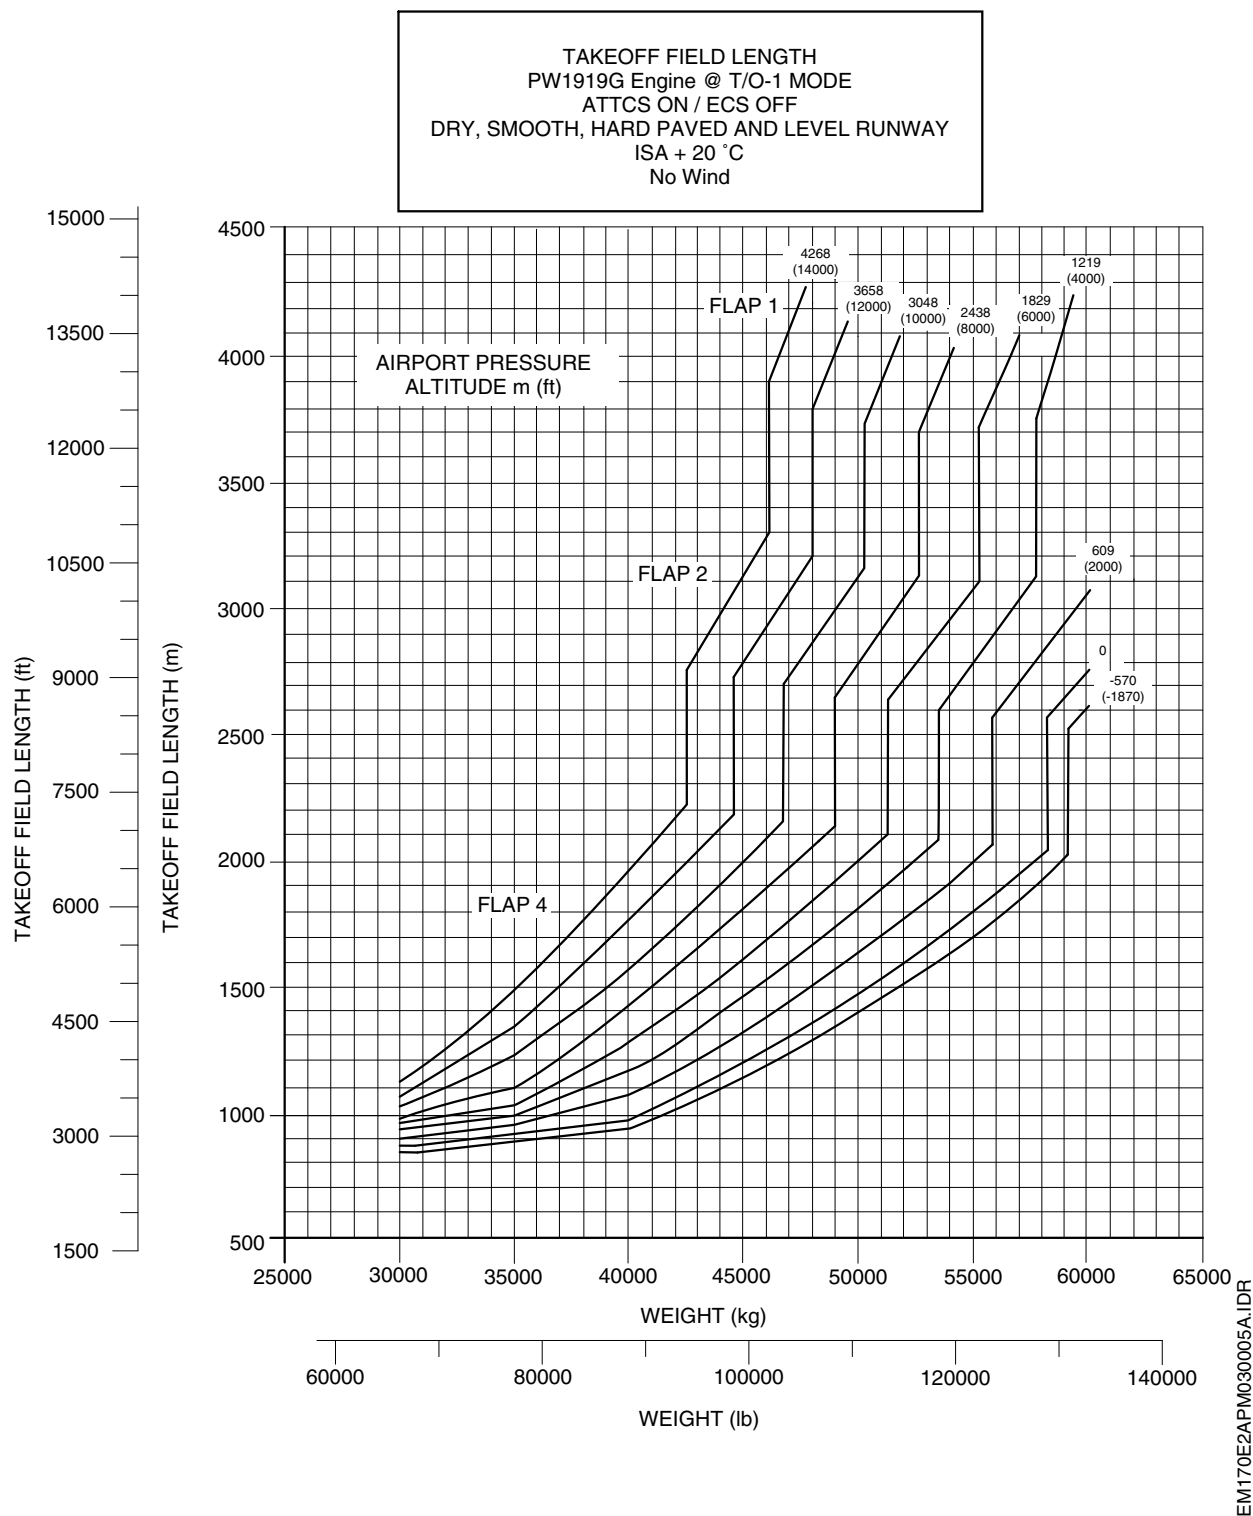

EFFECTIVITY: EMBRAER 190-E2 ACFT

Takeoff Field Lengths - ISA Conditions

Figure 3.8

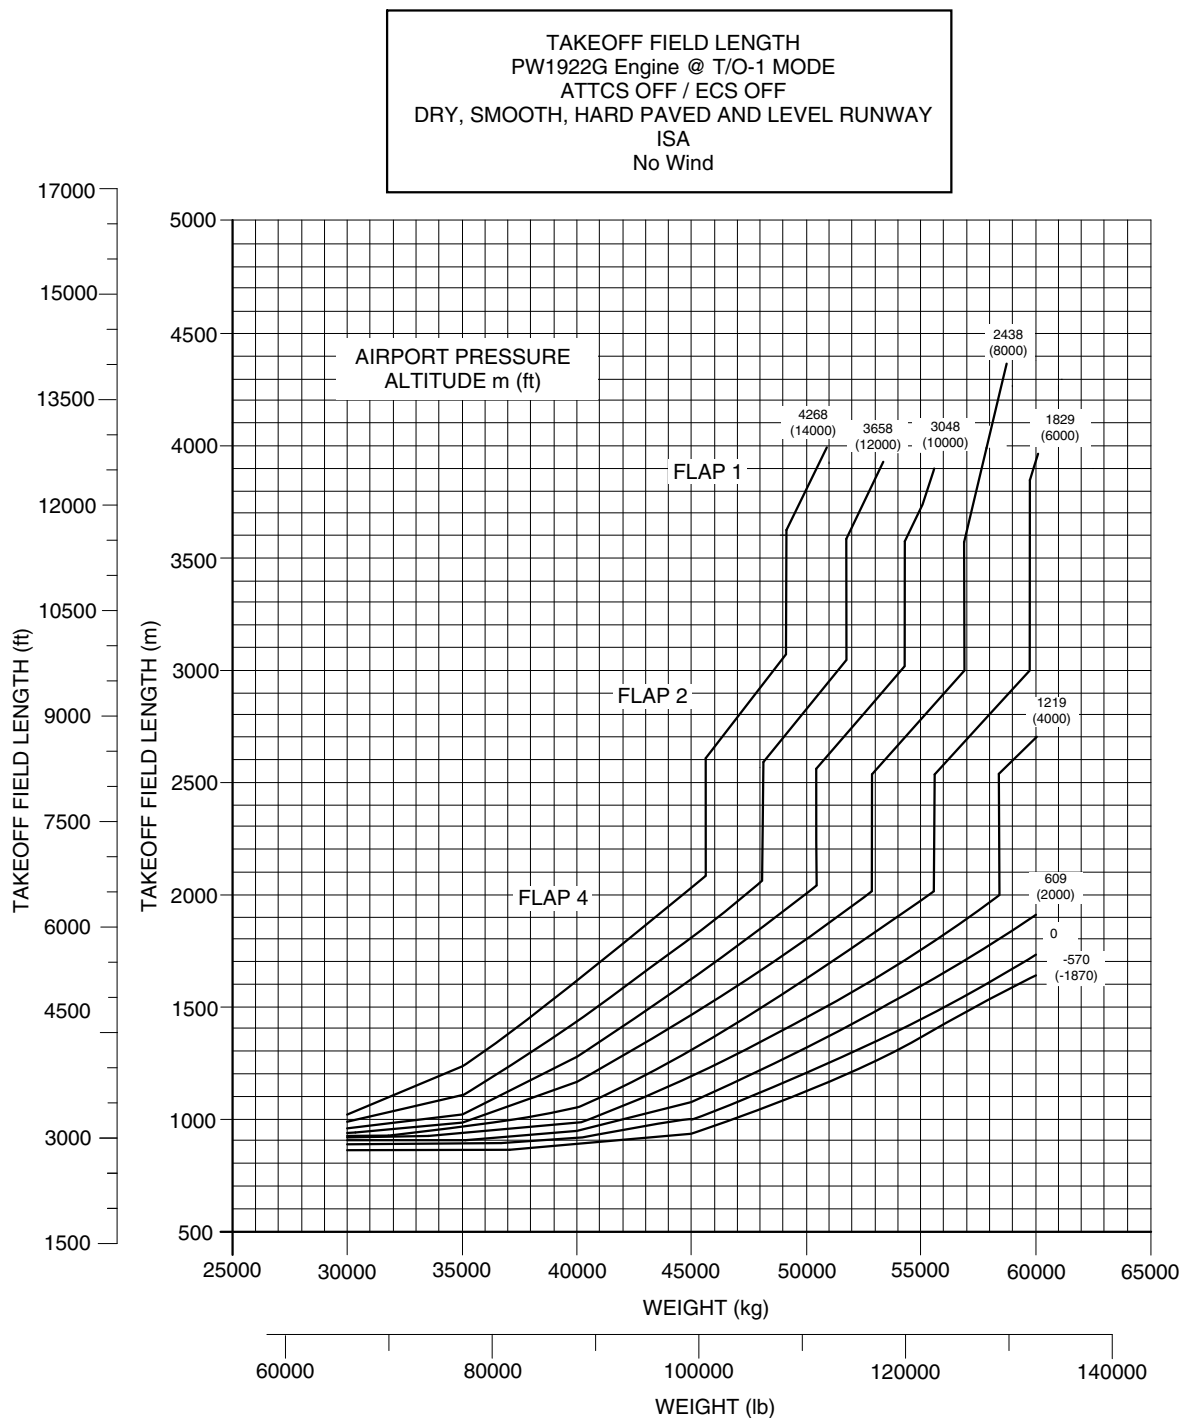


EM170E2APM030006A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT


Takeoff Field Lengths - ISA + 15 °C Conditions

Figure 3.9

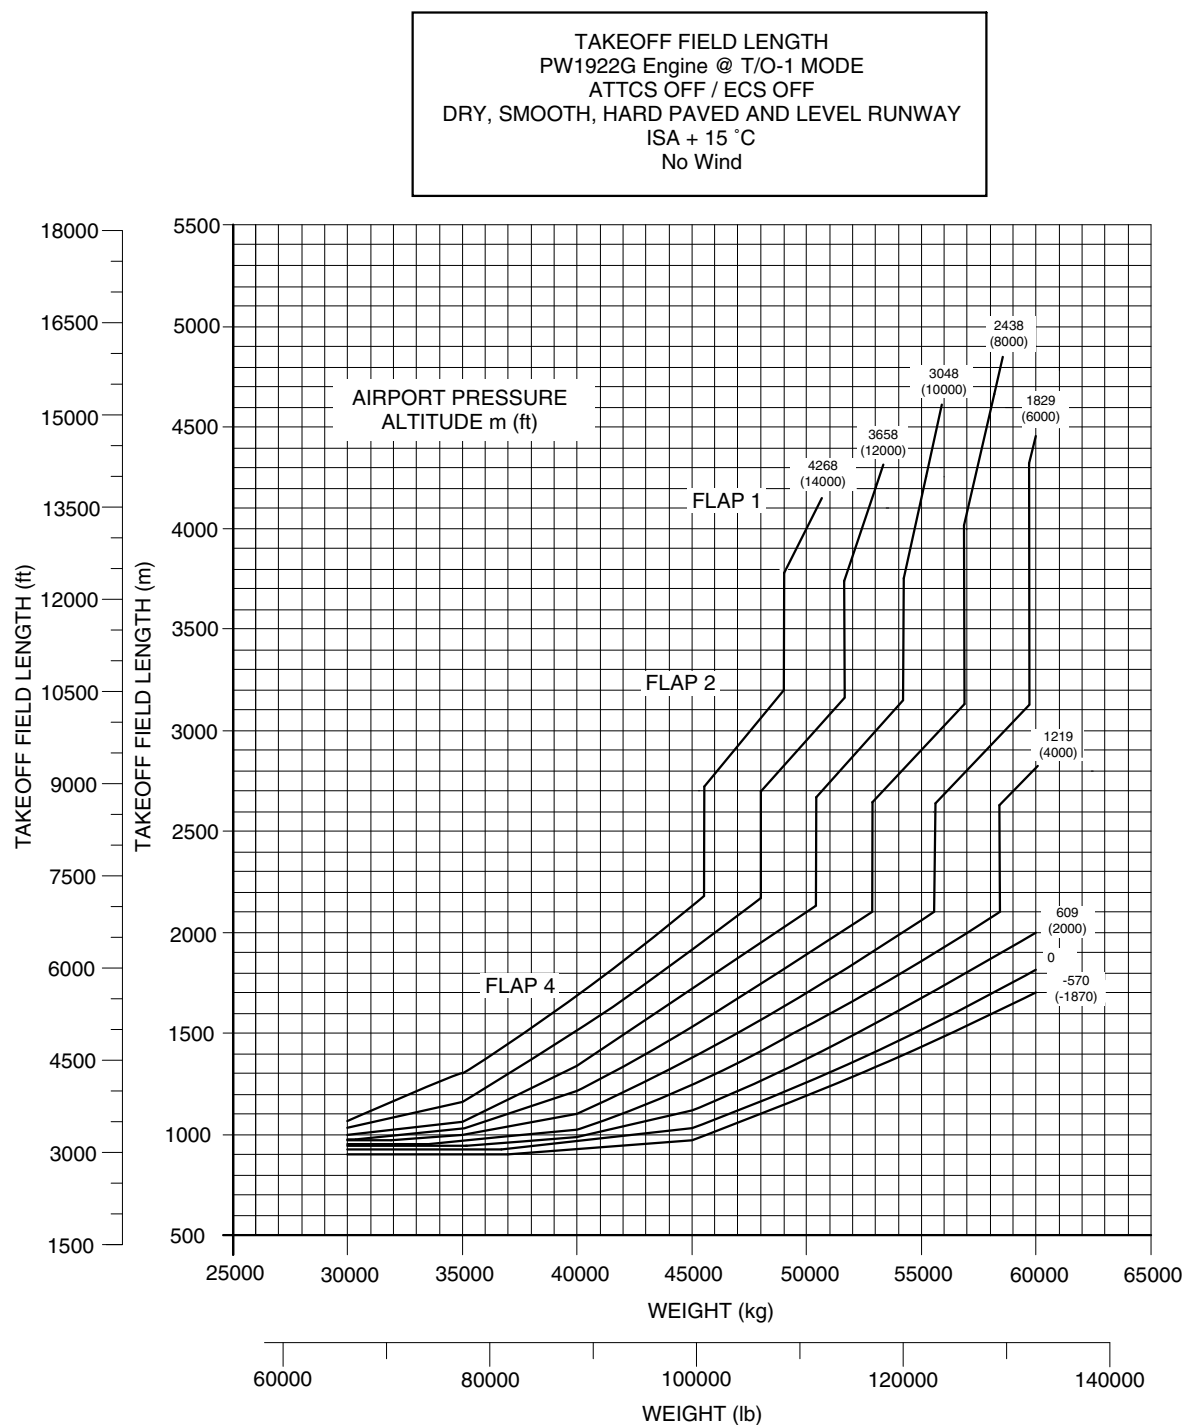

EM170E2APM030007A.IDR


EFFECTIVITY: EMBRAER 190-E2 ACFT
Takeoff Field Lengths - ISA + 20 °C Conditions
Figure 3.10

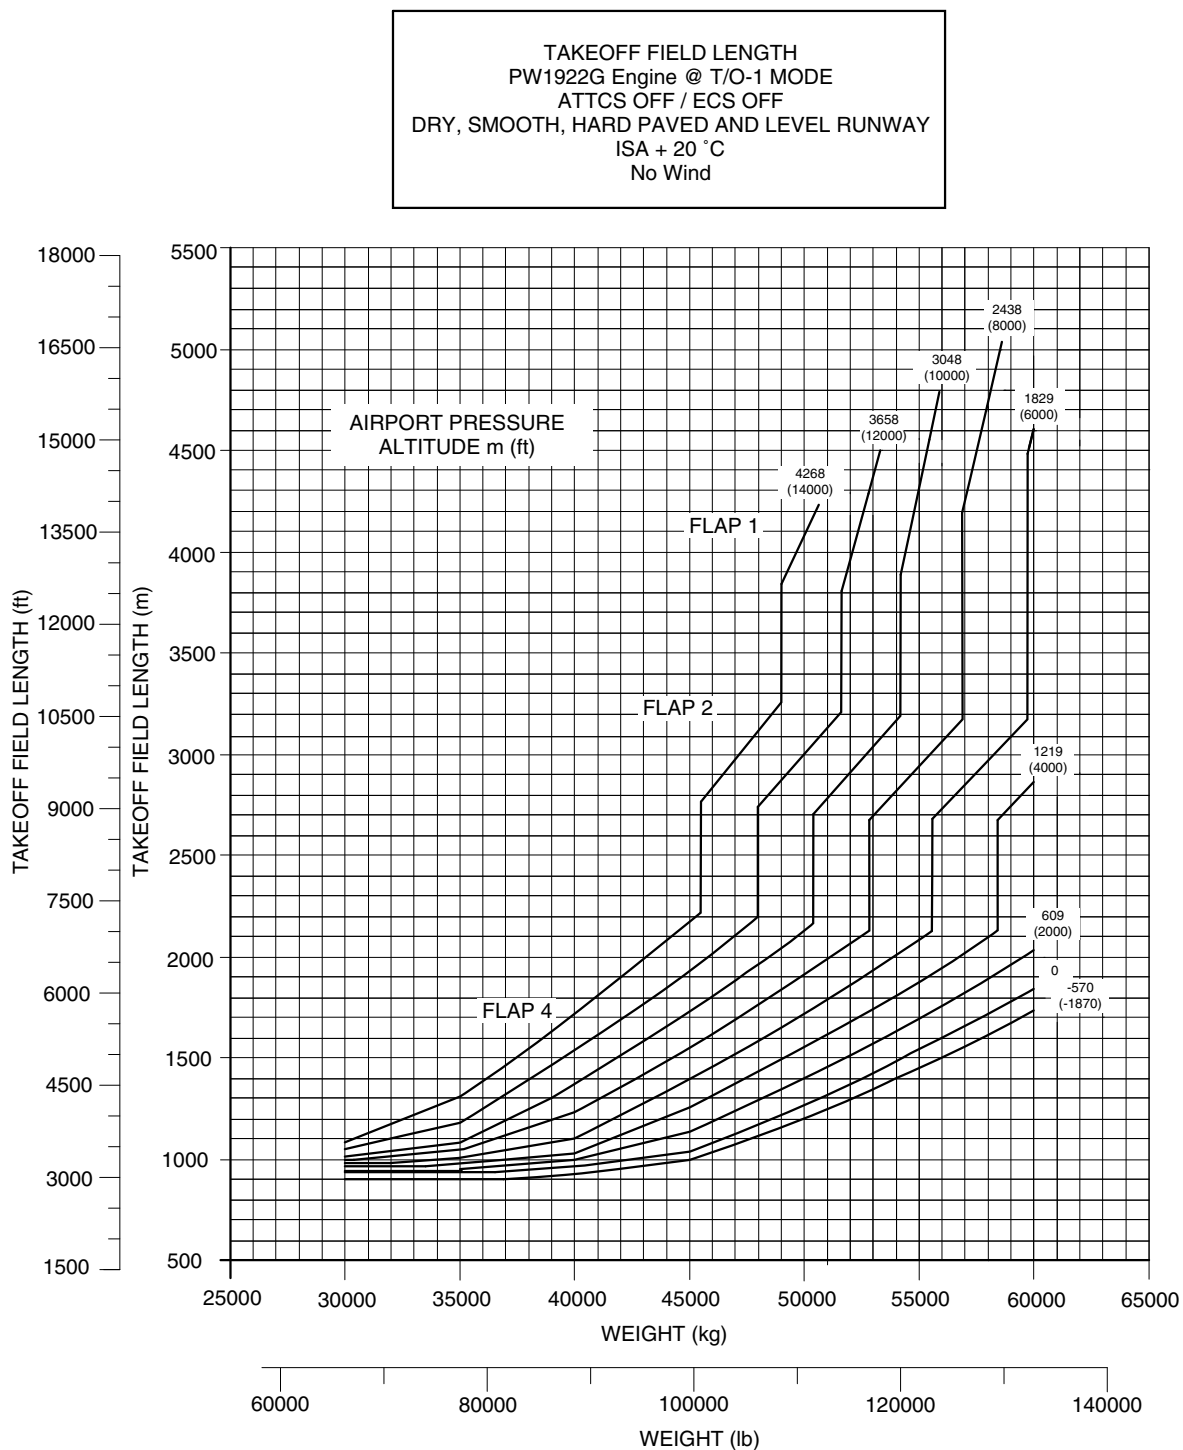

EM170E2APM030008A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
Takeoff Field Lengths - ISA Conditions
Figure 3.11


TAKEOFF FIELD LENGTH
PW1921G ENGINE @ T/O-1 MODE
ATTCS ON / ECS OFF
DRY, SMOOTH, HARD PAVED AND LEVEL RUNWAY
ISA 0
No Wind

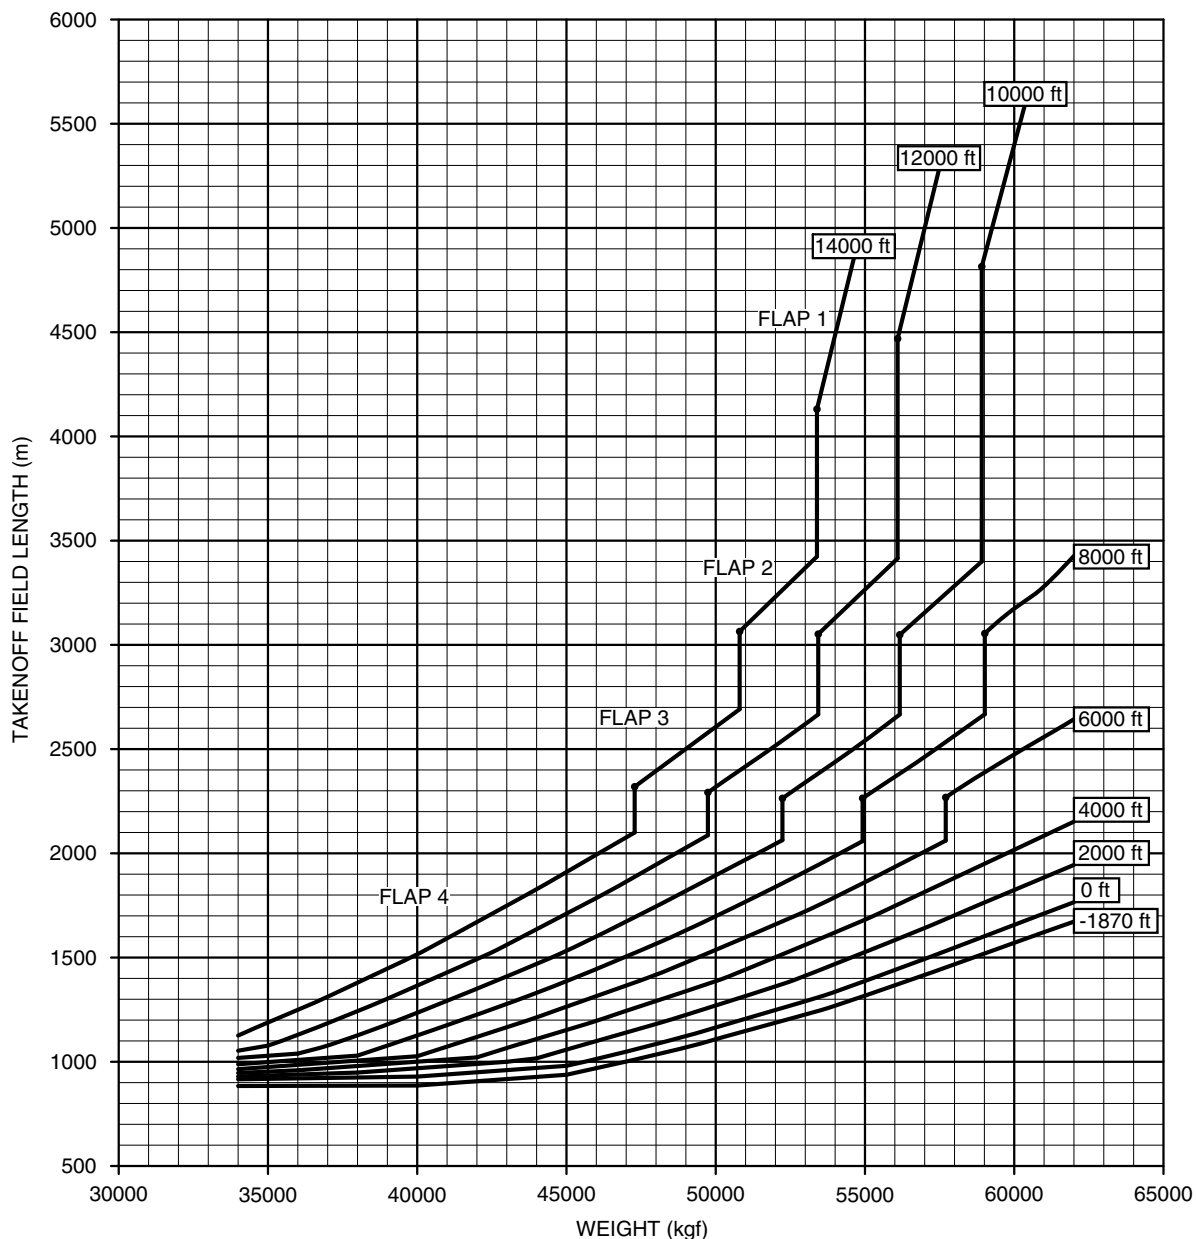

EM170E2APM030027A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
Takeoff Field Lengths - ISA + 15 °C Conditions
Figure 3.12


TAKEOFF FIELD LENGTH
PW1921G ENGINE @ T/O-1 MODE
ATTCS ON / ECS OFF
DRY, SMOOTH, HARD PAVED AND LEVEL RUNWAY
ISA 15
No Wind

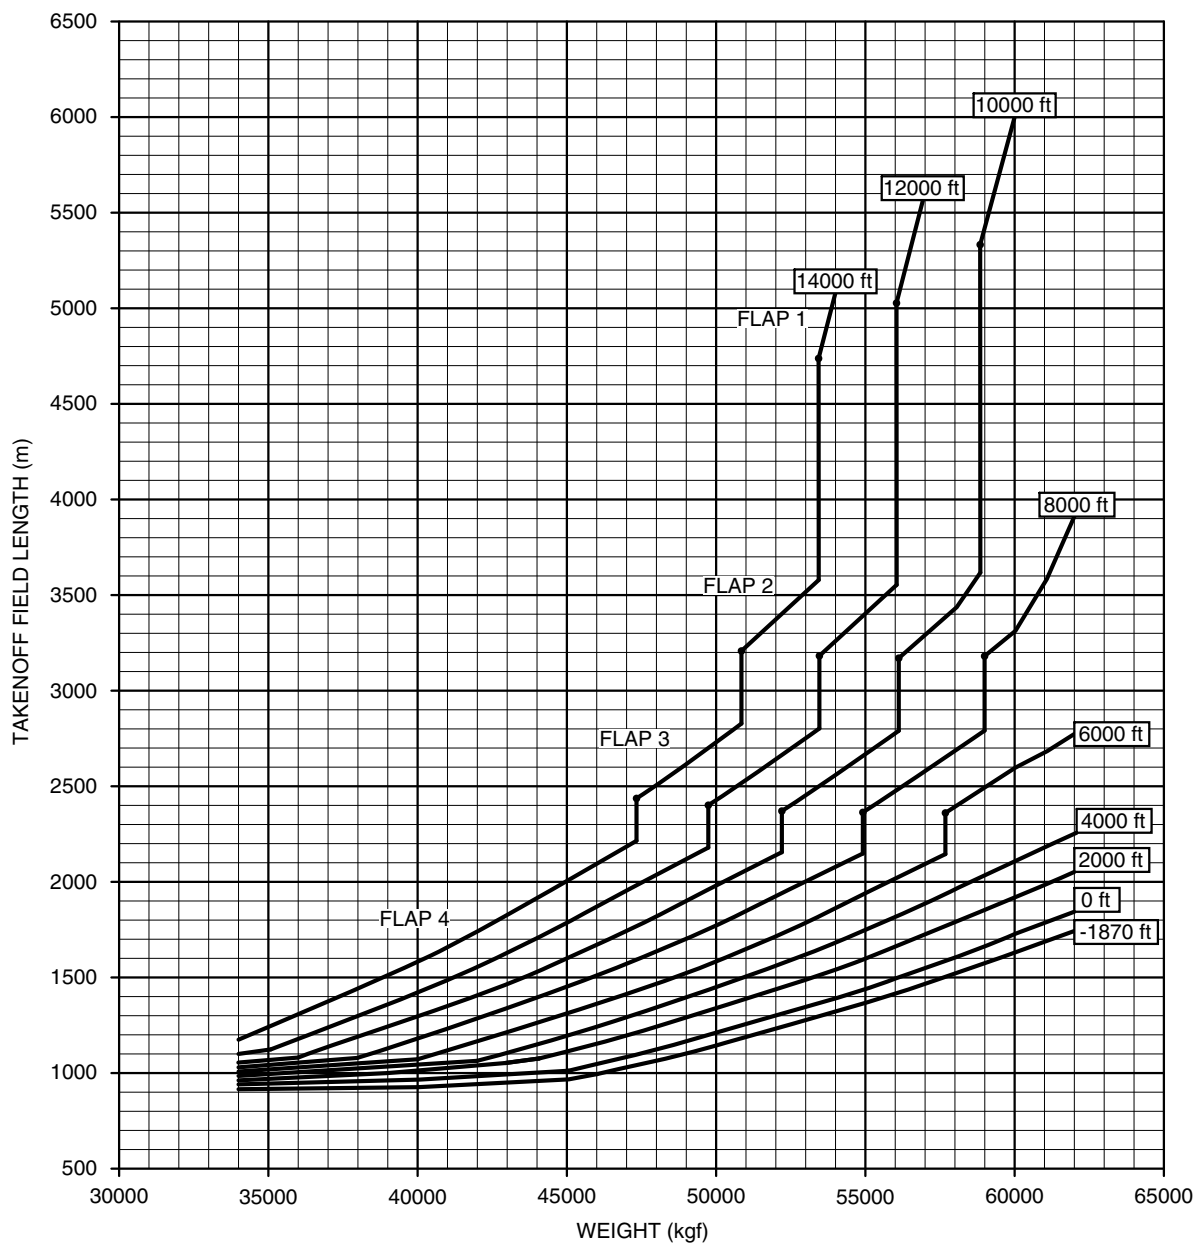

EM170E2APM030028A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
Takeoff Field Lengths - ISA Conditions
Figure 3.13


TAKEOFF FIELD LENGTH
PW1923G & PW1923GA ENGINES @ T/O-1 MODE
ATTCS ON / ECS OFF
DRY, SMOOTH, HARD PAVED AND LEVEL RUNWAY
ISA 0
NO WIND

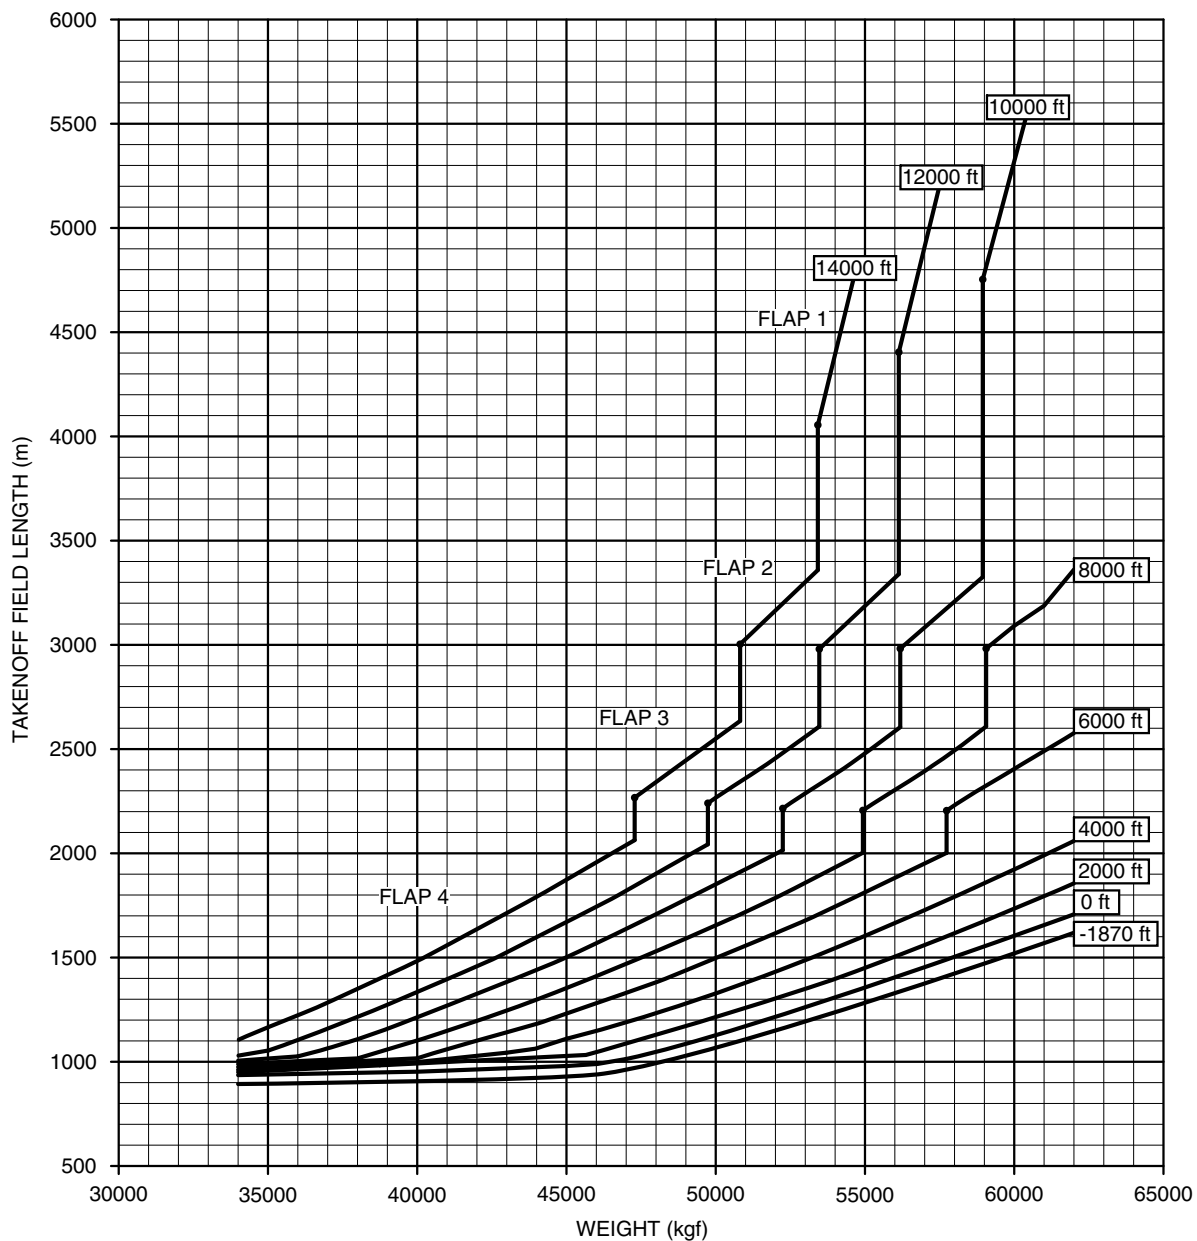

EM170E2APM030029A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
Takeoff Field Lengths - ISA + 15 °C Conditions
Figure 3.14

TAKEOFF FIELD LENGTH
PW1921G ENGINE @ T/O-1 MODE
ATTCS ON / ECS OFF
DRY, SMOOTH, HARD PAVED AND LEVEL RUNWAY
ISA 15
No Wind

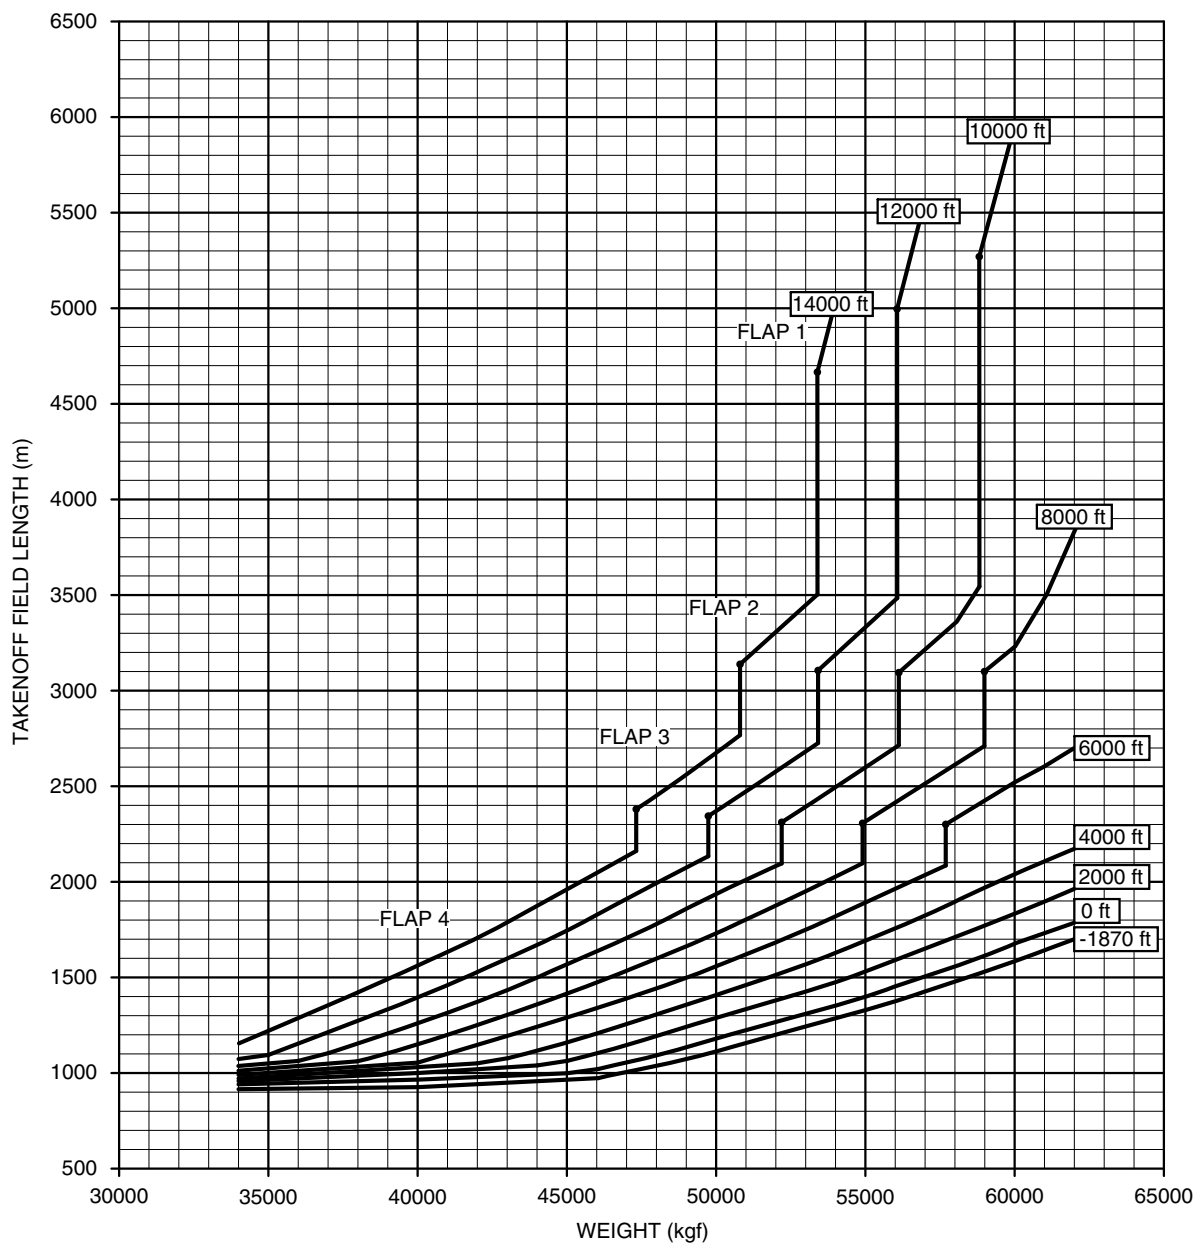

EM170E2APM030030A.IDR


3.4. LANDING FIELDS LENGTHS

The landing field lengths charts provide data about the maximum landing weights for compliance with the operating regulations related to landing field lengths.

Data is presented according to the following associated conditions:

- Landing gear: down;
- Flaps setting position: 5 or full;
- Pavement conditions: dry, hard paved and level runway surface with no obstacles;
- Zero wind and atmosphere according to ISA conditions;
- Pack OFF: No engine bleed extraction for air conditioning packs was considered in the takeoff and landing charts.

EFFECTIVITY: EMBRAER 190-E2 ACFT
Landing Field Lengths - Flap 5 - ISA Conditions
Figure 3.15

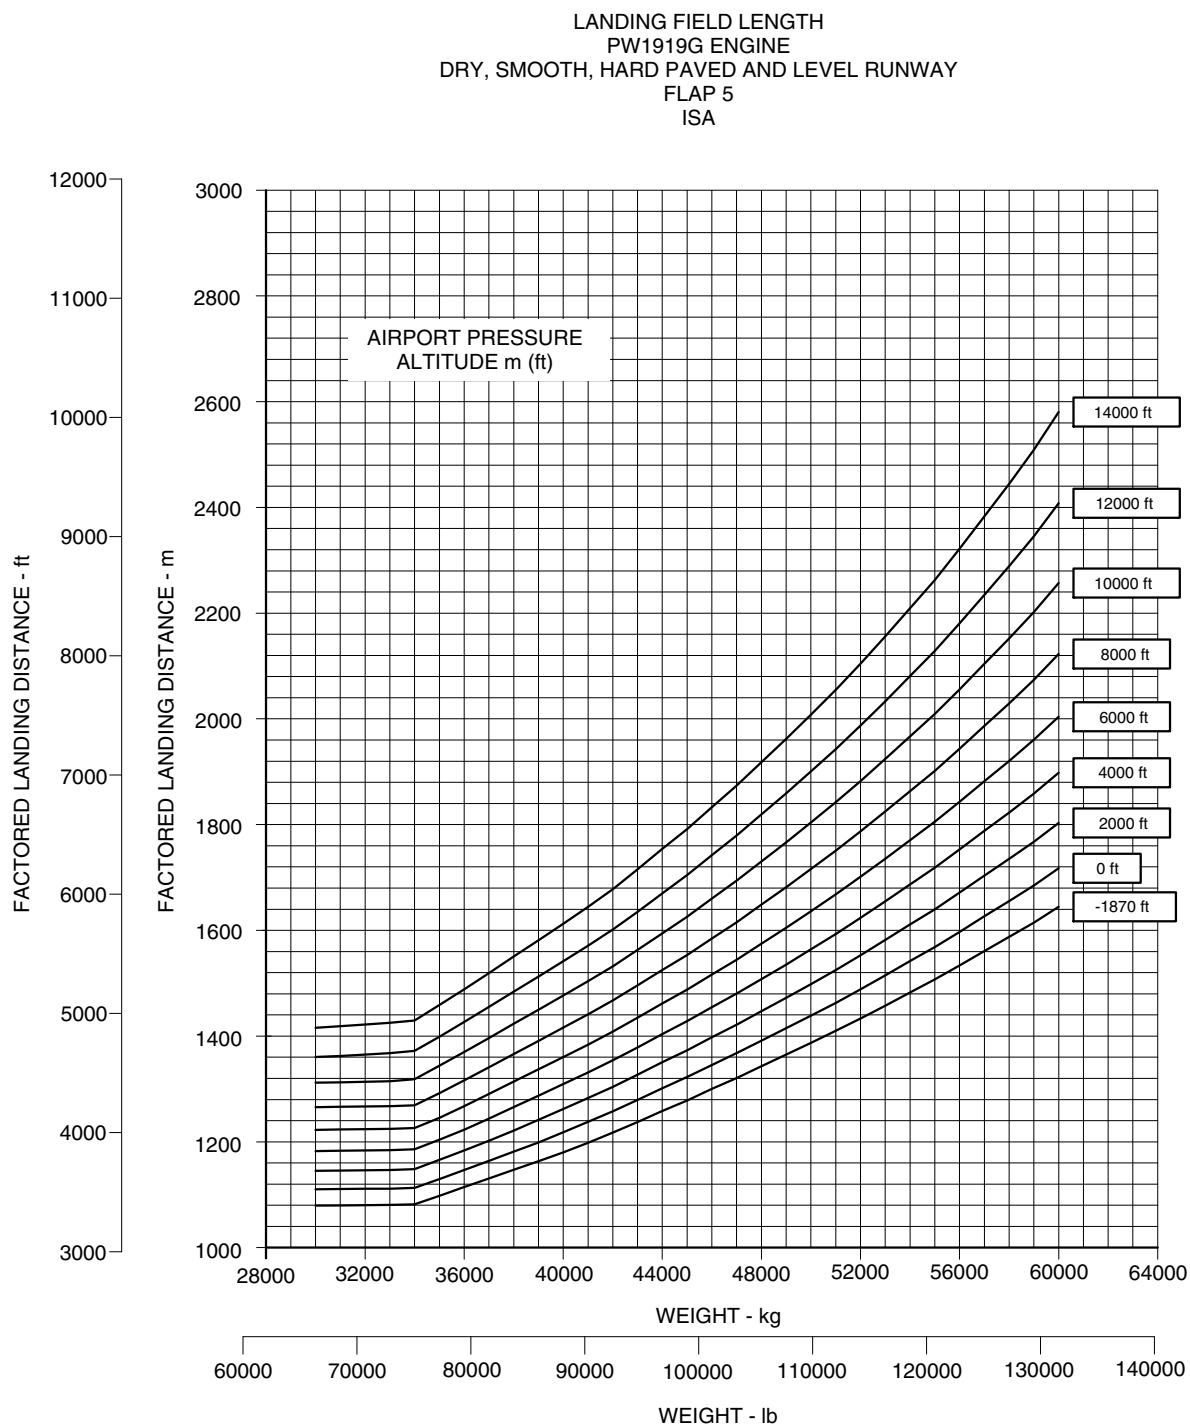


EM170E2APM030009A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT


Landing Field Lengths - Flap 5 - ISA + 15 °C Conditions

Figure 3.16

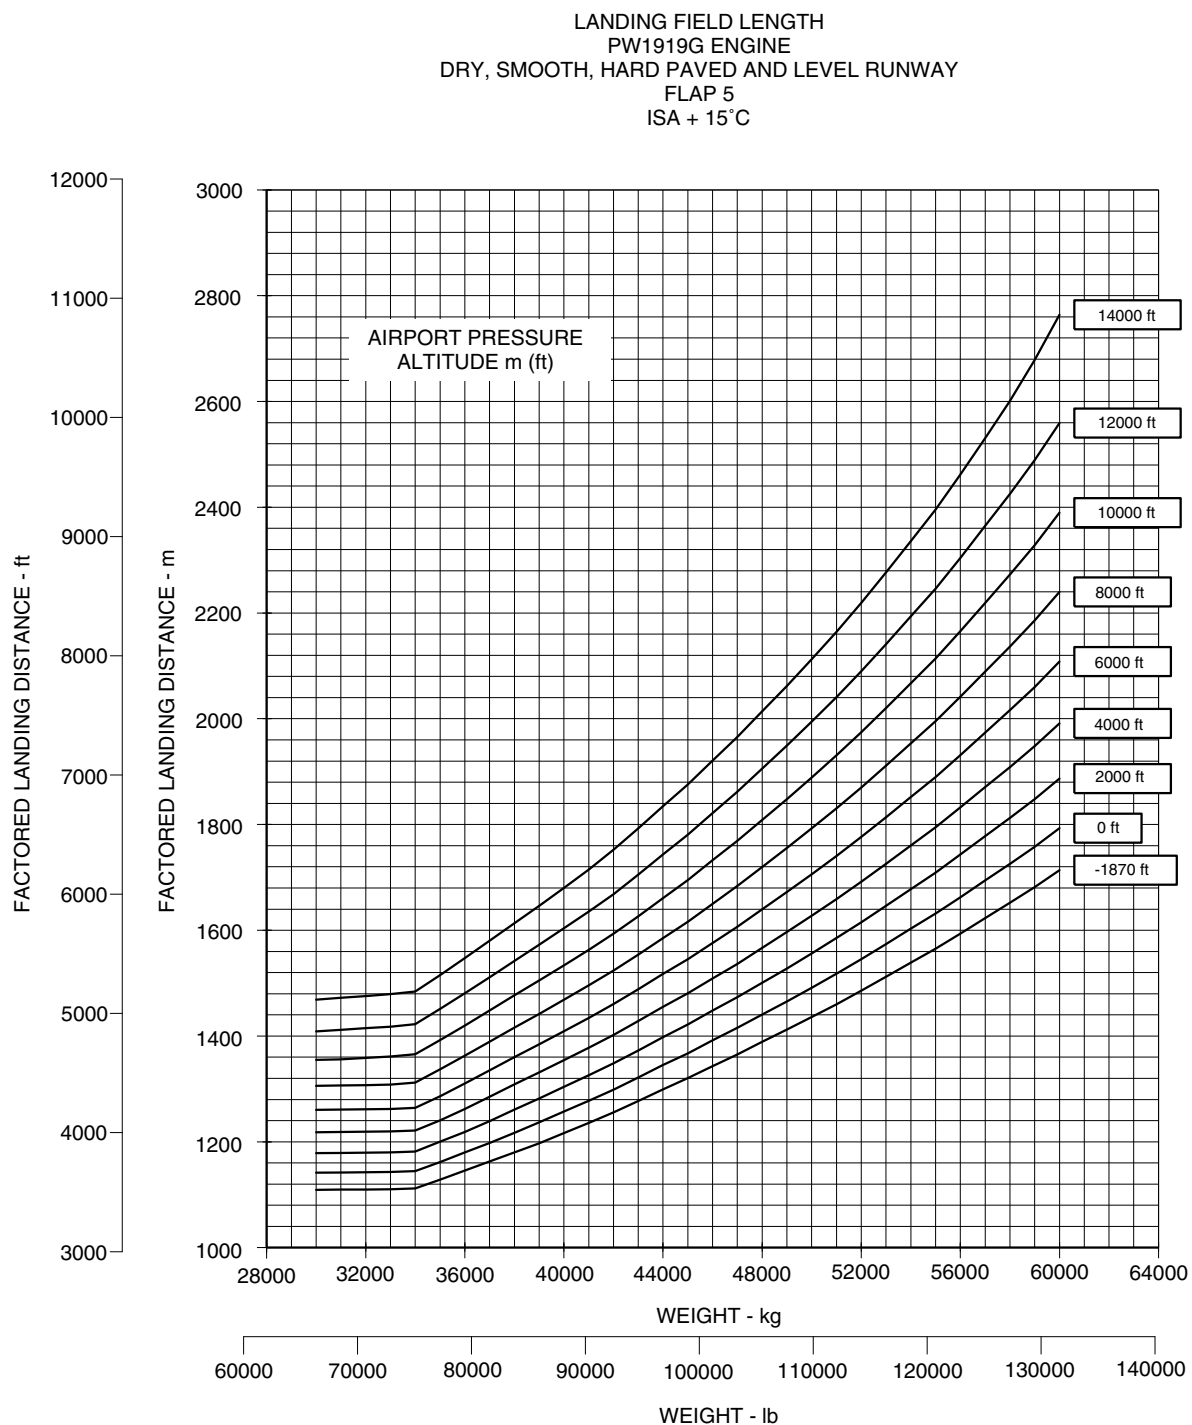

EM170E2APM030010A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT
Landing Field Lengths - Flap Full - ISA Conditions
Figure 3.17

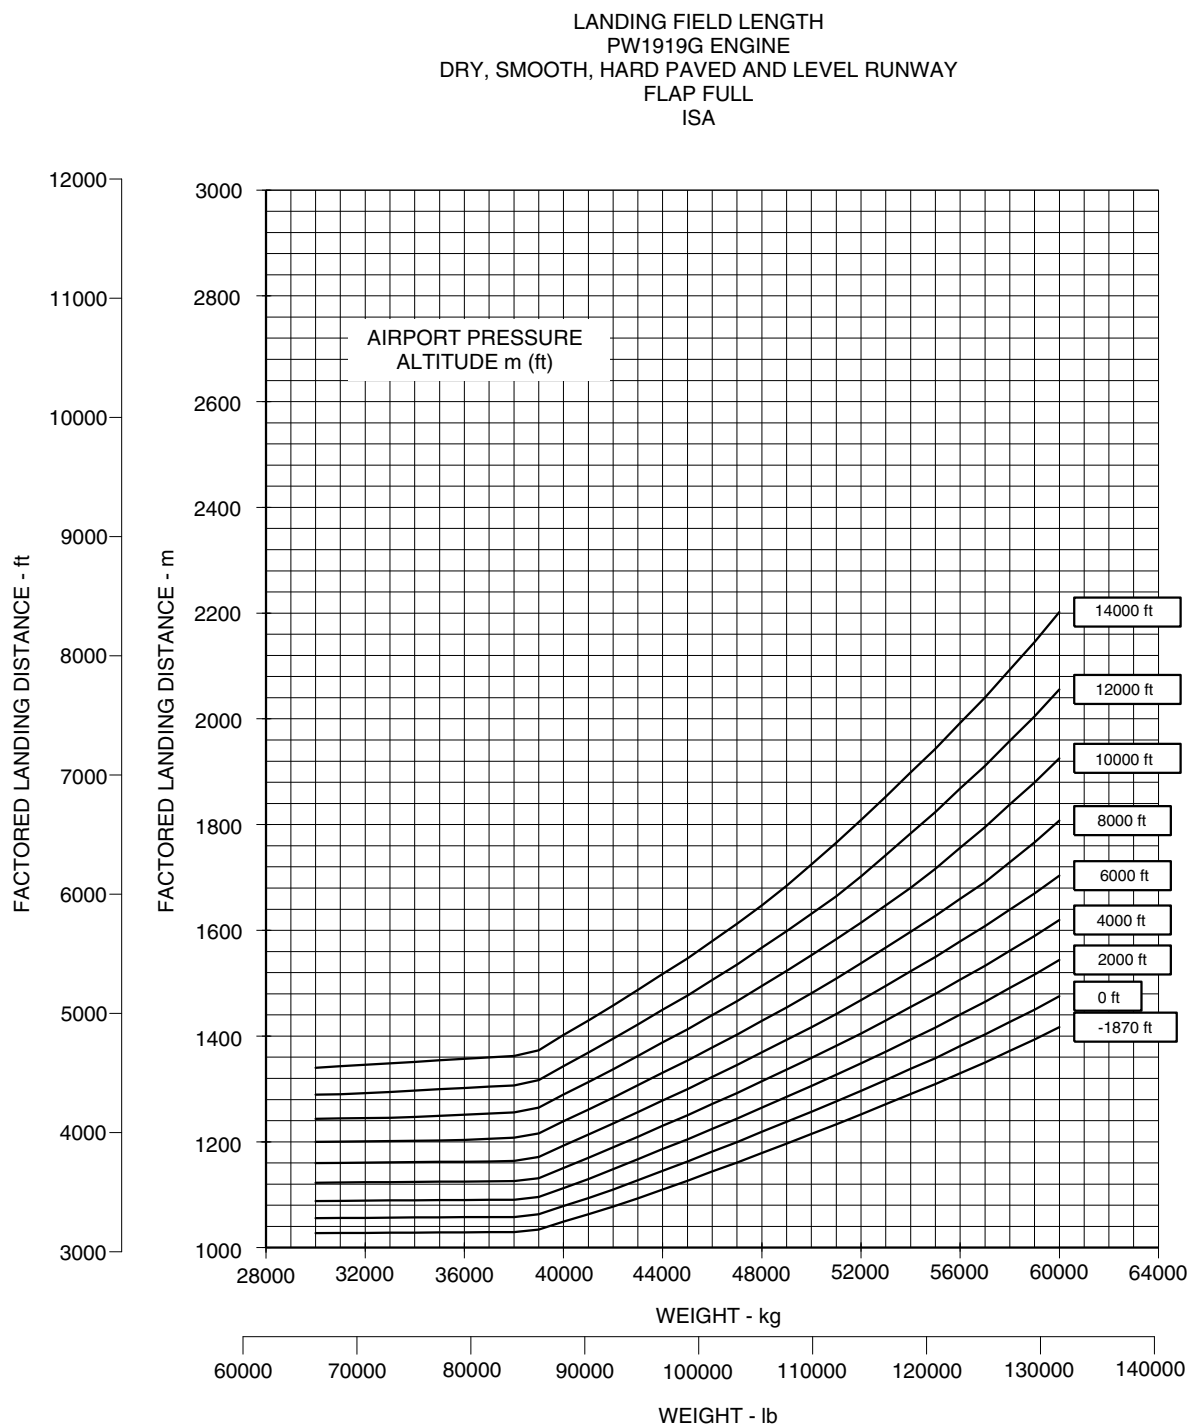


EM170E2APM030011A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT


Landing Field Lengths - Flap Full - ISA + 15 °C Conditions

Figure 3.18

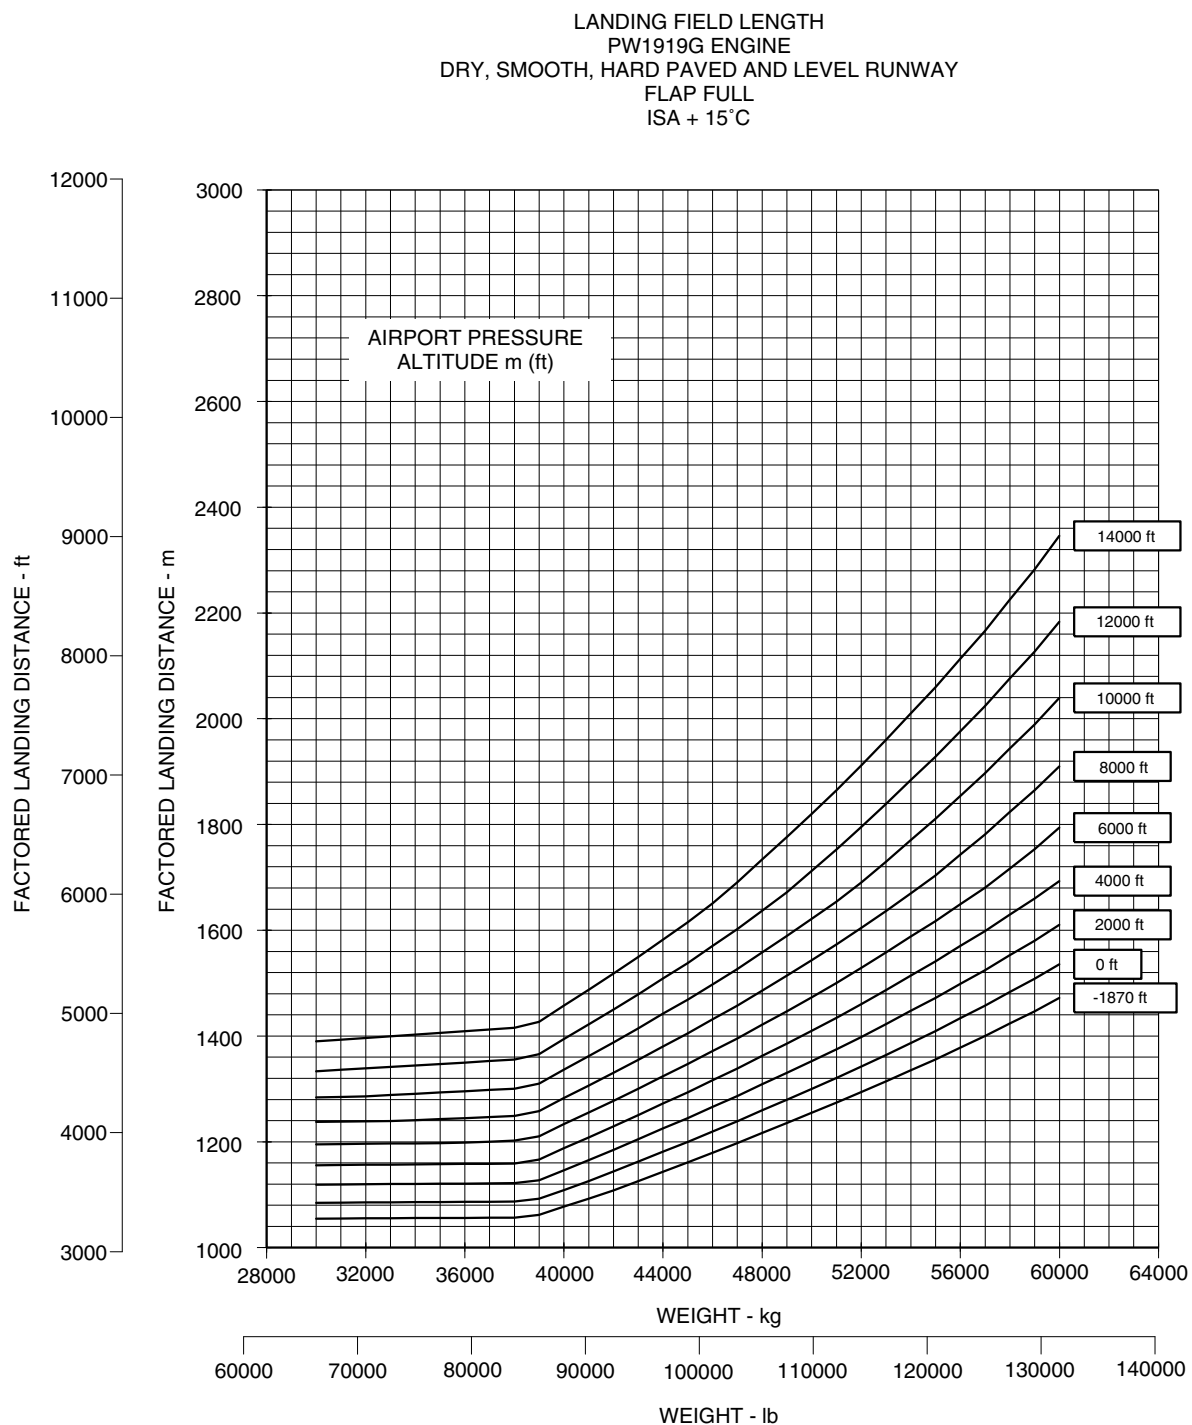

EM170E2APM030012A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT
Landing Field Lengths - Flap 5 - ISA Conditions
Figure 3.19

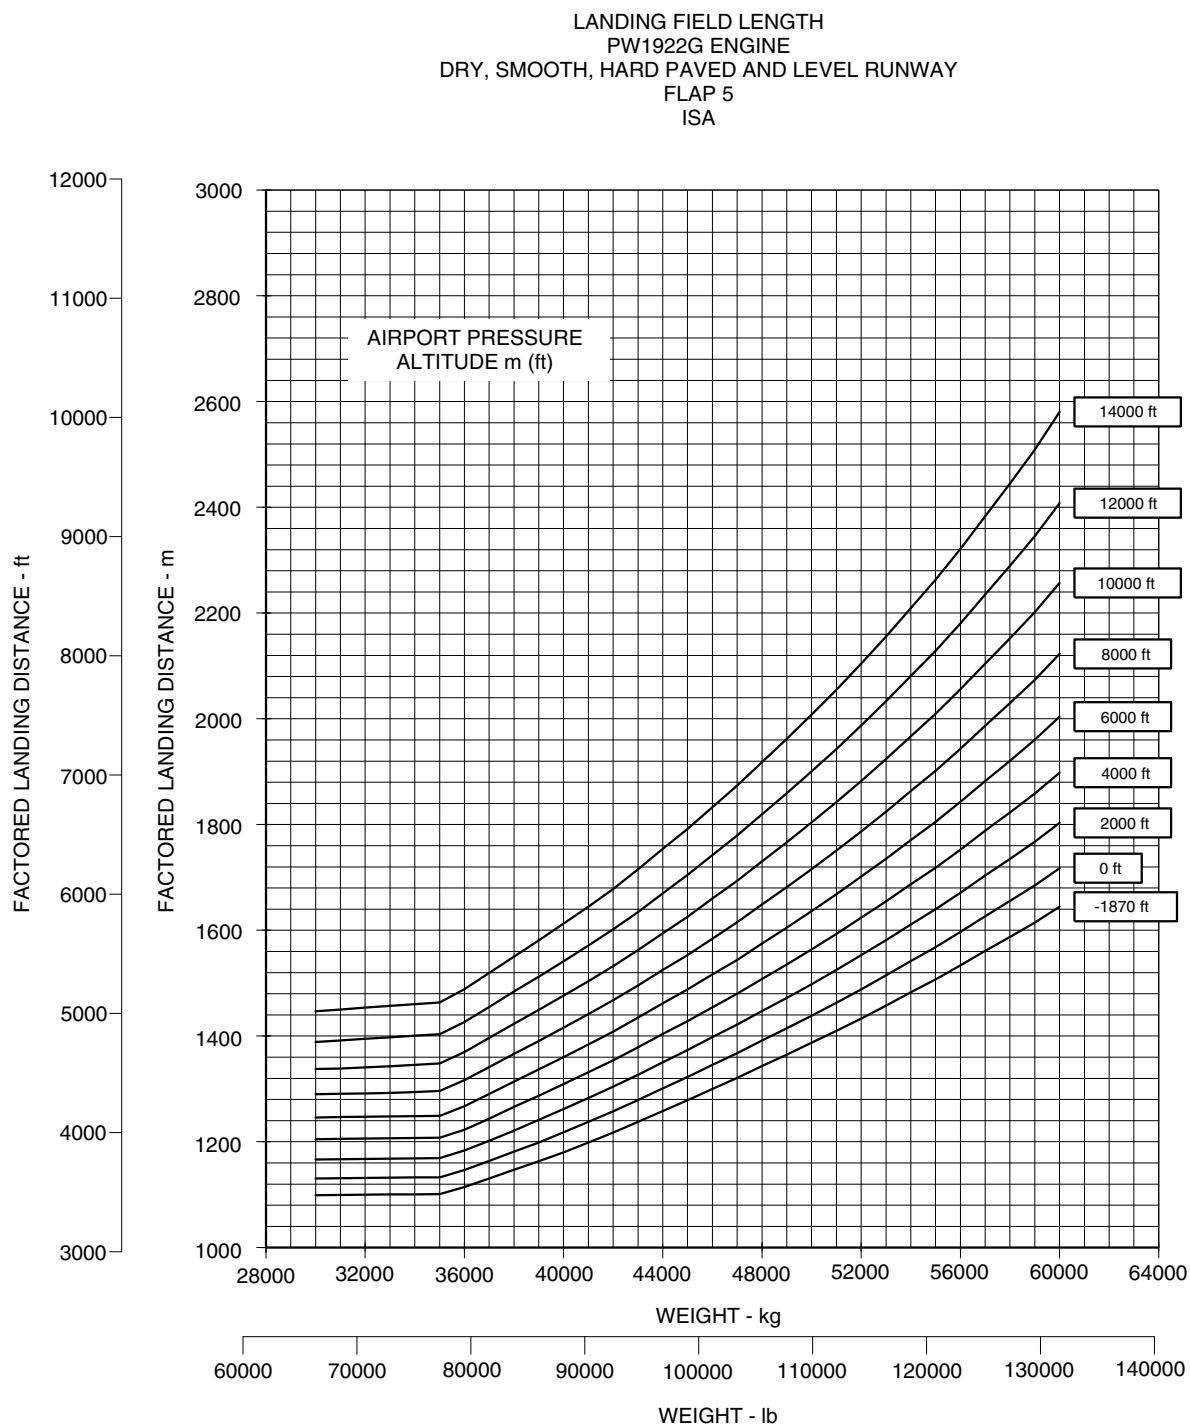


EM170E2APM030013A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT

Landing Field Lengths - Flap 5 - ISA + 15 °C Conditions

Figure 3.20

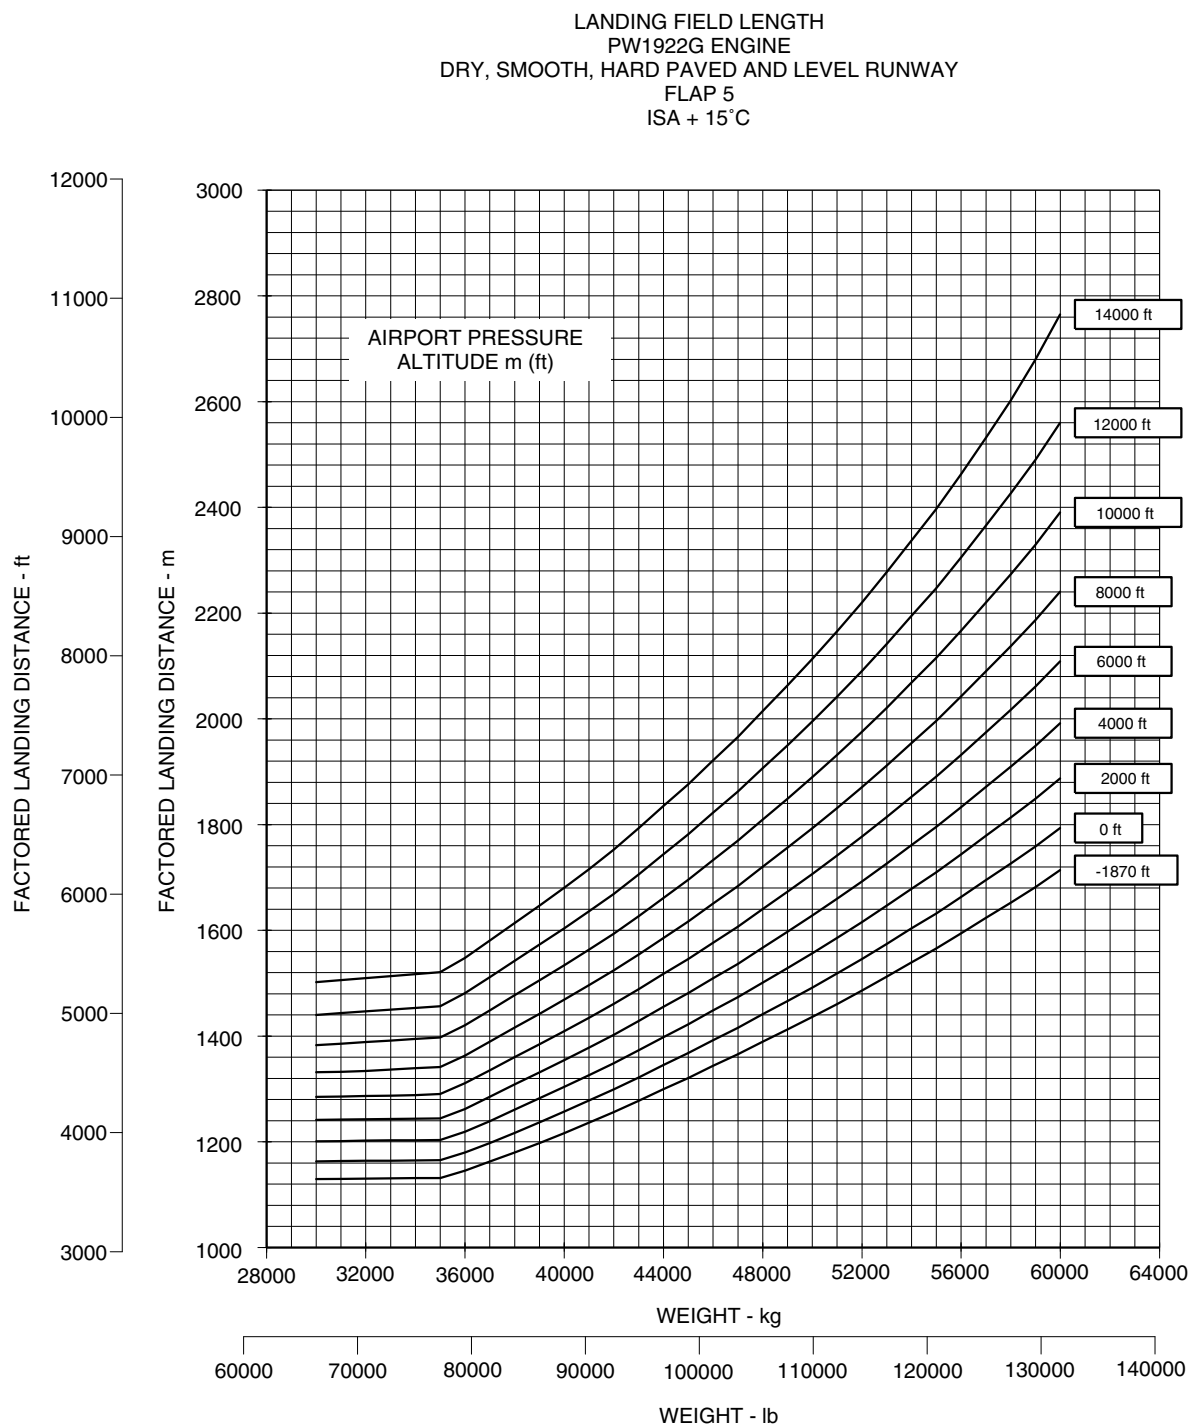


EM170E2APM030014A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT

Landing Field Lengths - Flap Full - ISA Conditions

Figure 3.21

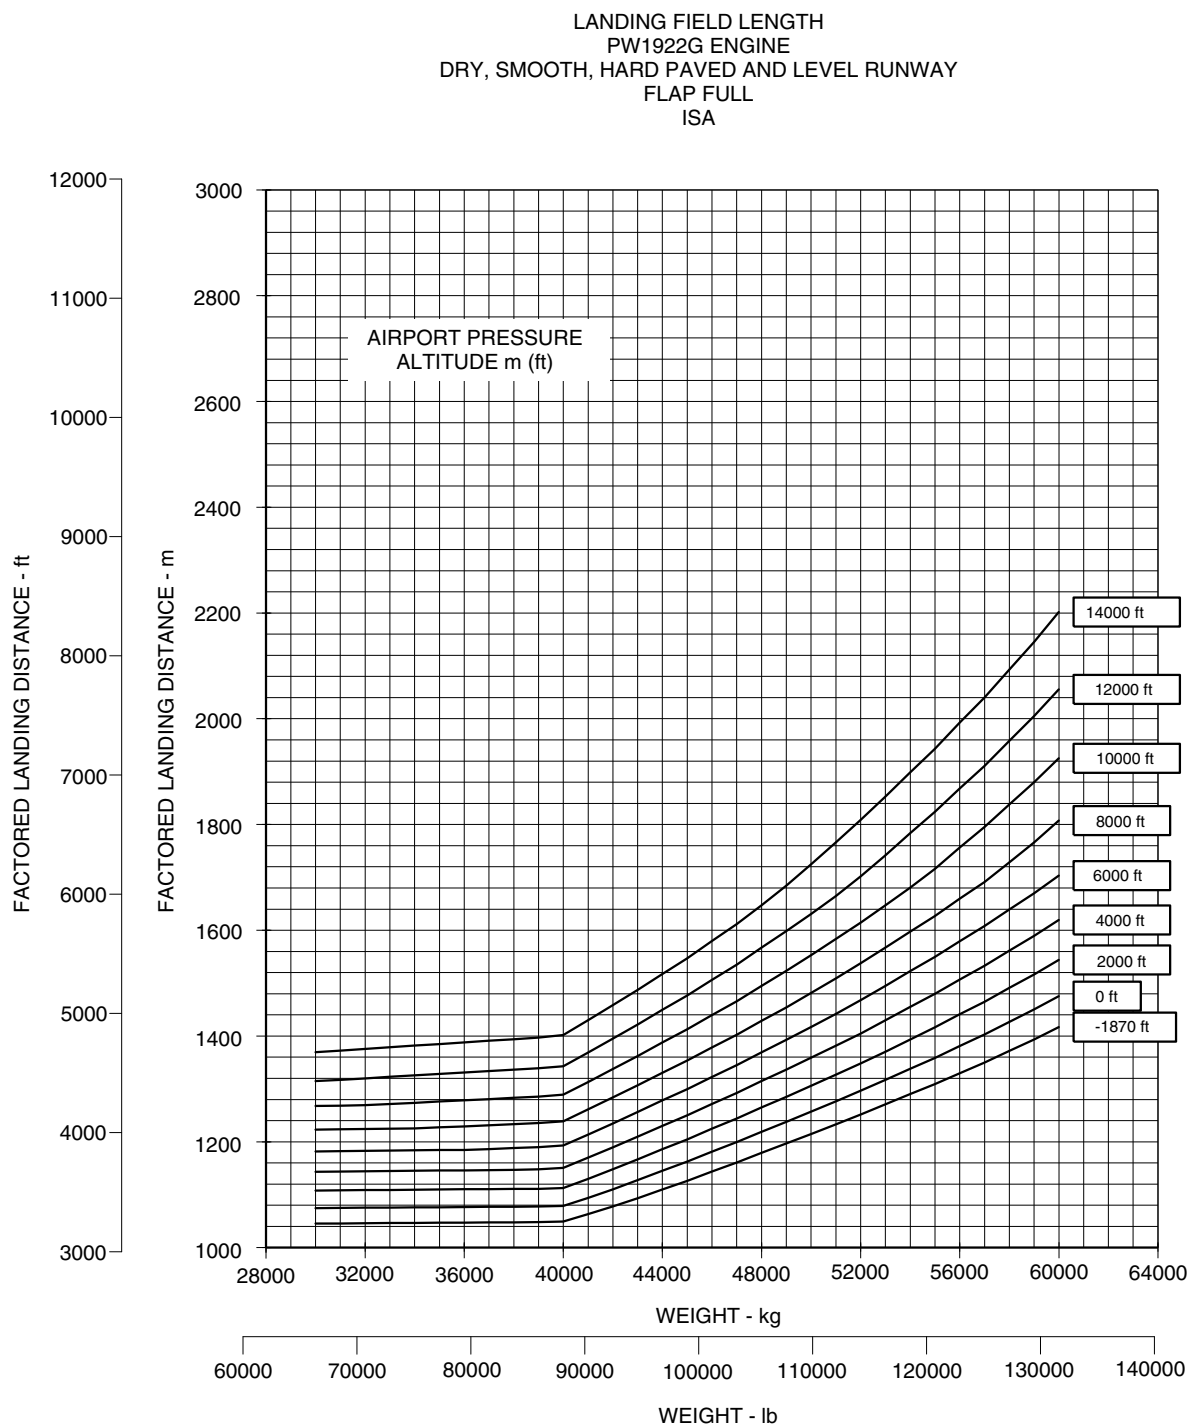


EM170E2APM030015A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT

Landing Field Lengths - Flap Full - ISA + 15 °C Conditions


Figure 3.22

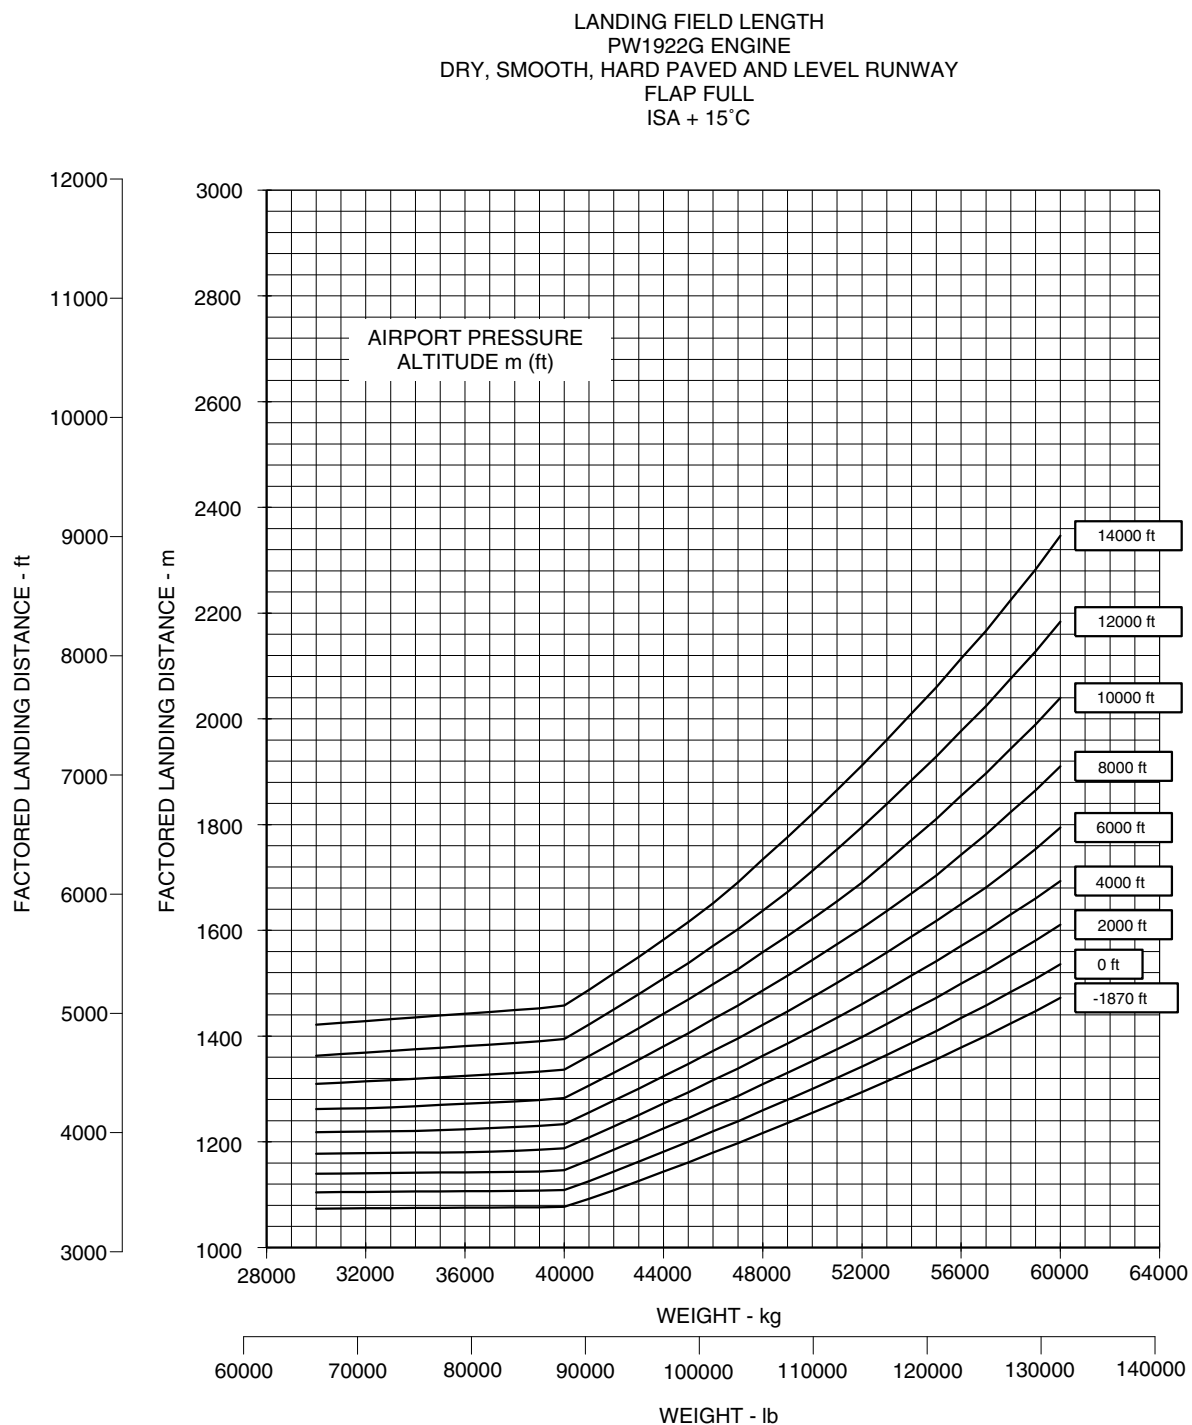

EM170E2APM030016A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
Landing Field Lengths - Flap 5 - ISA Conditions
Figure 3.23

LANDING FIELD LENGTH
ENGINE MODEL PW1921G
FLAP 5
ISA 0
SURFACE TYPE NORMAL
RUNWAY CONDITION DRY

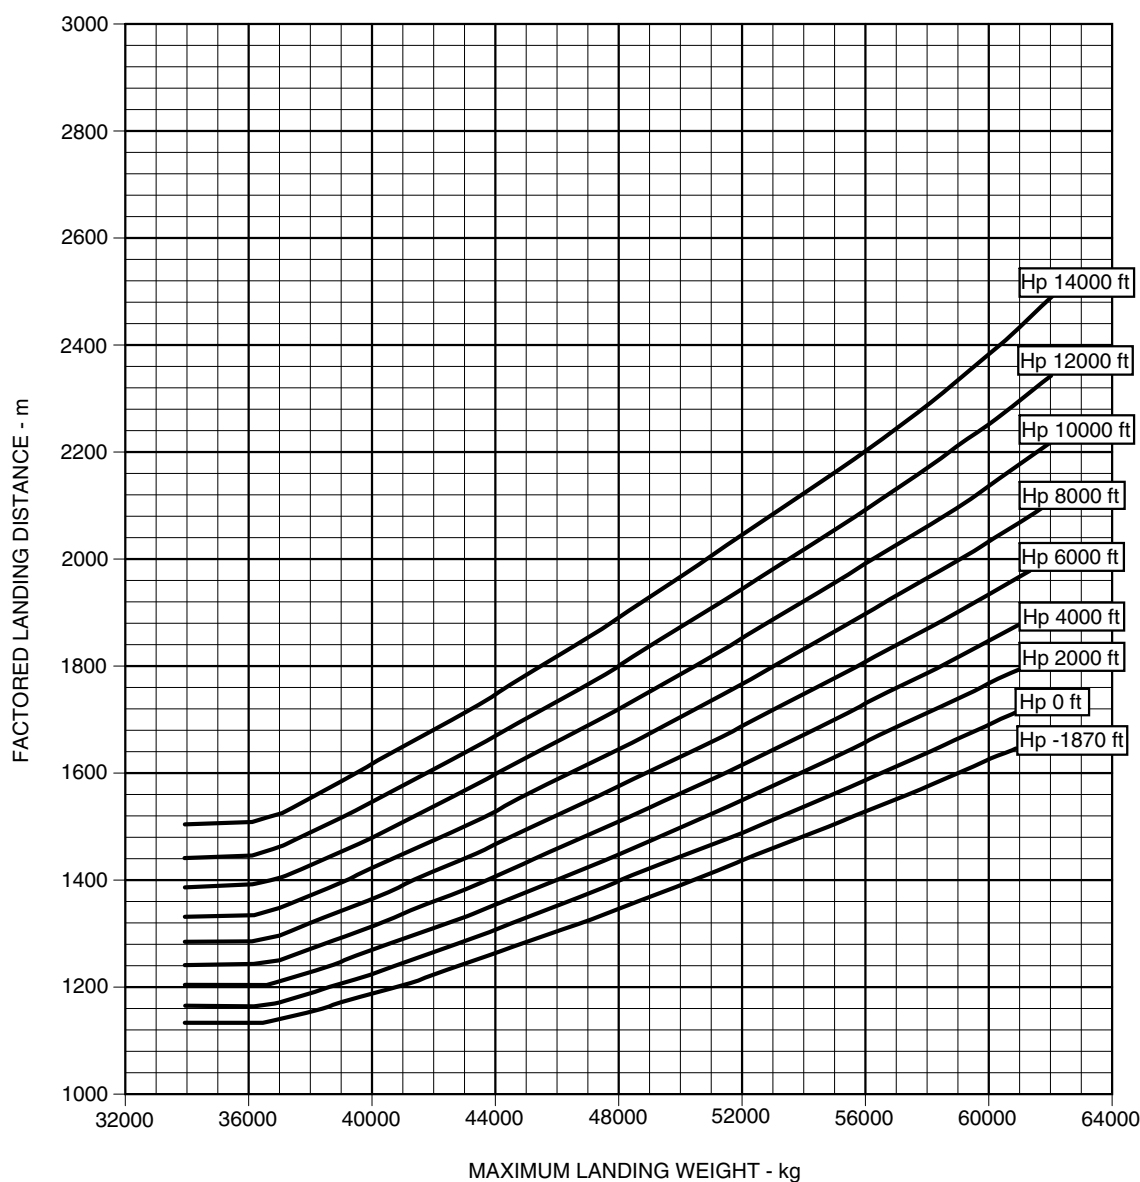


EM170E2APM030020A.IDR



EFFECTIVITY: EMBRAER 195-E2 ACFT

Landing Field Lengths - Flap 5 - ISA + 15 °C Conditions


Figure 3.24

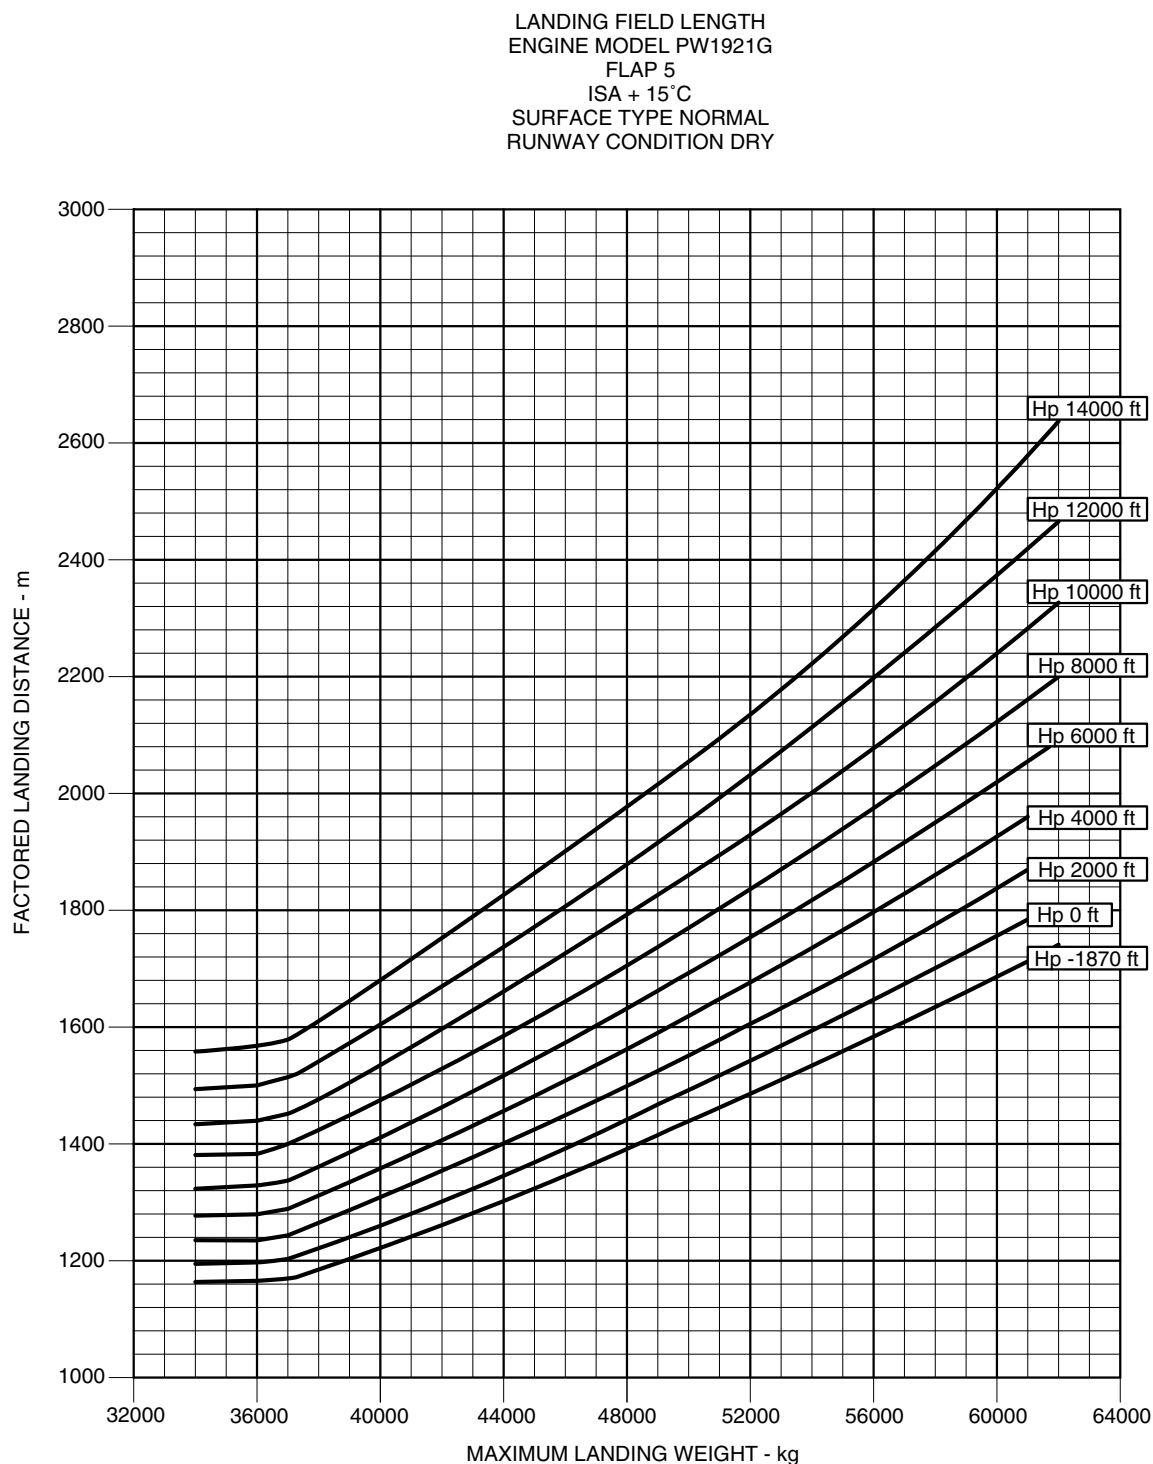

EM170E2APM030019A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
Landing Field Lengths - Flap Full - ISA Conditions
Figure 3.25

LANDING FIELD LENGTH
ENGINE MODEL PW1921G
FLAP FULL
ISA 0
SURFACE TYPE NORMAL
RUNWAY CONDITION DRY

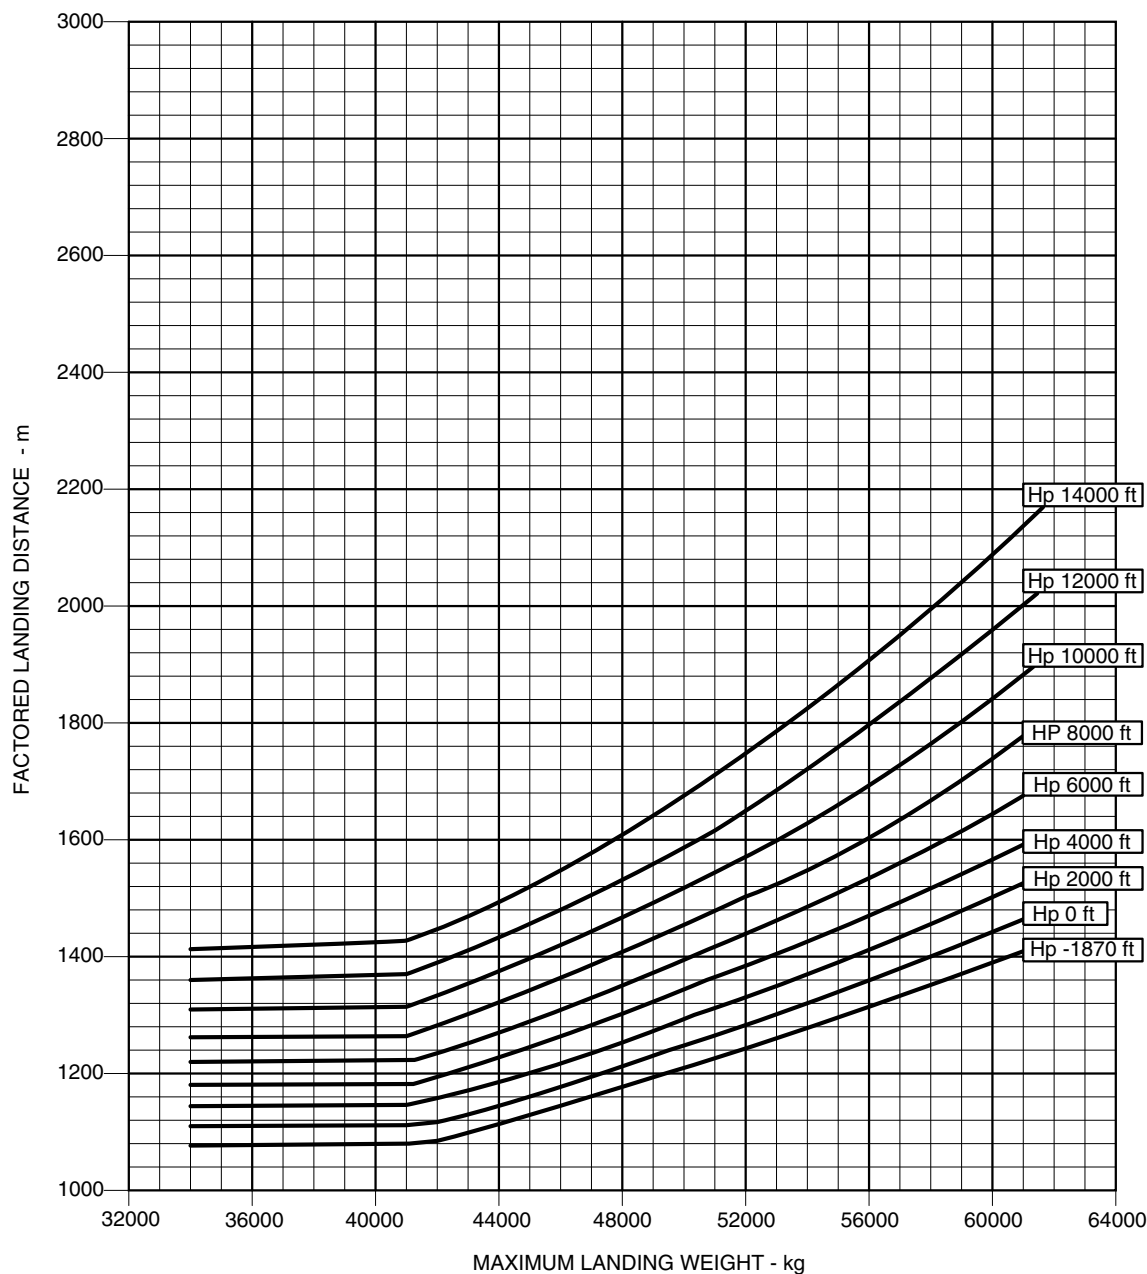


EM170E2APM030018A.IDR



EFFECTIVITY: EMBRAER 195-E2 ACFT


Landing Field Lengths - Flap Full - ISA + 15 °C Conditions

Figure 3.26

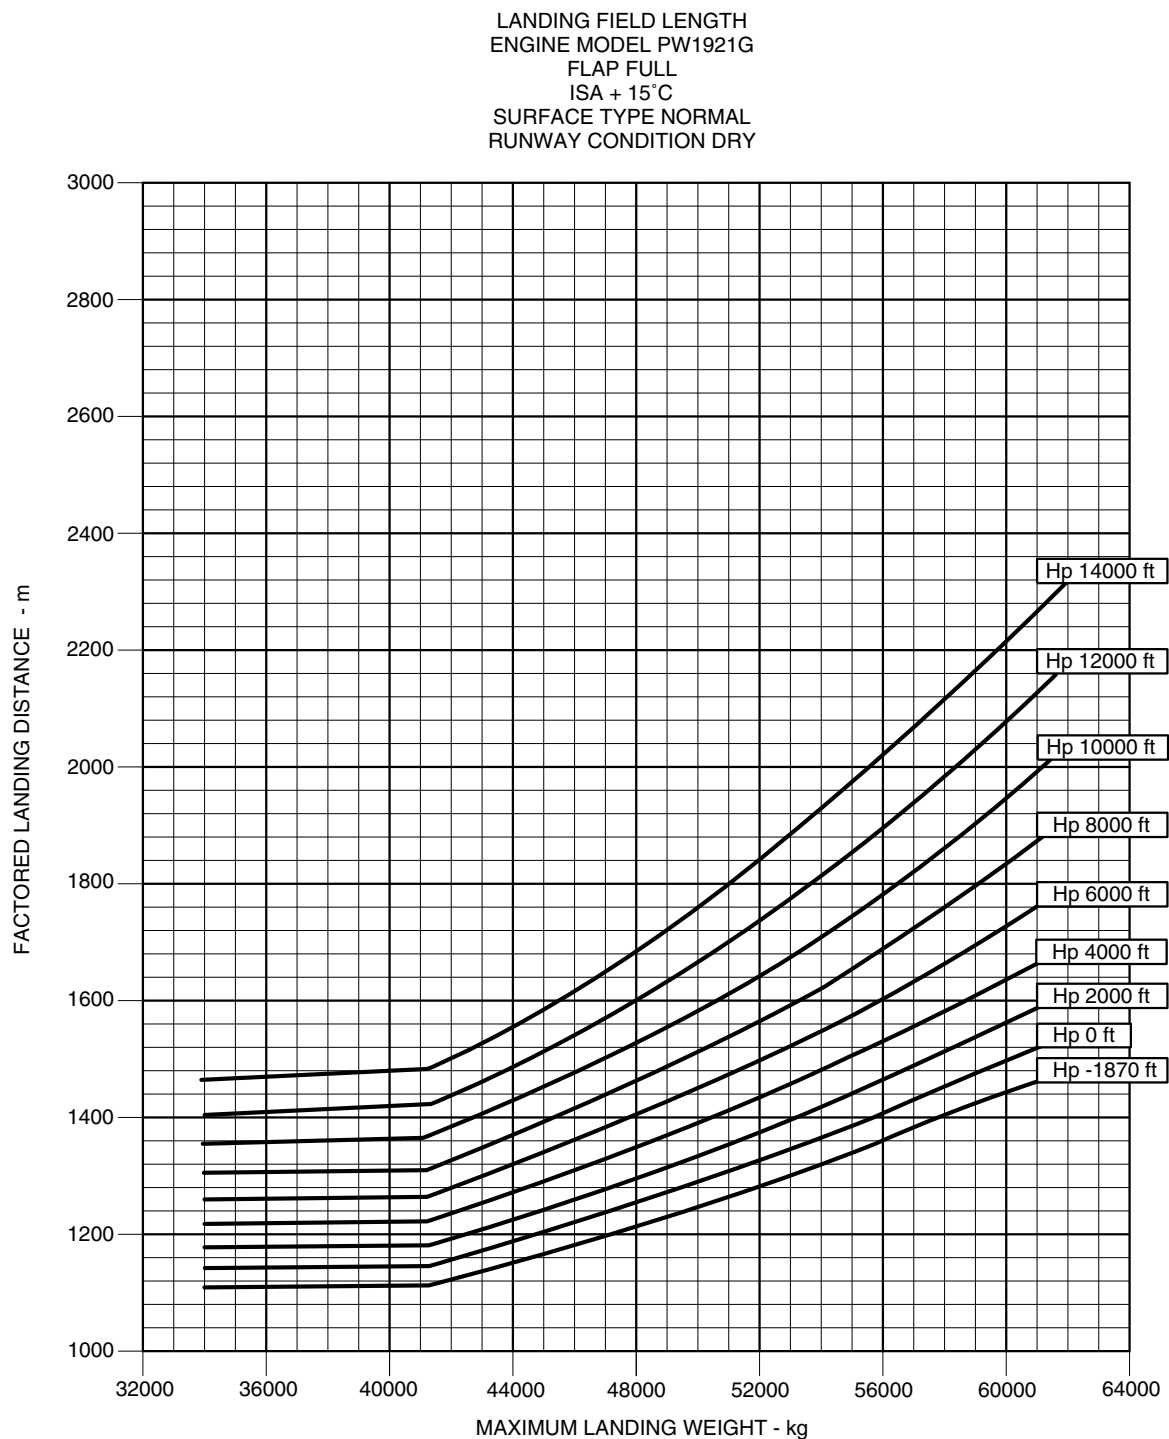

EM170E2APM030017A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
Landing Field Lengths - Flap 5 - ISA Conditions
Figure 3.27

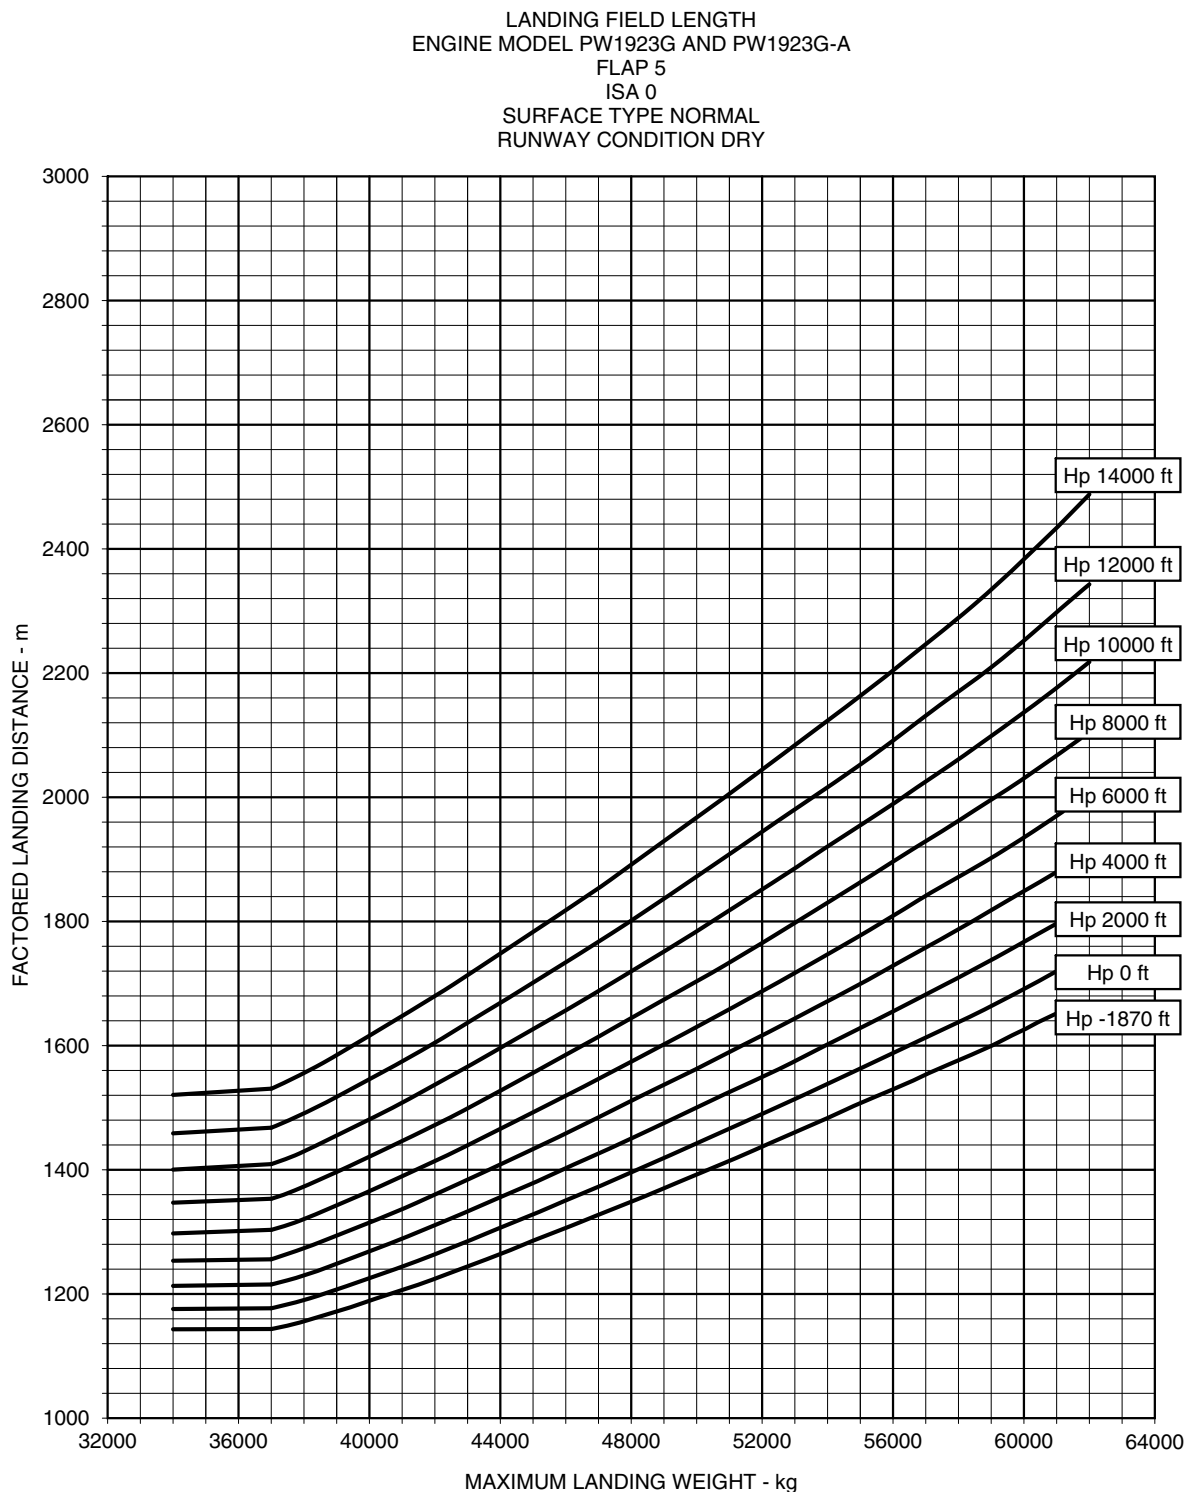


EM170E2APM030024A.IDR



EFFECTIVITY: EMBRAER 195-E2 ACFT


Landing Field Lengths - Flap 5 - ISA + 15 °C Conditions

Figure 3.28

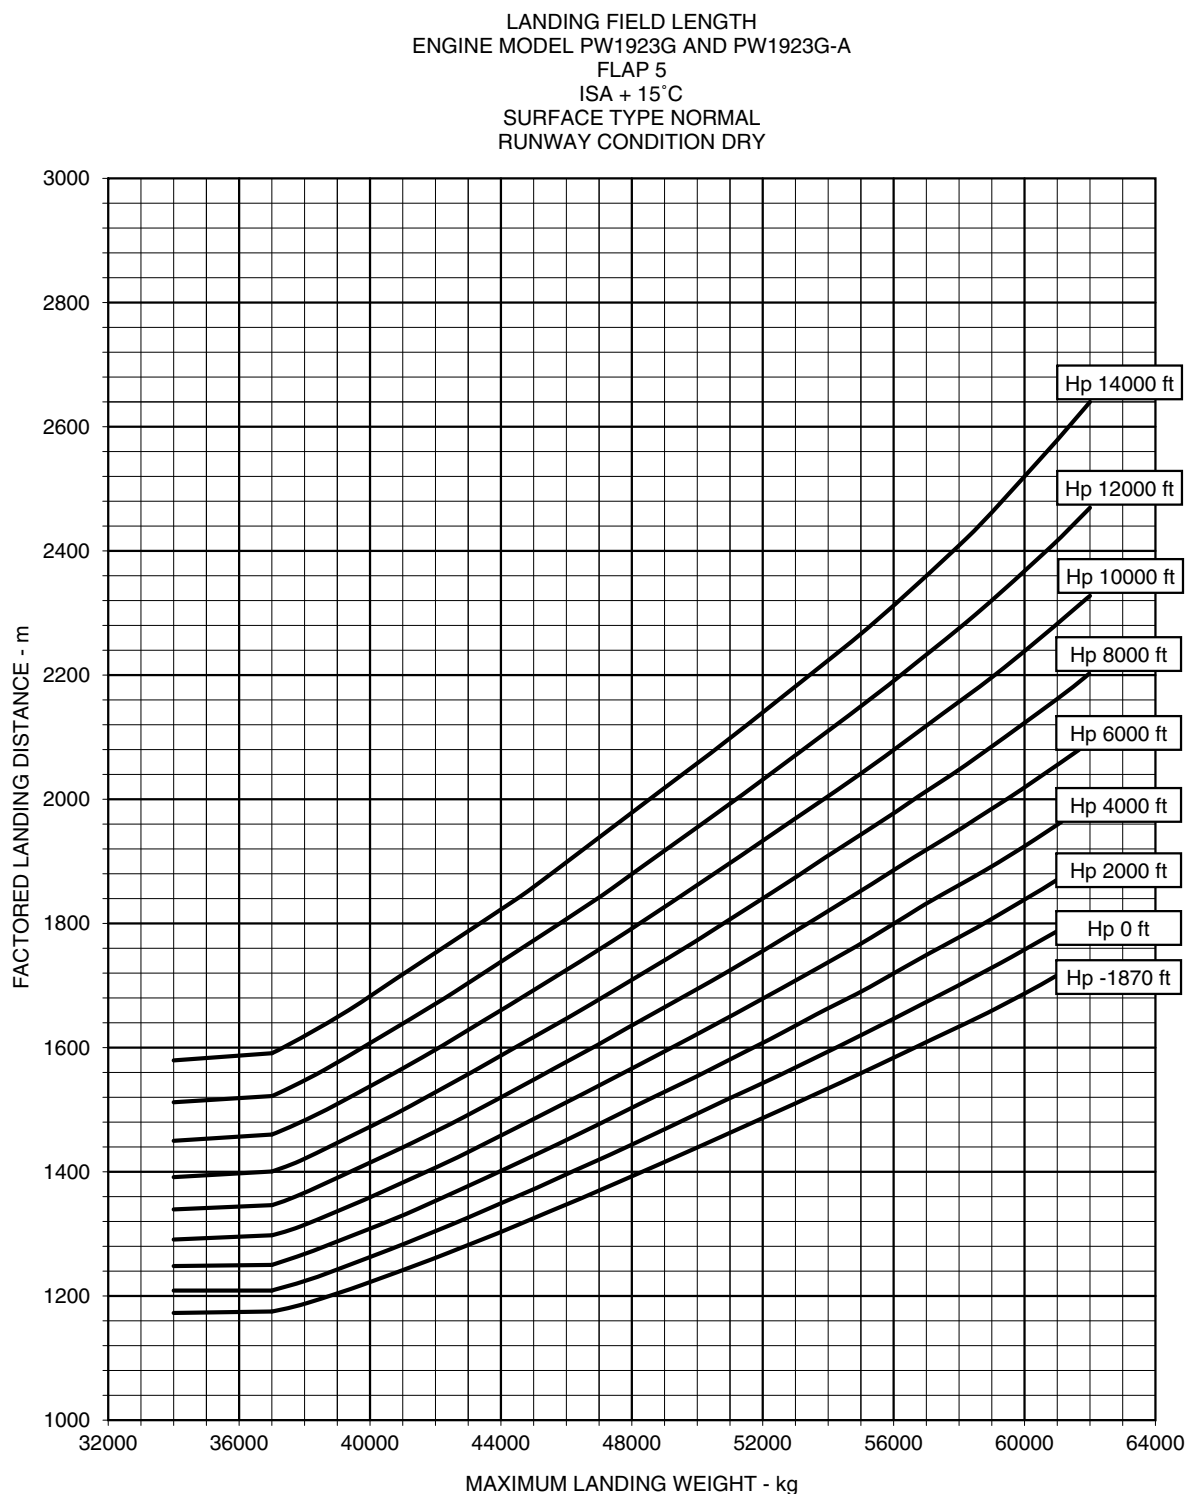

EM170E2APM030023A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
Landing Field Lengths - Flap Full - ISA Conditions
Figure 3.29

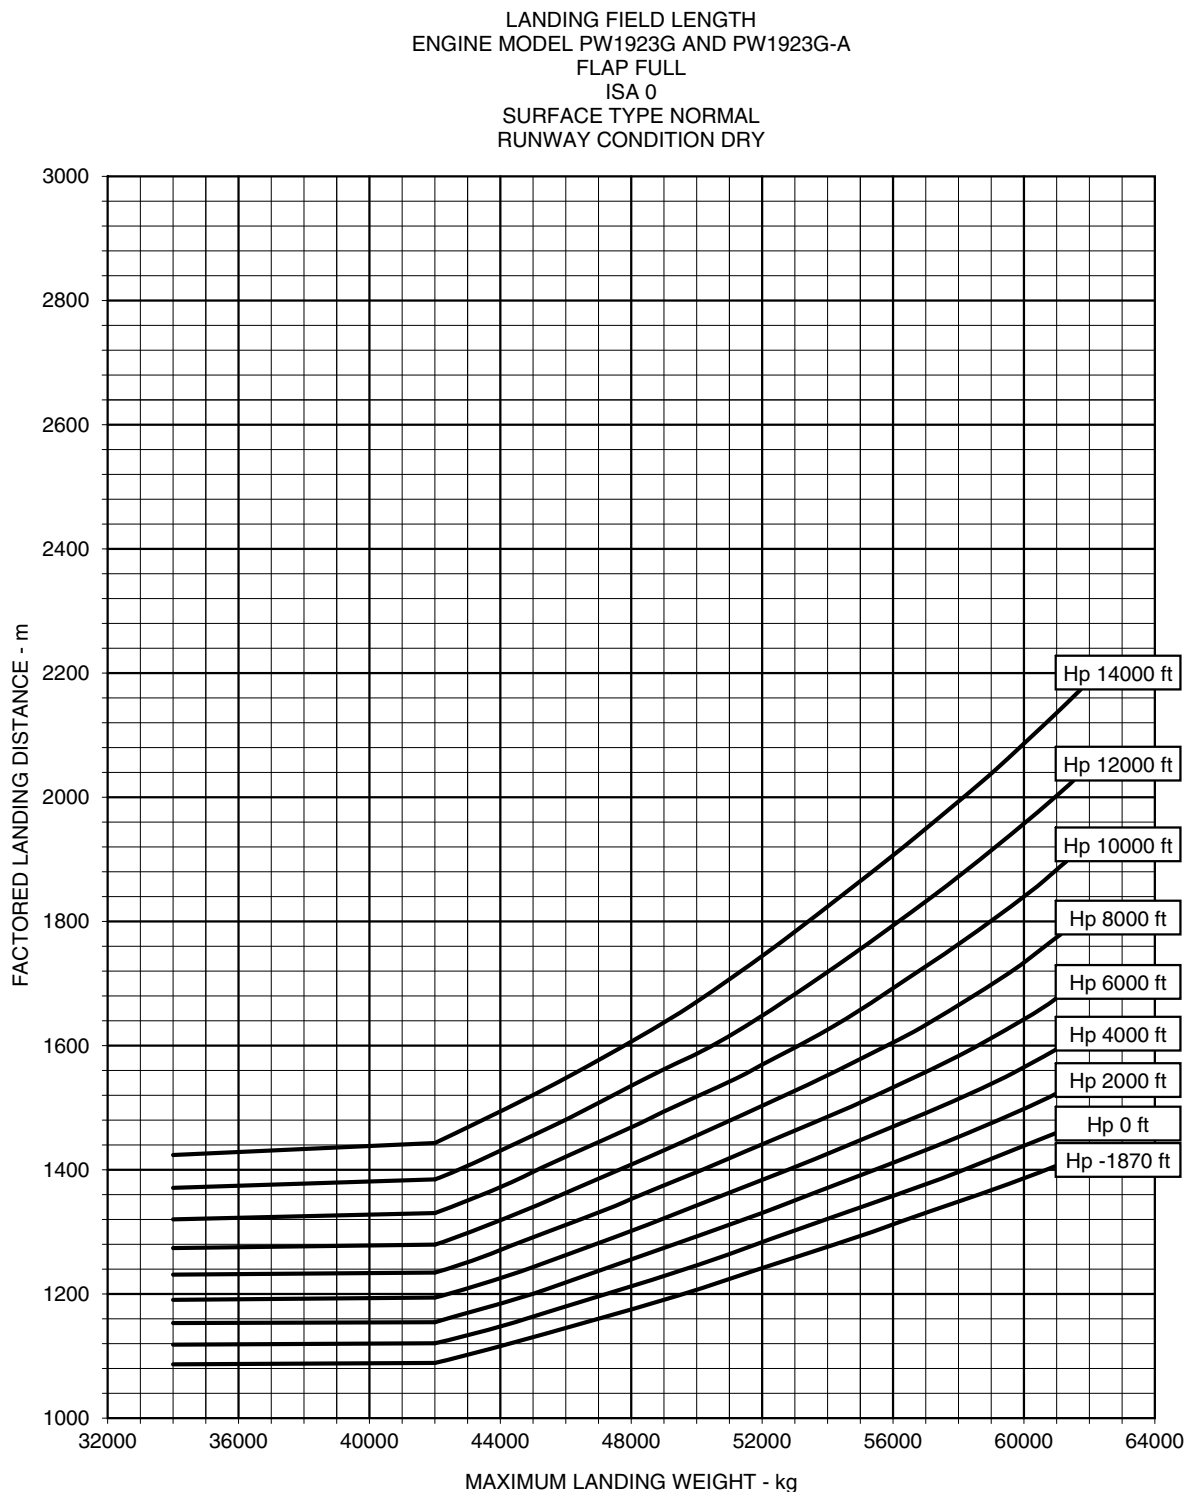


EM170E2APM030022A.IDR



EFFECTIVITY: EMBRAER 195-E2 ACFT

Landing Field Lengths - Flap Full - ISA + 15 °C Conditions

Figure 3.30

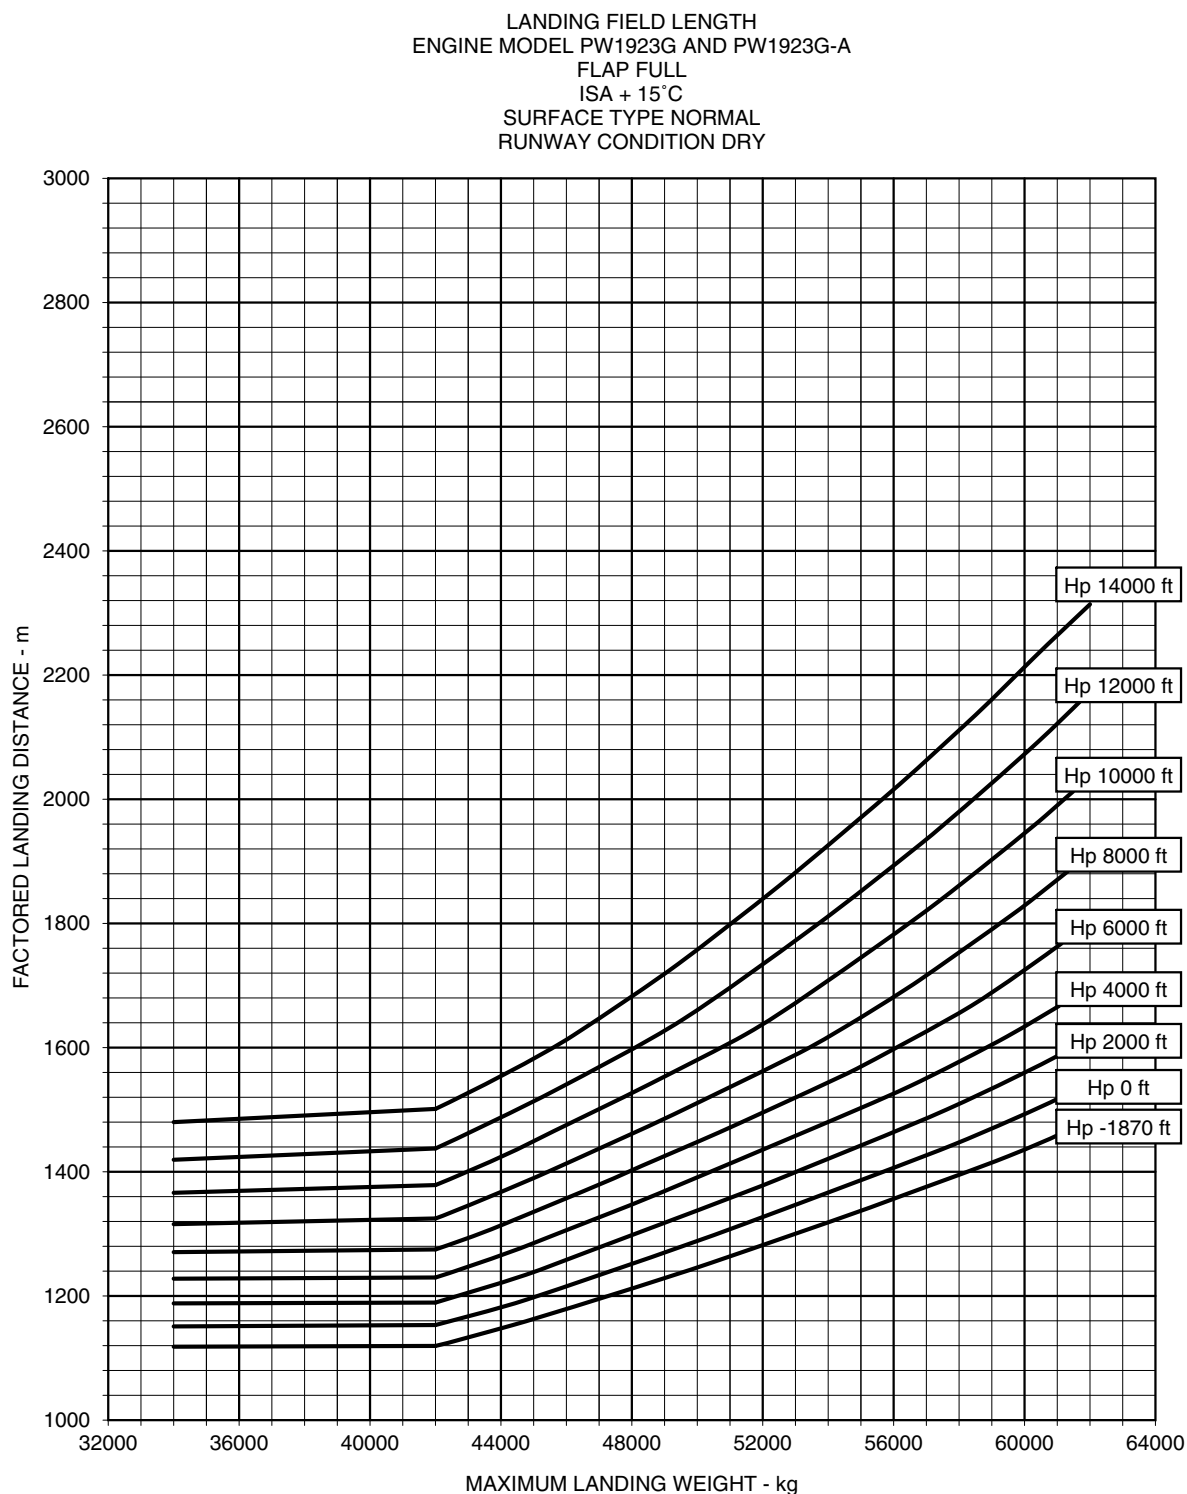

EM170E2APM030021A.IDR

4. GROUND MANEUVERING

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

4.1. GENERAL INFORMATION

This section provides the aircraft turning capability and maneuvering characteristics. To facilitate the presentation, the data was determined from theoretical limits imposed by the geometry of the aircraft.

As such, it reflects the turning capability of the aircraft in favorable operating circumstances. This data should be used only as guideline for the method of determining such parameters and for the maneuvering characteristics of the aircraft.

In the ground operating mode, varying airline practices may demand that more conservative turning procedures be adopted, to avoid excessive tire wear and reduce possible maintenance problems.

Variations from standard aircraft operating patterns may be necessary to satisfy physical constants within the maneuvering area, such as adverse grades, limited area, or high risk of jet blast damage. For these reasons, the ground maneuvering requirements should be coordinated with the using airline prior to the layout planning.

This section is presented as follows:

- The turning radii for nose landing gear steering angles.
- The pilot's visibility from the cockpit and the limits of ambinoocular vision through the windows. Ambinoocular vision is defined as the total field of vision seen by both eyes at the same time.
- The performance of the aircraft on runway-to-taxiway, taxiway-to-taxiway and runway holding bays dimensions.

4.2. TURNING RADII


This subsection presents the following information:

- The turning radii for various nose landing gear steering angles. The minimum turning radius is determined considering that the maximum nose landing gear steering angle is 76 degrees left and right.
- Data on the minimum width of the pavement for a 180° turn.

EFFECTIVITY: EMBRAER 190-E2 ACFT

Turning Radii - No Slip Angle

Figure 4.1

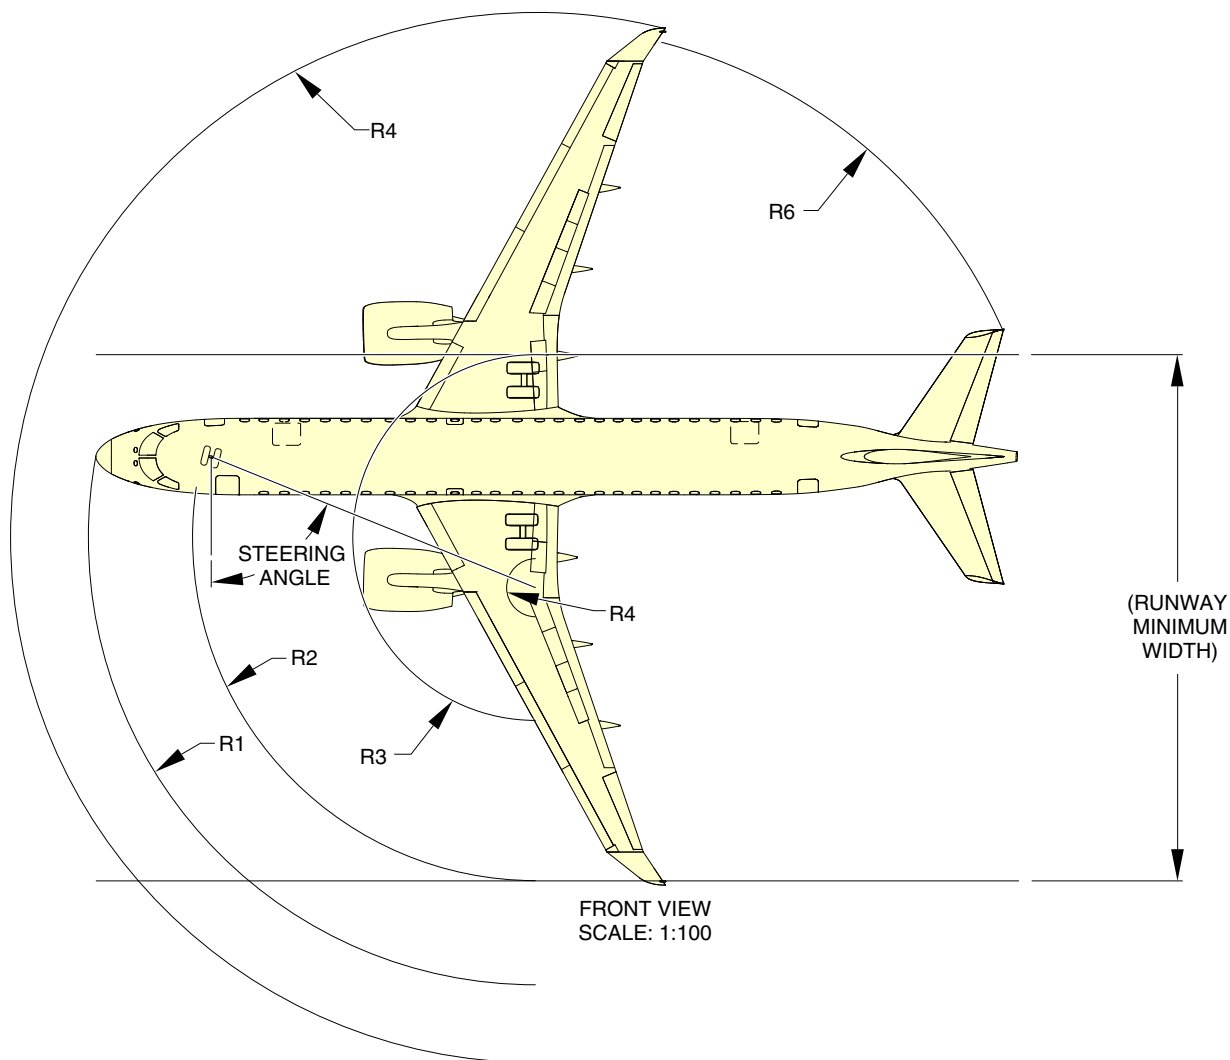

NOTE:


DATA PRESENTED IS BASED ON THEORETICAL CALCULATIONS.
ACTUAL OPERATING DATA MAY BE GREATER THAN SHOWN SINCE
TIRE SLIPPAGE IS NOT CONSIDERED IN THESE CALCULATIONS.

STEERING STEEL	NOSE		NOSE GEAR		OUTBOARD GEAR		INBOARD GEAR		RIGHT WINGLET		RIGHT TAILTIP	
	R1		R2		R3		R4		R5		R6	
35°	25.30 m	83 ft	22.62 m	74 ft 21 in	22.26 m	73 ft 03 in	14.23 m	46 ft 70 in	35.47 m	116 ft 37 in	29.64 m	97 ft 24 in
40°	23.20 m	76 ft 11 in	20.22 m	66 ft 34 in	19.24 m	63 ft 12 in	11.21 m	36 ft 77 in	32.49 m	106 ft 60 in	27.33 m	89 ft 66 in
45°	21.60 m	70 ft 87 in	18.42 m	60 ft 43 in	16.80 m	55 ft 12 in	8.80 m	28 ft 87 in	30.07 m	98 ft 65 in	25.57 m	83 ft 90 in
50°	20.42 m	67 ft	17.03 m	55 ft 87 in	14.74 m	48 ft 36 in	6.70 m	22 ft	28.05 m	92 ft 03 in	24.19 m	79 ft 36 in
55°	19.53 m	64 ft 08 in	15.94 m	52 ft 30 in	13.00 m	42 ft 65 in	4.93 m	16 ft 17 in	26.30 m	86 ft 30 in	23.08 m	75 ft 72 in
60°	18.53 m	61 ft 84 in	15.10 m	49 ft 54 in	11.40 m	37 ft 74 in	3.36 m	11 ft 02 in	24.76 m	81 ft 23 in	22.16 m	72 ft 70 in
65°	18.33 m	60 ft 13 in	14.44 m	47 ft 37 in	9.98 m	32 ft 11 in	1.94 m	6 ft 36 in	23.38 m	76 ft 70 in	21.40 m	70 ft 21 in
70°	17.94 m	58 ft 86 in	13.94 m	45 ft 73 in	8.67 m	28 ft 44 in	0.63 m	2 ft 07 in	22.10 m	72 ft 50 in	20.76 m	68 ft 11 in
76°	17.61 m	57 ft 77 in	13.52 m	44 ft 35 in	7.20 m	23 ft 62 in	0.83 m	2 ft 72 in	20.68 m	67 ft 85 in	20.13 m	66 ft 04 in

EM170E2APM040001B.IDR

4.3. MINIMUM TURNING RADII

EFFECTIVITY: EMBRAER 190-E2 ACFT
Minimum Turning Radius
Figure 4.2

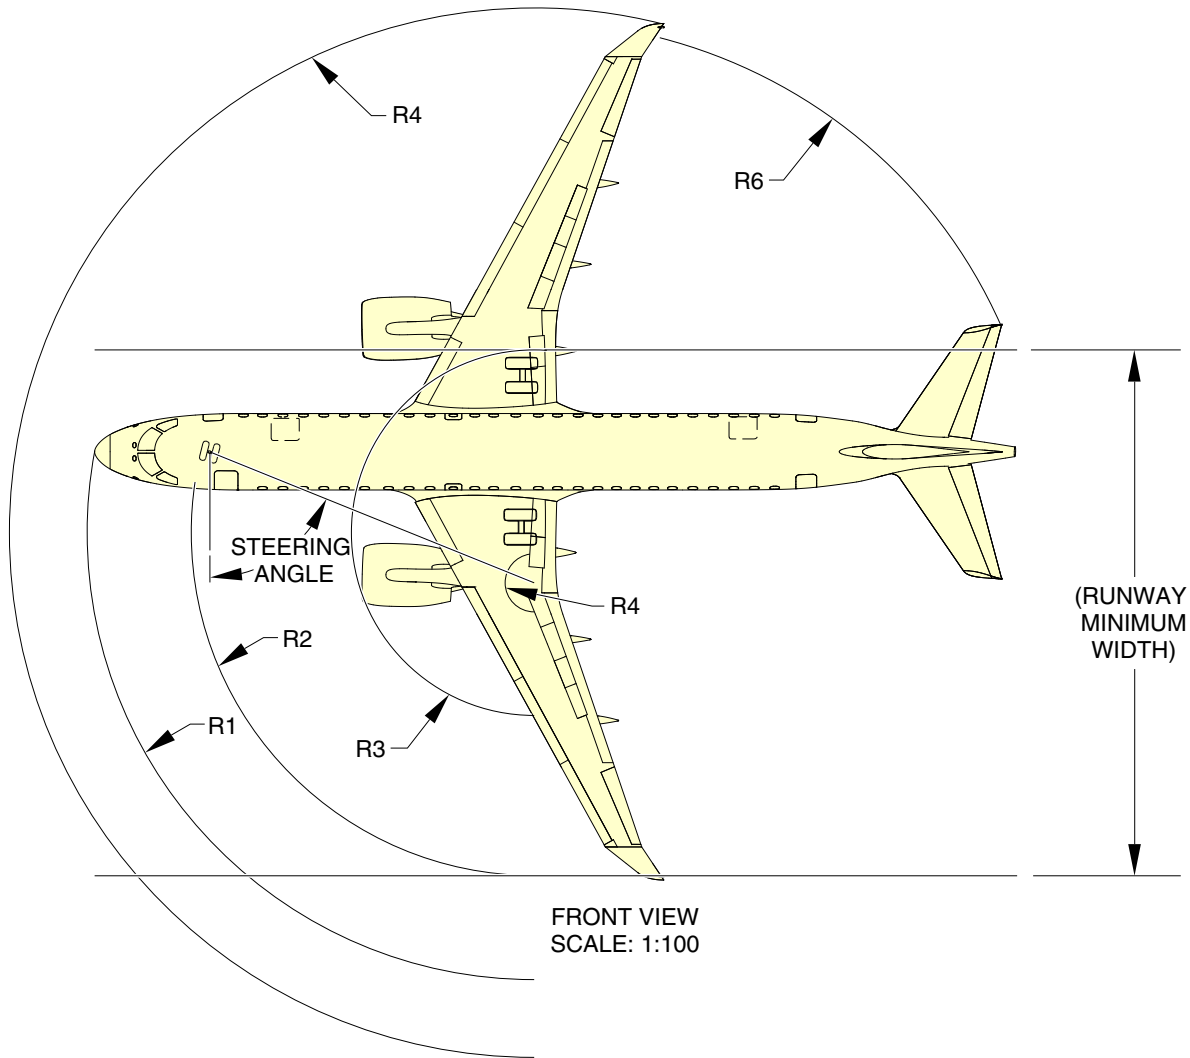

NOTE:
ACTUAL OPERATING DATA MAY BE GREATER THAN VALUES SHOWN
SINCE TIRE SLIPPAGE IS NOT CONSIDERED IN THESE CALCULATIONS.


STEERING STEEL	NOSE		NOSE GEAR		OUTBOARD GEAR		INBOARD GEAR		RIGHT WINGLET		RIGHT TAILTIP	
	R1		R2		R3		R4		R5		R6	
76°	17.61 m	57 ft 77 in	13.52 m	44 ft 35 in	7.20 m	23 ft 62 in	0.83 m	2 ft 72 in	20.68 m	67 ft 85 in	20.13 m	66 ft 04 in

EM170E2APM040002B.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT

Turning Radii - No Slip Angle

Figure 4.3

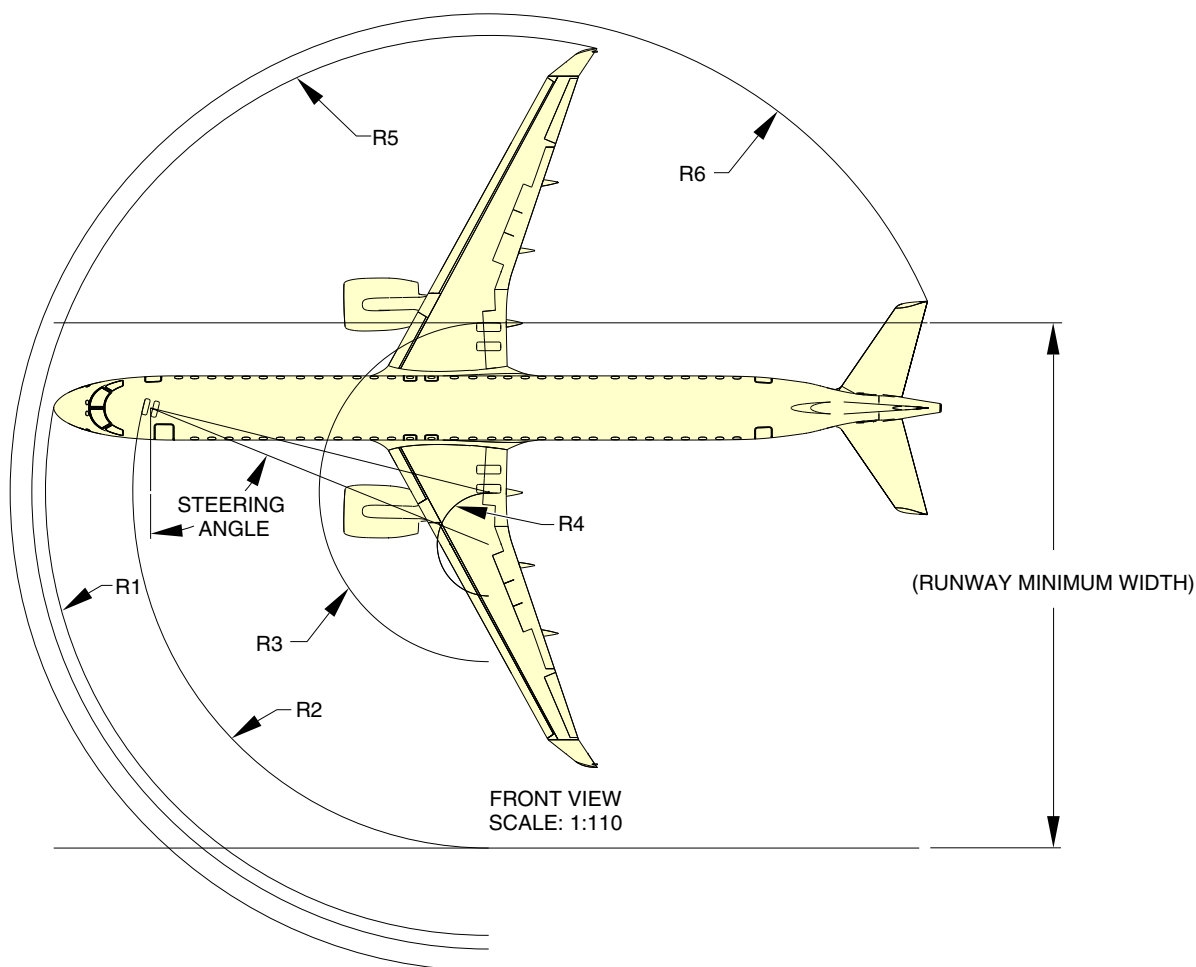


NOTE:
DATA PRESENTED IS BASED ON THEORETICAL CALCULATIONS.
ACTUAL OPERATING DATA MAY BE GREATER THAN SHOWN SINCE
TIRE SLIPPAGE IS NOT CONSIDERED IN THESE CALCULATIONS.

STEERING STEEL	NOSE		NOSE GEAR		OUTBOARD GEAR		INBOARD GEAR		RIGHT WINGLET		RIGHT TAIL TIP		RUNWAY WIDTH	
	R1	R2	R1	R2	R3	R4	R5	R6	R5	R6	R5	R6		
35°	30.62 m	100 ft 5.5 in	27.99 m	91 ft 10.0 in	26.63 m	87 ft 4.4 in	18.65 m	61 ft 2.3 in	40.48 m	132 ft 9.7 in	34.46 m	113 ft 0.7 in	54.62 m	179 ft 2.4 in
40°	27.91 m	91 ft 6.8 in	25.01 m	82 ft 0.6 in	22.89 m	75 ft 1.2 in	14.90 m	48 ft 10.6 in	36.76 m	120 ft 7.2 in	31.53 m	103 ft 5.3 in	47.90 m	157 ft 1.8 in
45°	25.91 m	85 ft 0.1 in	22.77 m	74 ft 8.5 in	19.85 m	65 ft 1.5 in	11.86 m	38 ft 10.9 in	33.74 m	110 ft 8.3 in	29.30 m	96 ft 1.5 in	42.61 m	139 ft 9.6 in
50°	24.40 m	80 ft 0.6 in	21.04 m	69 ft 0.3 in	17.30 m	56 ft 9.1 in	9.31 m	30 ft 6.5 in	31.22 m	102 ft 5.1 in	27.54 m	90 ft 4.3 in	38.34 m	125 ft 9.4 in
55°	23.26 m	76 ft 3.7 in	10.70 m	35 ft 1.3 in	15.10 m	49 ft 6.5 in	7.11 m	23 ft 3.9 in	29.05 m	95 ft 3.7 in	26.12 m	85 ft 8.3 in	34.80 m	114 ft 2.1 in
60°	22.39 m	73 ft 5.5 in	18.65 m	61 ft 2.3 in	13.15 m	43 ft 1.7 in	5.16 m	16 ft 11.1 in	27.13 m	89 ft 0.1 in	24.97 m	81 ft 11.1 in	31.80 m	104 ft 4.0 in
65°	21.71 m	71 ft 2.7 in	17.84 m	58 ft 6.4 in	11.39 m	37 ft 4.4 in	3.40 m	11 ft 1.9 in	25.39 m	83 ft 3.6 in	24.02 m	78 ft 9.7 in	29.22 m	95 ft 10.4 in
70°	21.21 m	69 ft 7.0 in	17.22 m	56 ft 6.0 in	9.76 m	32 ft 0.3 in	1.77 m	5 ft 9.7 in	23.80 m	78 ft 1.0 in	23.22 m	76 ft 2.2 in	26.98 m	88 ft 6.2 in
76°	20.78 m	68 ft 2.1 in	16.69 m	54 ft 9.1 in	7.95 m	26 ft 1.0 in	0.04 m	0 ft 1.6 in	22.02 m	72 ft 2.9 in	22.44 m	73 ft 7.5 in	24.63 m	80 ft 9.7 in

EFFECTIVITY: EMBRAER 195-E2 ACFT

Minimum Turning Radius

Figure 4.4

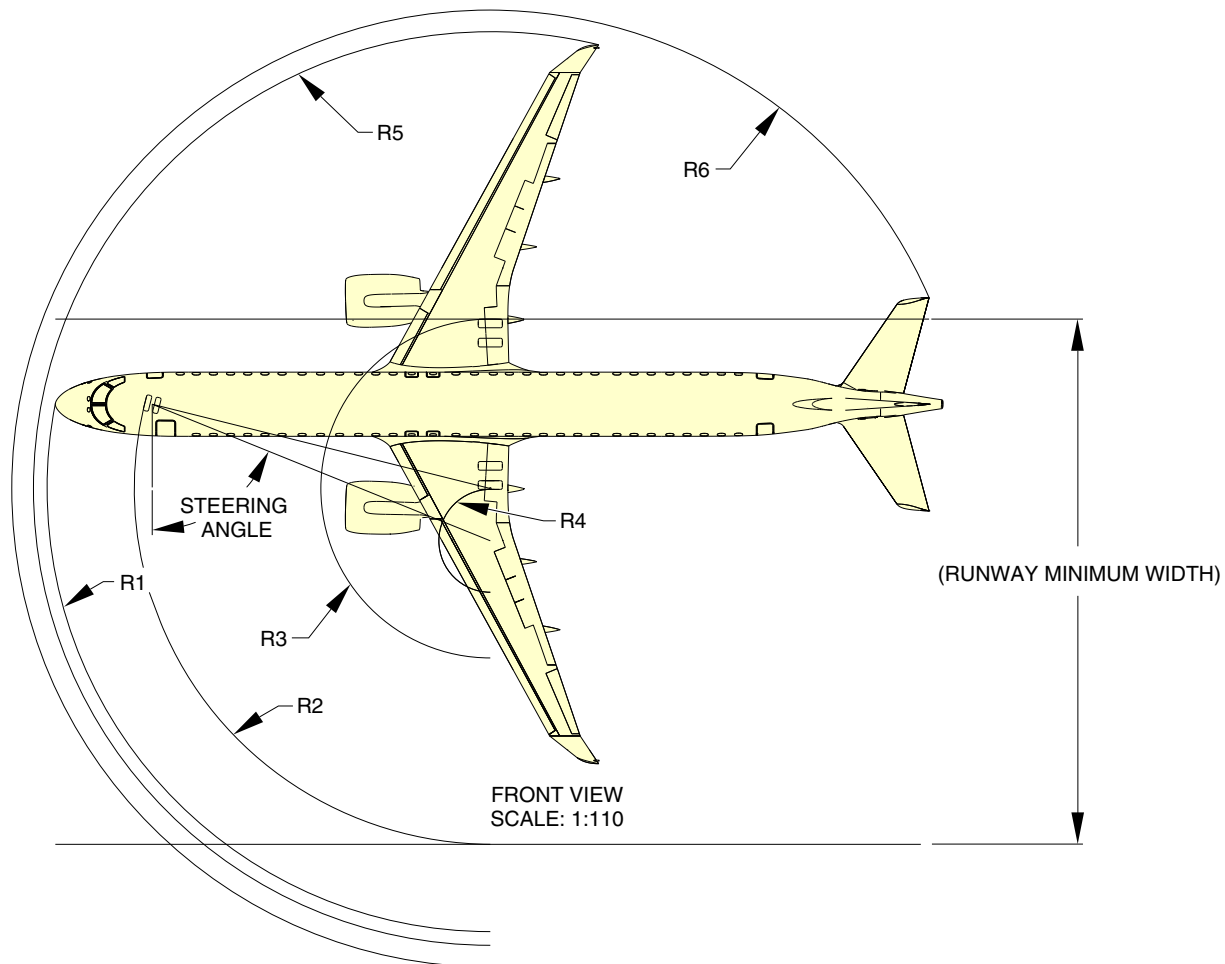

NOTE:

ACTUAL OPERATING DATA MAY BE GREATER THAN VALUES SHOWN
SINCE TIRE SLIPPAGE IS NOT CONSIDERED IN THESE CALCULATIONS.

STEERING STEEL	NOSE		NOSE GEAR		OUTBOARD GEAR		INBOARD GEAR		RIGHT WINGLET		RIGHT TAIL TIP		RUNWAY WIDTH	
	R1		R2		R3		R4		R5		R6			
76°	20.78 m	68 ft 2.1 in	16.69 m	54 ft 9.1 in	7.95 m	26 ft 1.0 in	0.04 m	0 ft 1.6 in	22.02 m	72 ft 2.9 in	22.44 m	73 ft 7.5 in	24.63 m	80 ft 9.7 in


EM170E2APM040011A.IDR

4.4. VISIBILITY FROM COCKPIT

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

Visibility from Cockpit in Static Position

Figure 4.5

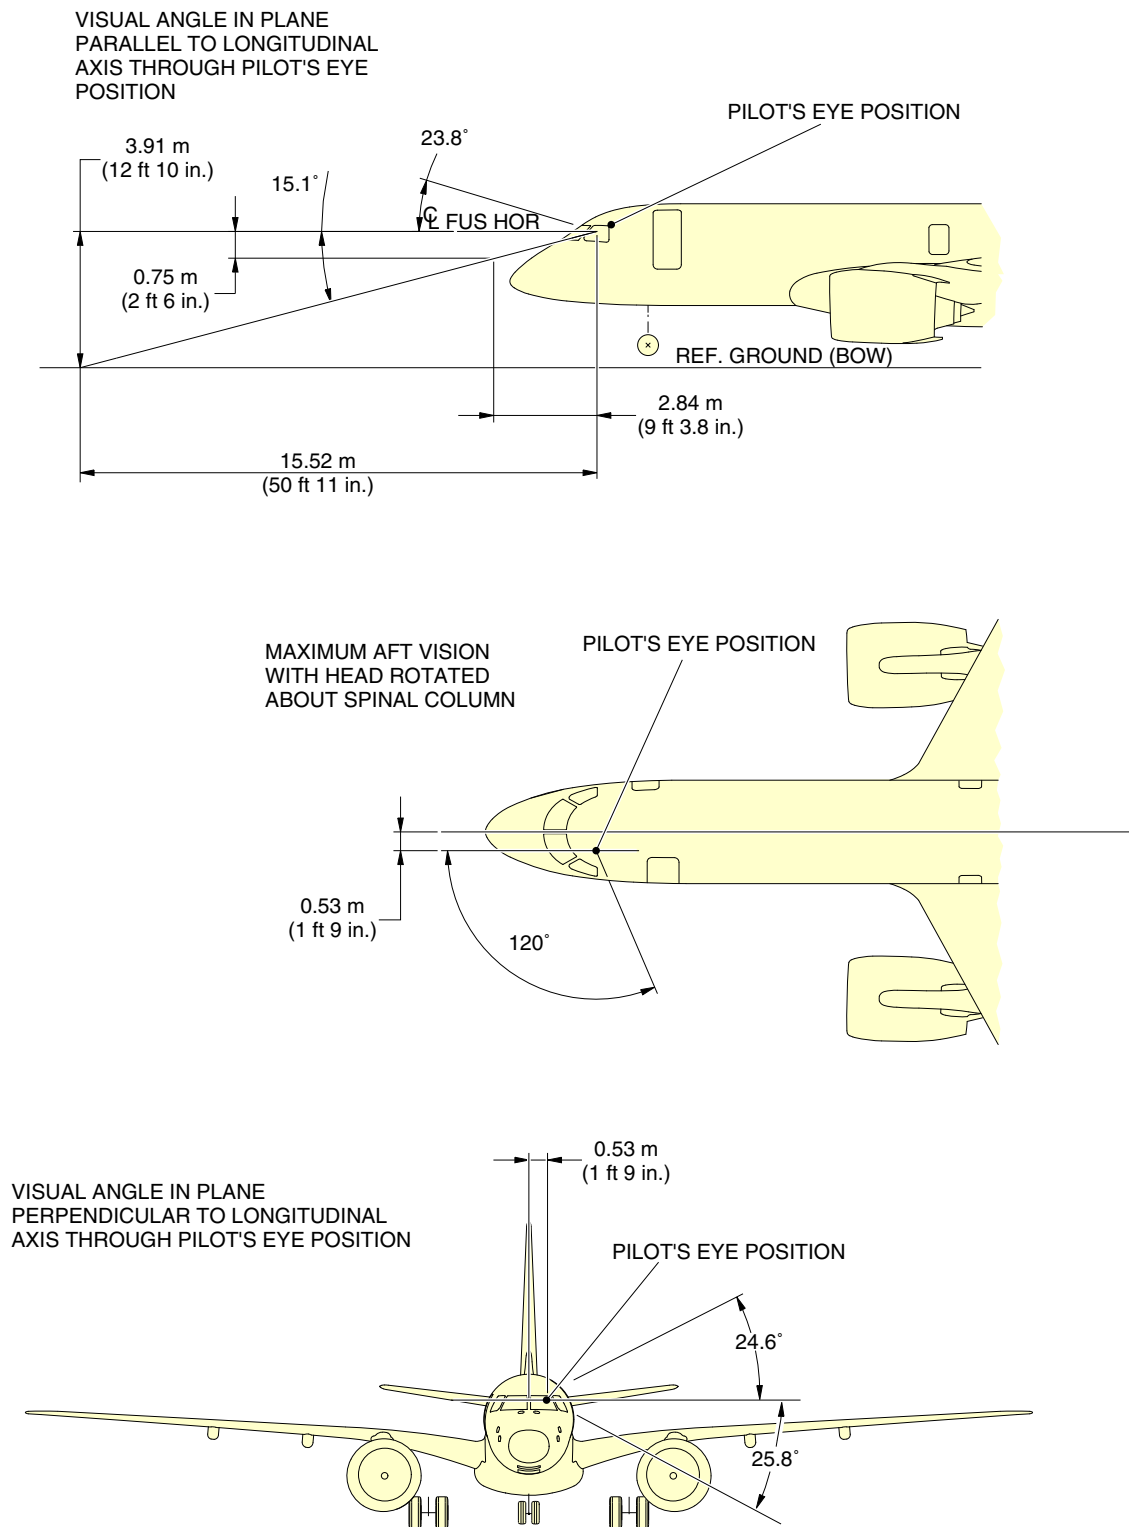

EM170E2APM040003B.IDR

4.5. **RUNWAY AND TAXIWAY DIMENSIONS**

To determine the minimum dimensions for runway and taxiway where the aircraft can be operated, the reference code of the aircraft must be determined.

The reference code of a specific aircraft is obtained in accordance with the Aerodrome Design and Operations - Volume 1, by the ICAO.

The code is composed of two elements which are related to the aircraft performance characteristics and dimensions:

- Element 1 is a number based on the aircraft reference field length;
- Element 2 is a letter based on the aircraft wingspan and outer main landing gear wheel span.

The table below shows the reference codes:

Table 4.1 - Reference Codes

CODE ELEMENT 1		CODE ELEMENT 2		
CODE NUMBER	AIRCRAFT REFERENCE FIELD LENGTH	CODE LETTER	WING SPAN	OUTER MAIN LANDING GEAR WHEEL SPAN
1	less than 800 m (2624 ft 8 in)	A	Up to 15 m (49 ft 3 in)	Up to 4.5 m (14 ft 9 in)
2	800 m (2624 ft 8 in) up to 1200 m (3937 ft)	B	15 m (49 ft 3 in) to 24 m (78 ft 9 in)	4.5 m (14 ft 9 in) to 6 m (19 ft 8 in)
3	1200 m (3937 ft) up to 1800 m (5905 ft 6 in)	C	24 m (78 ft 9 in) to 36 m (118 ft 1 in)	6 m (19 ft 8 in) to 9 m (29 ft 6 in)
4	1800 m (5905 ft 6 in) and over	D	36 m (118 ft 1 in) to 52 m (170 ft 7 in)	9 m (29 ft 6 in) to 14 m (45 ft 11 in)
5	—	E	52 m (170 ft 7 in) to 65 m (213 ft 3 in)	9 m (29 ft 6 in) to 14 m (45 ft 11 in)

In accordance with the table, the reference code for the EMBRAER 190-300 and 190-400 models is 3C.


With the reference code, it is possible to obtain the limits of the runway and taxiway where the aircraft can be operated. For reference code 3C the limits are:

- The width of a runway should not be less than 30 m (98 ft 5 in);
- The width of a taxiway should not be less than 15 m (49 ft 2 in);
- The design of the curve in a taxiway should be such that, when the cockpit is on the taxiway centerline marking, the clearance distance between the outer main landing gear wheels of the aircraft and the edge of the taxiway should not be less than 3 m (9 ft 10 in);
- The clearance between a parked aircraft and one moving along the taxiway in a holding bay should not be less than 15 m (49 ft 2 in).


EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

More than 90° Turn - Runway to Taxiway

Figure 4.6

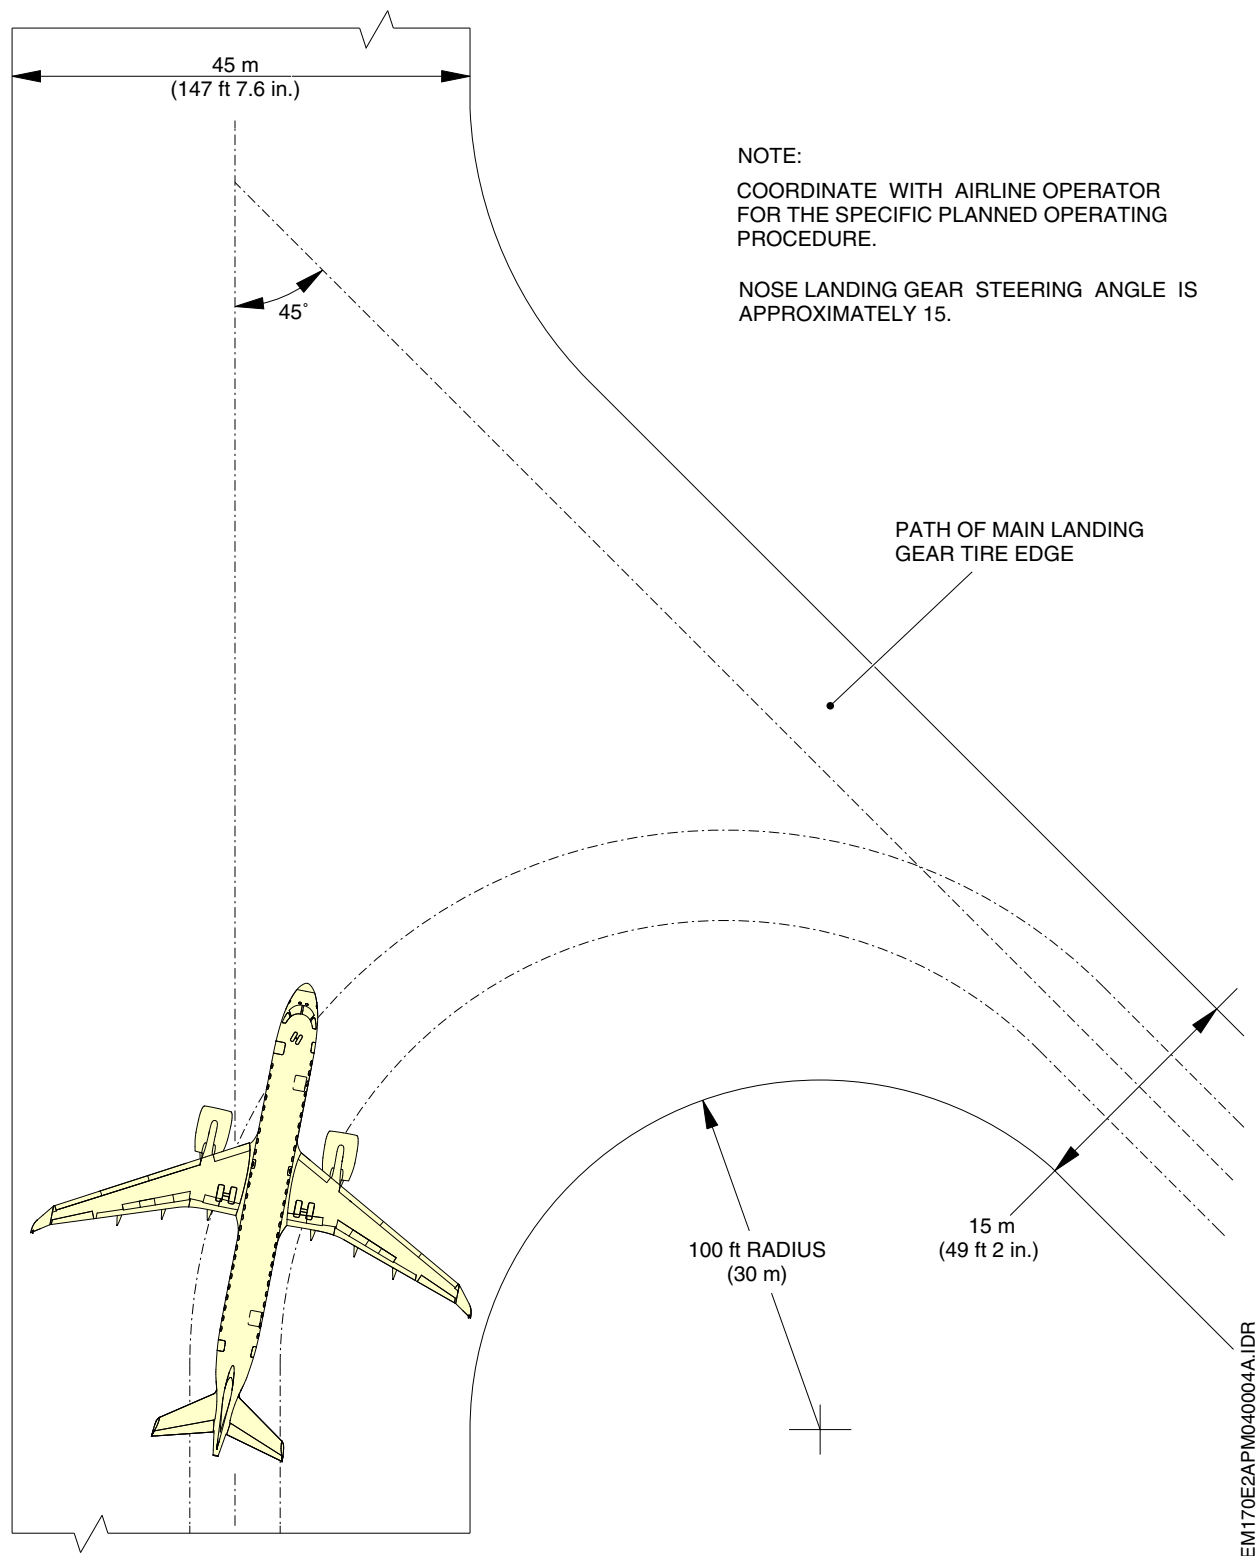

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT
90° Turn - Runway to Taxiway
Figure 4.7

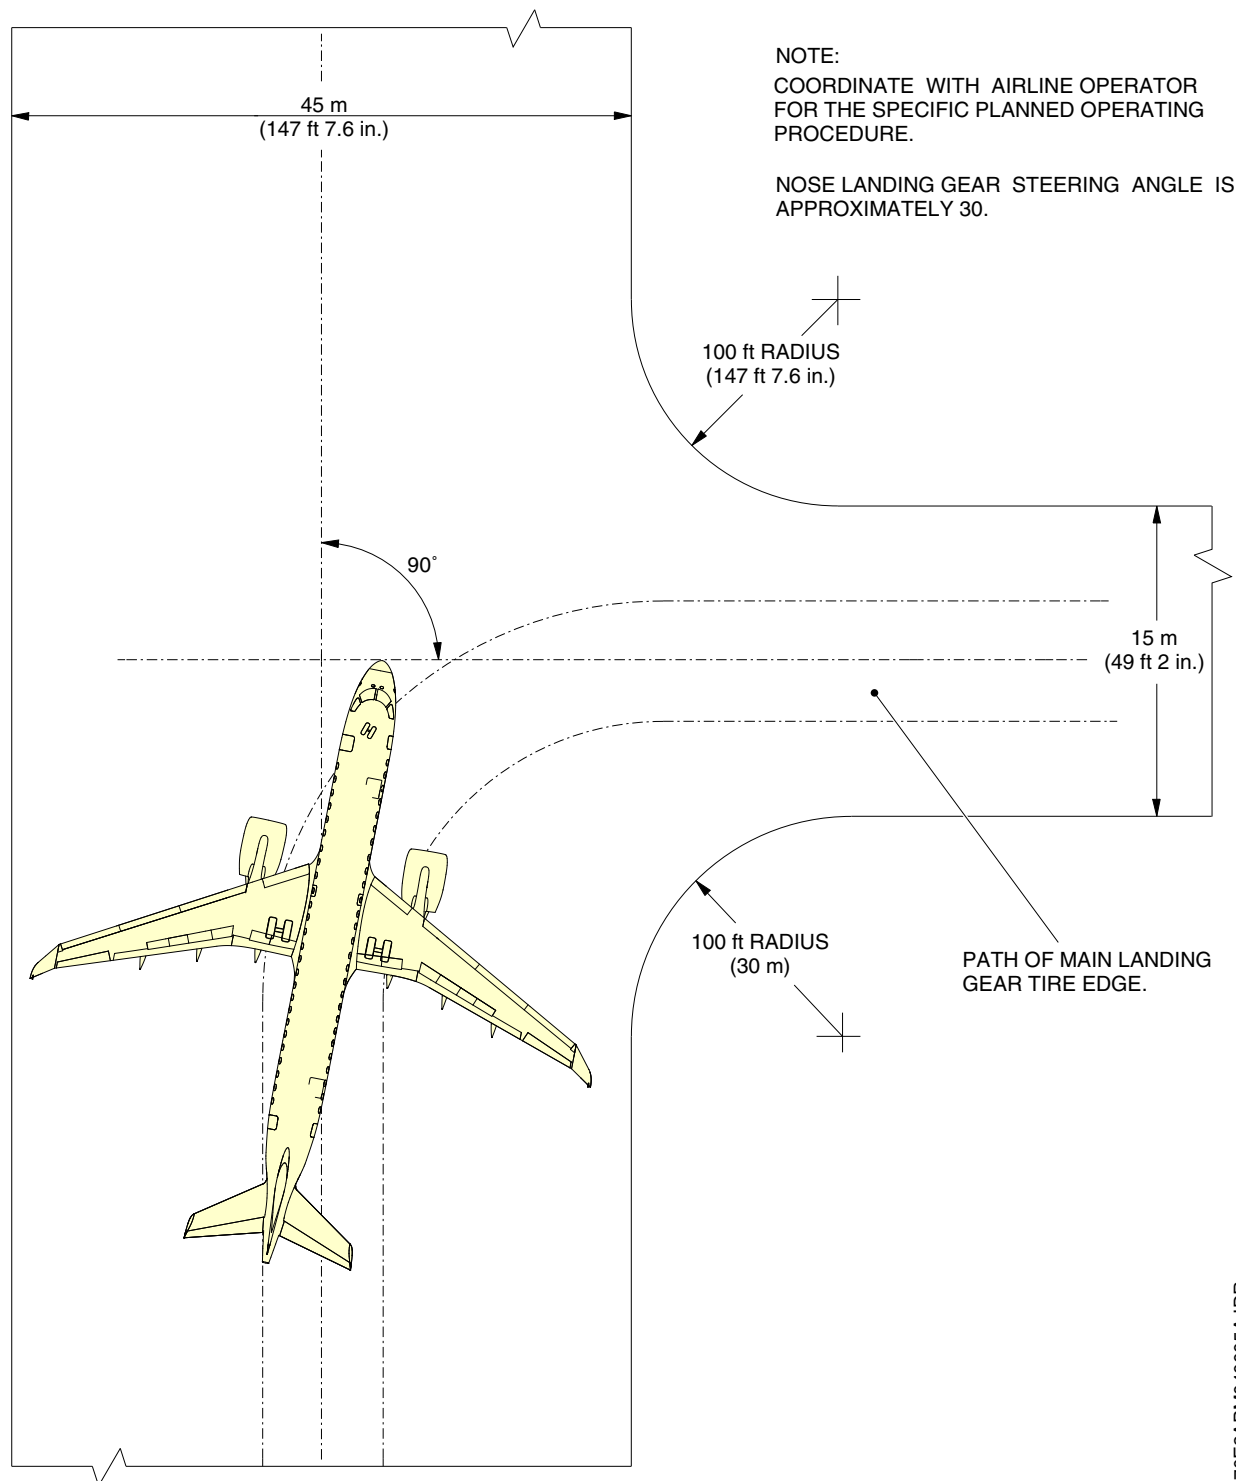


EM170E2APM040005A.IDR

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

90° Turn - Taxiway to Taxiway

Figure 4.8

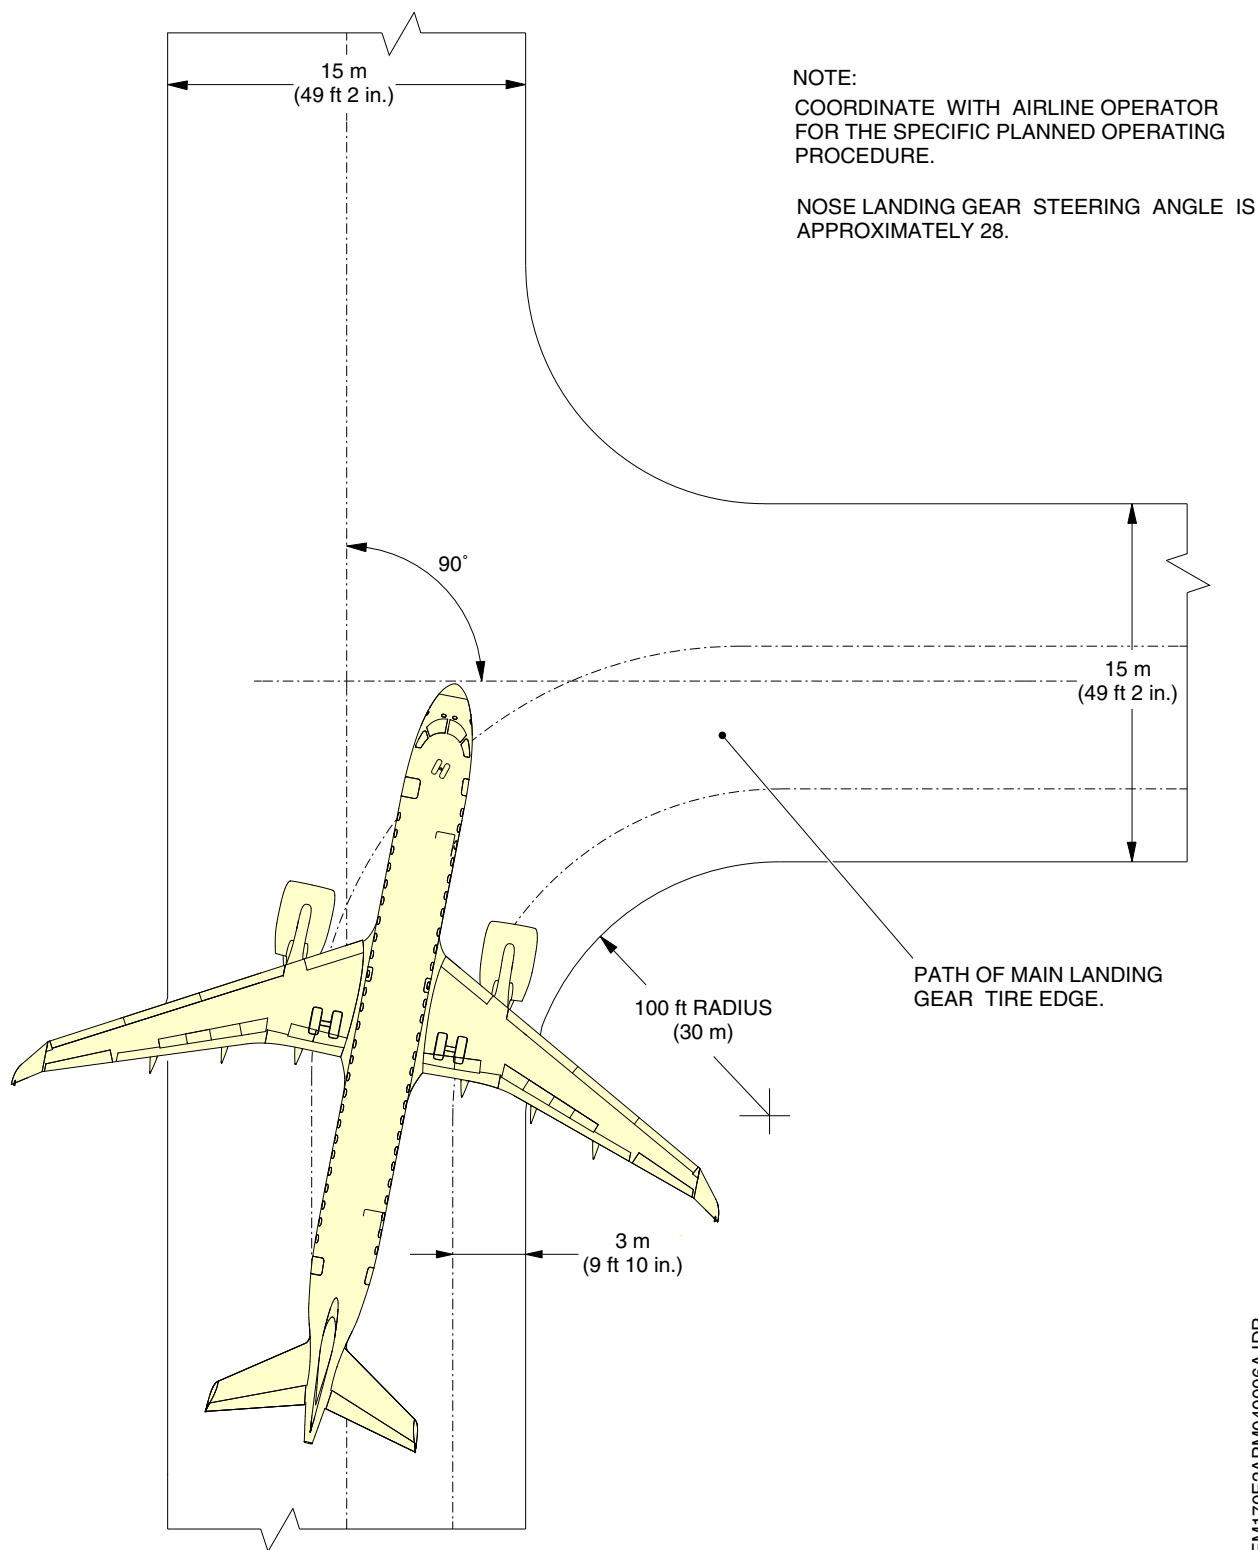


EM170E2APM040006A.IDR

4.6. RUNWAY HOLDING APRON

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

Runway Holding Bay

Figure 4.9

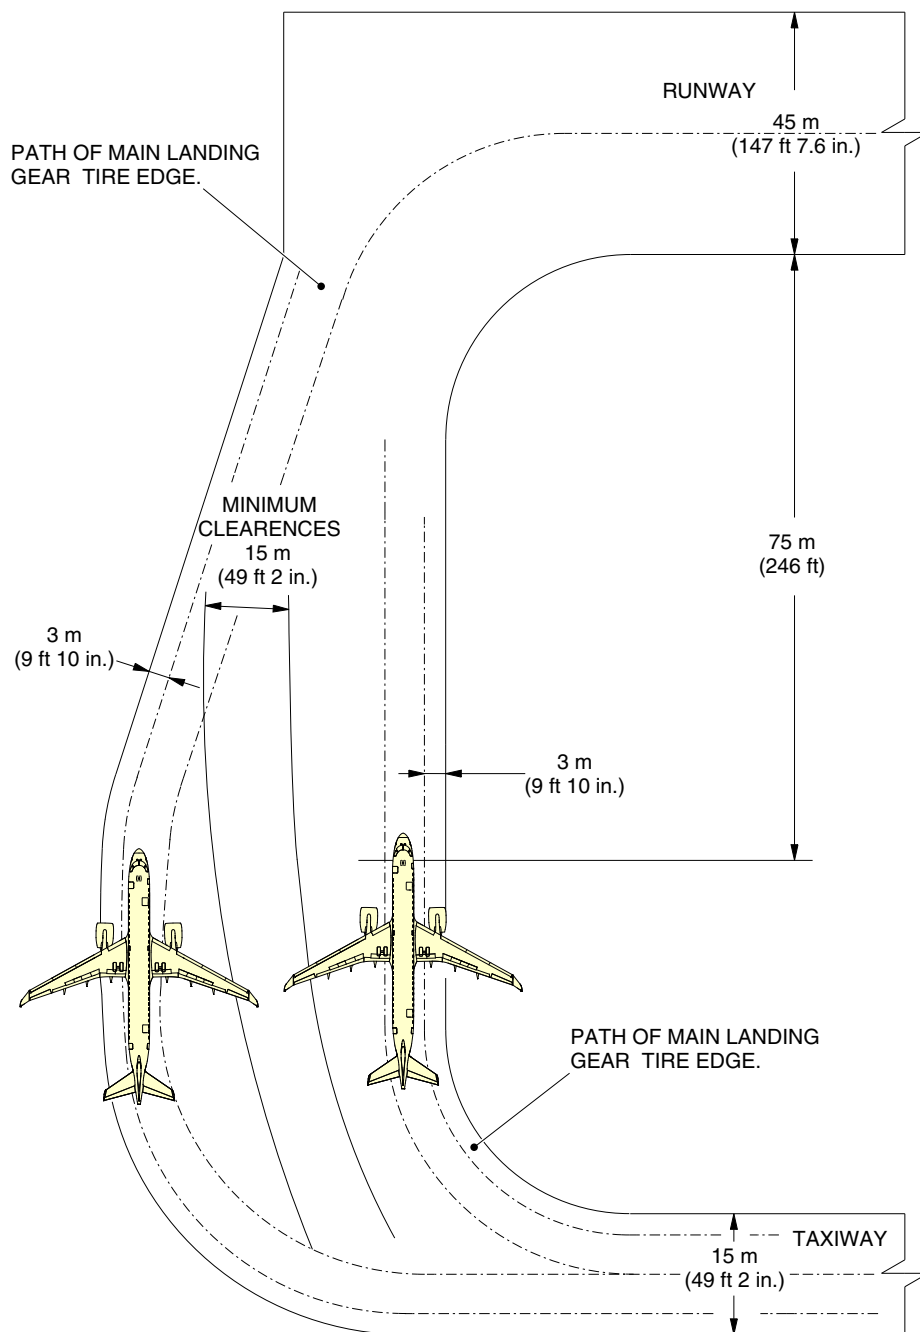

EM170E2APM040007A.IDR

5. **TERMINAL SERVICING**

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

5.1. **GENERAL INFORMATION**

During turnaround at the air terminal, certain services must be performed on the aircraft, usually within a given time to meet flight schedules. This section shows service vehicle arrangements, schedules, locations of servicing points, and typical servicing requirements. The data presented herein reflects ideal conditions for a single aircraft. Servicing requirements may vary according to the aircraft condition and airline operational (servicing) procedures.

This section provides the following information:

- The typical arrangements of equipment during turnaround;
- The typical turnaround servicing time at an air terminal;
- The locations of ground servicing connections in graphic and tabular forms;
- The typical sea level air pressure and flow requirements for starting the engine;
- The air conditioning requirements;
- The ground towing requirements for various towing conditions. Towbar pull and total traction wheel load may be determined by considering aircraft weight, pavement slope, coefficient of friction, and engine idle thrust.

5.2. **AIRCRAFT SERVICING ARRANGEMENT**




E-JETS E2

AIRPORT PLANNING MANUAL

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

Aircraft Servicing Arrangement With Passenger Stairs


Figure 5.1

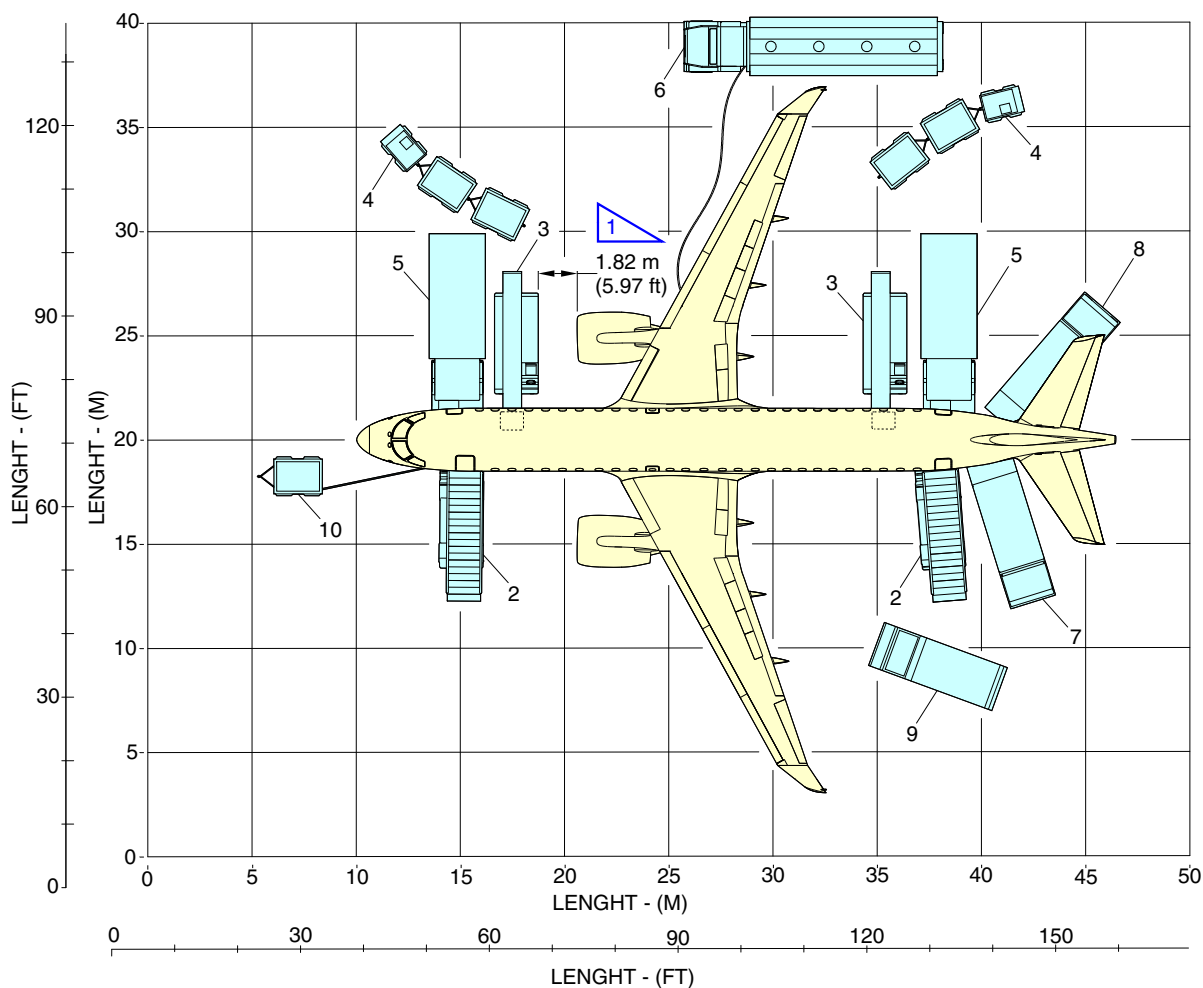

SERVICING ARRANGEMENT

- 2 - PASSENGER STAIR
- 3 - BAGGAGE LOADER
- 4 - BAGGAGE CARGO
- 5 - GALLEY SERVICE ADJUSTABLE RAMP
- 6 - FUEL SERVICE
- 7 - POTABLE WATER
- 8 - LAVATORY SERVICE
- 9 - CLEANING SERVICE
- 10 - GPU (GROUND POWER UNIT)

RAMP (REF)



5 - GALLEY SERVICE
ADJUSTABLE RAMP




FOR SAFE OPERATION, KEEP A MINIMUM DISTANCE OF 0.80 m (2.62 ft)

EM170E2APM050001A.IDR

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT


Aircraft Servicing Arrangement With Passenger Bridge (Galley Service Adjustable Ramp)

Figure 5.2

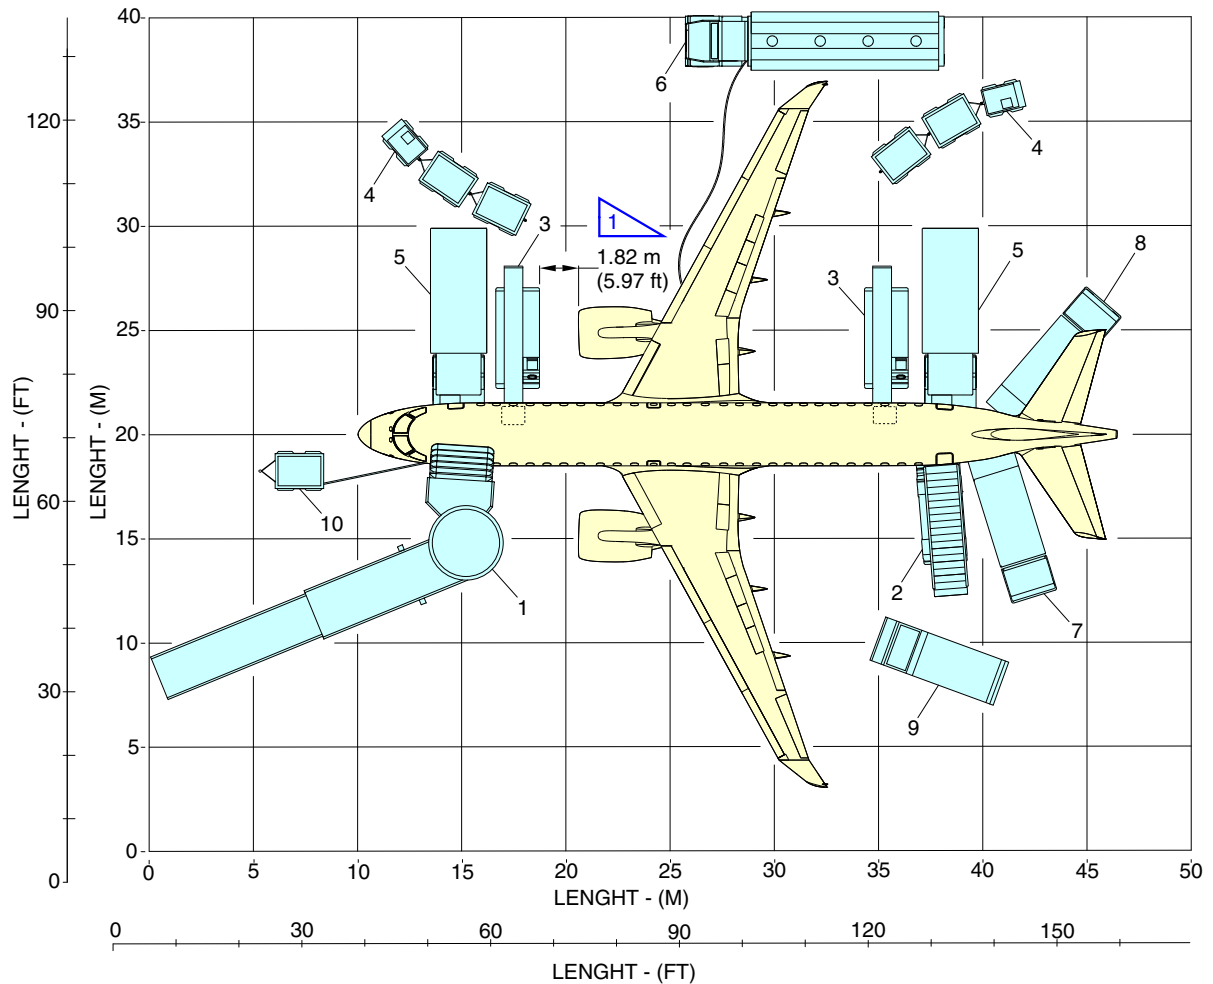

SERVICING ARRANGEMENT

- 1 - PASSENGER BRIDGE
- 2 - PASSENGER STAIR
- 3 - BAGGAGE LOADER
- 4 - BAGGAGE CARGO
- 5 - GALLEY SERVICE ADJUSTABLE RAMP
- 6 - FUEL SERVICE
- 7 - POTABLE WATER
- 8 - LAVATORY SERVICE
- 9 - CLEANING SERVICE
- 10 - GPU (GROUND POWER UNIT)

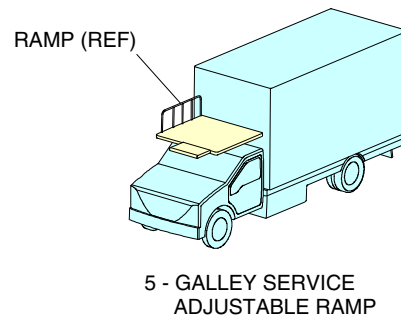


 FOR SAFE OPERATION, KEEP A MINIMUM DISTANCE OF 0.80 m (2.62 ft)



EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT


Aircraft Servicing Arrangement With Passenger Bridge (Galley Service Adjustable Left Ramp)

Figure 5.3

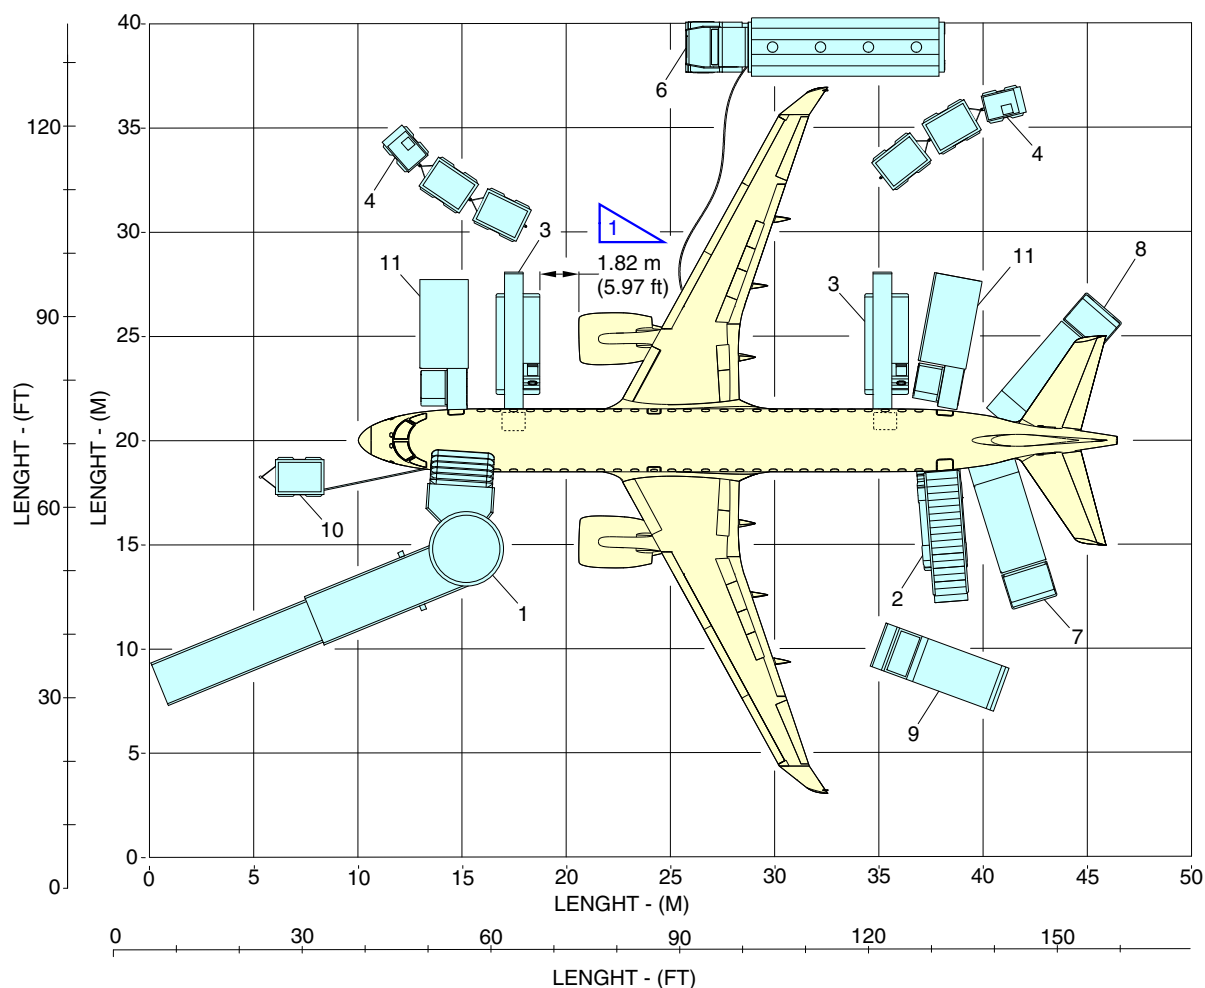

SERVICING ARRANGEMENT

- 1 - PASSENGER BRIDGE
- 2 - PASSENGER STAIR
- 3 - BAGGAGE LOADER
- 4 - BAGGAGE CARGO
- 6 - FUEL SERVICE
- 7 - POTABLE WATER
- 8 - LAVATORY SERVICE
- 9 - CLEANING SERVICE
- 10 - GPU (GROUND POWER UNIT)
- 11 - GALLEY SERVICE ADJUSTABLE LEFT RAMP

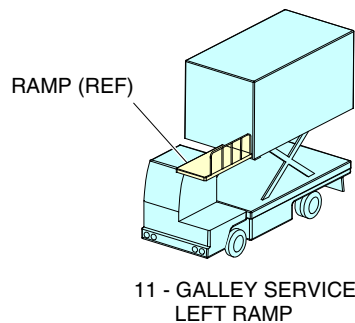


1 FOR SAFE OPERATION, KEEP A MINIMUM DISTANCE OF 0.80 m (2.62 ft)

EM170E2APM050010A.IDR

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT


Aircraft Servicing Arrangement With Passenger Bridge (Galley Service Adjustable Right Ramp)

Figure 5.4

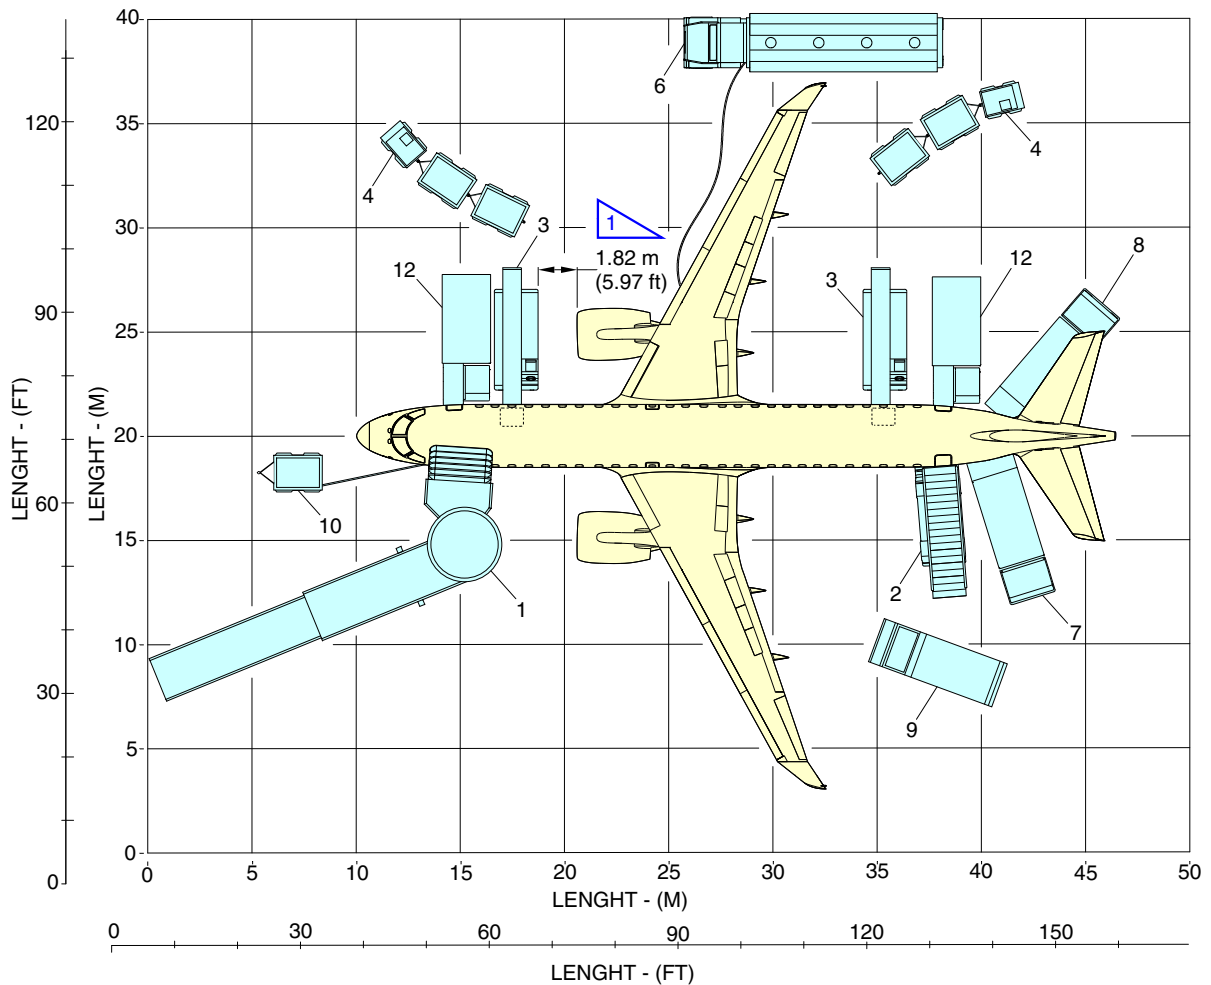

SERVICING ARRANGEMENT

- 1 - PASSENGER BRIDGE
- 2 - PASSENGER STAIR
- 3 - BAGGAGE LOADER
- 4 - BAGGAGE CARGO
- 6 - FUEL SERVICE
- 7 - POTABLE WATER
- 8 - LAVATORY SERVICE
- 9 - CLEANING SERVICE
- 10 - GPU (GROUND POWER UNIT)
- 12 - GALLEY SERVICE ADJUSTABLE RIGHT RAMP

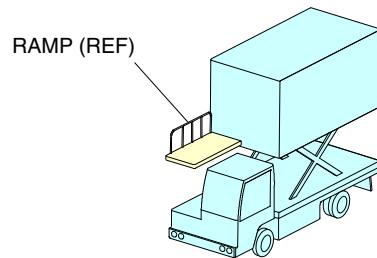

12 - GALLEY SERVICE
RIGHT RAMP

 FOR SAFE OPERATION, KEEP A MINIMUM DISTANCE OF 0.80 m (2.62 ft)

5.3. **TERMINAL OPERATIONS - TURNAROUND STATION**

This section presents the typical turnaround servicing time at an air terminal. The chart gives typical schedules for performing servicing on the aircraft within a given time.


The time of each service in the chart was calculated taking the following into consideration:

- Load factor - 100%;
- Passenger deplane - 24 pax/min;
- Passenger enplane - 16 pax/min;
- Baggages checked per passenger - 1,2;
- Refuel (fuel quantity) - 80%;
- Flow - 290 gpm;
- Potable water - 70% to be refilled (56 ℓ);
- Galley service FWD and aft sequence - in parallel;
- Toilet type - vacuum;
- Baggages unloading/loading FWD/aft sequence - in parallel;
- Only FWD passenger door to be used to deplane and enplane passengers.

Servicing times can be rearranged to suit availability of personnel, aircraft configuration, and degree of servicing required.

The data illustrates the general scope and tasks involving airport terminal operations. Airline-specific practices and operating experience will result in different sequences and intervals.

EFFECTIVITY: EMBRAER 190-E2 ACFT
Air Terminal Operation - Turnaround Station
Figure 5.5

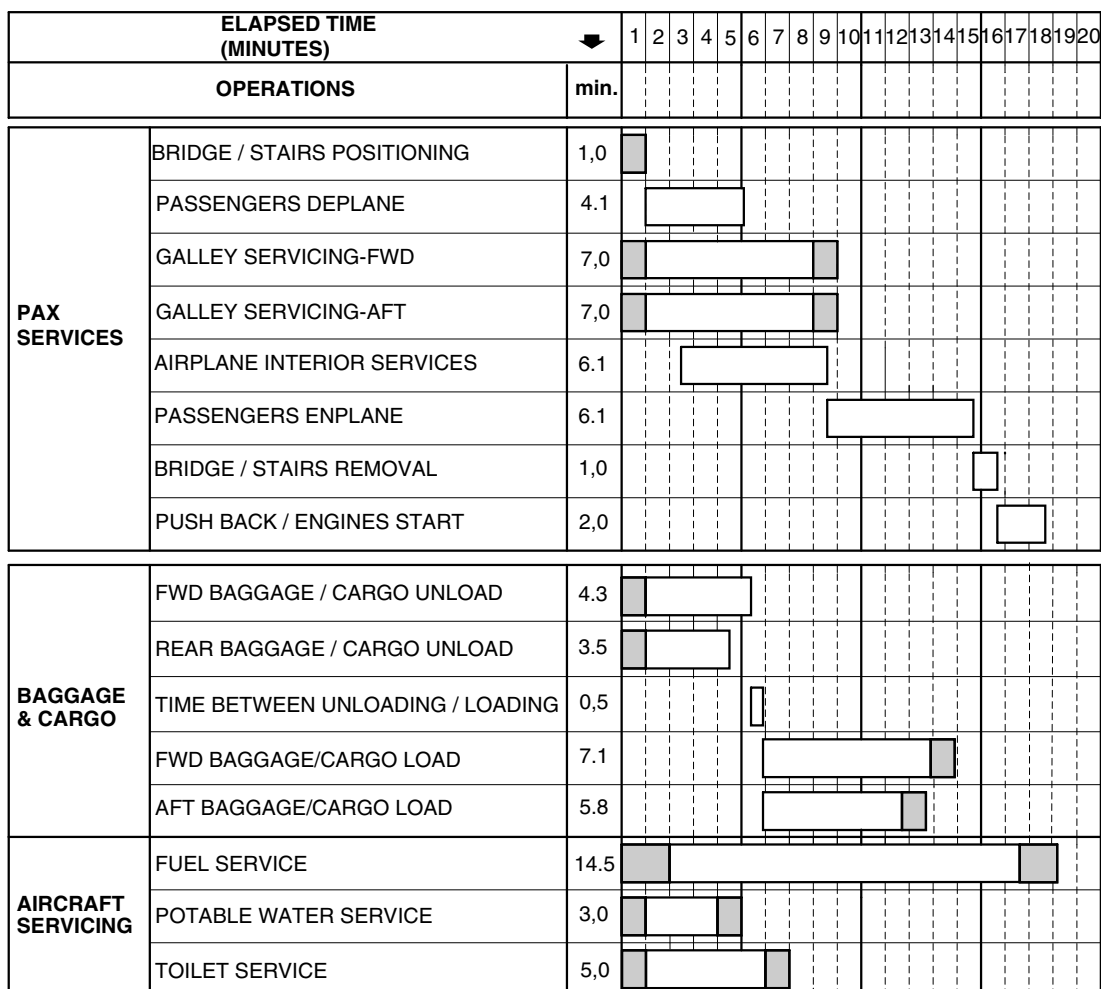

LEGEND:


 TRUCK POSITIONING/REMOVAL/SETTINGS

NOTE:

THIS DATA ILUSTRATES THE GENERAL SCOPE AND TASKS INVOLVING AIRPORT TERMINAL OPERATIONS. AIRLINE PARTICULAR PRACTICES AND OPERATING EXPERIENCE WILL RESULT IN DIFFERENT SEQUENCES AND INTERVALS.

EM170E2APM050003B.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
Air Terminal Operation - Turnaround Station
Figure 5.6

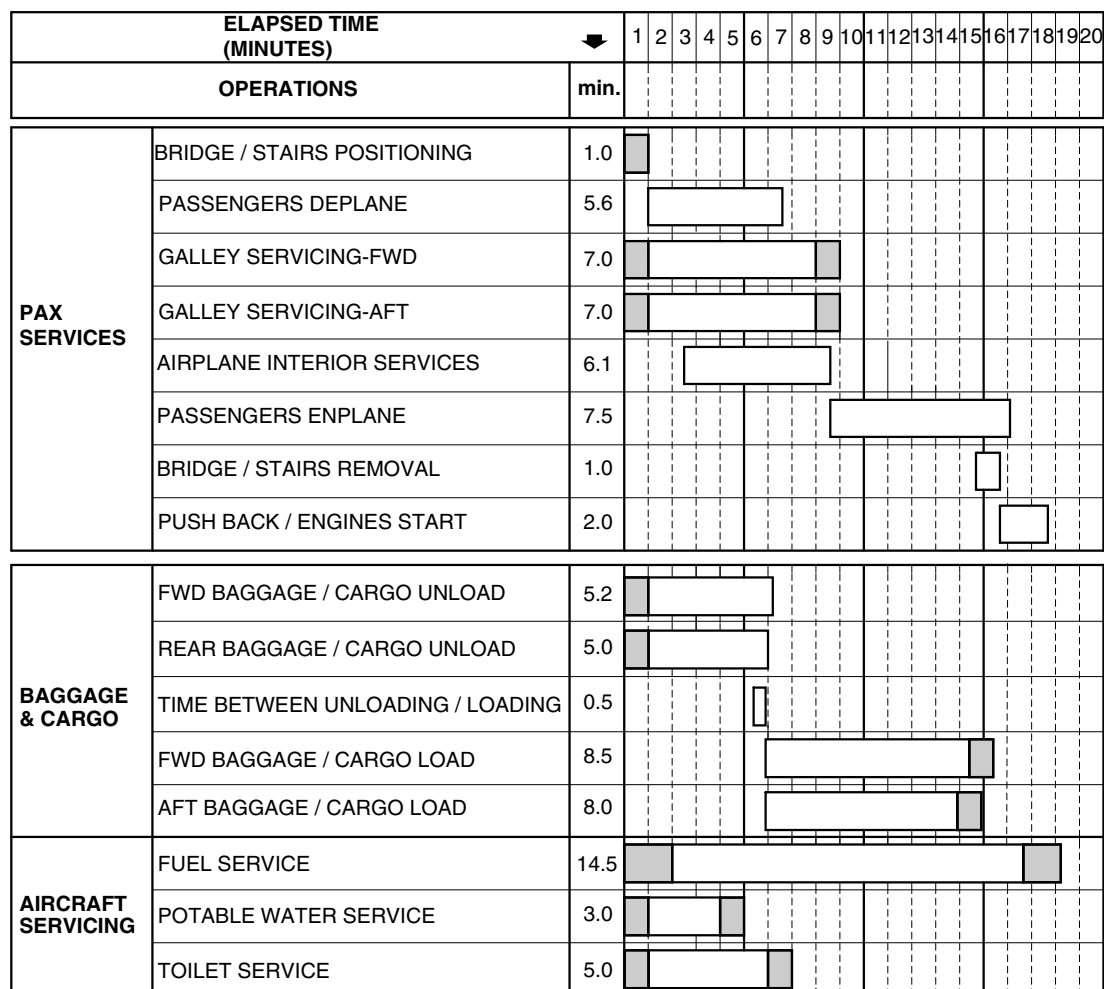

LEGEND:

 TRUCK POSITIONING / REMOVAL / SETTINGS

NOTE:

THIS DATA ILLUSTRATES THE GENERAL SCOPE AND TASKS INVOLVING AIRPORT TERMINAL OPERATIONS. AIRLINE PARTICULAR PRACTICES AND OPERATING EXPERIENCE WILL RESULT IN DIFFERENT SEQUENCES AND INTERVALS.

EM170E2APM050012B.IDR

5.4. **TERMINAL OPERATIONS - EN ROUTE STATION**

Not Applicable


5.5. **GROUND SERVICING CONNECTIONS**



EFFECTIVITY: EMBRAER 190-E2 ACFT

Ground Servicing Connections

Figure 5.7

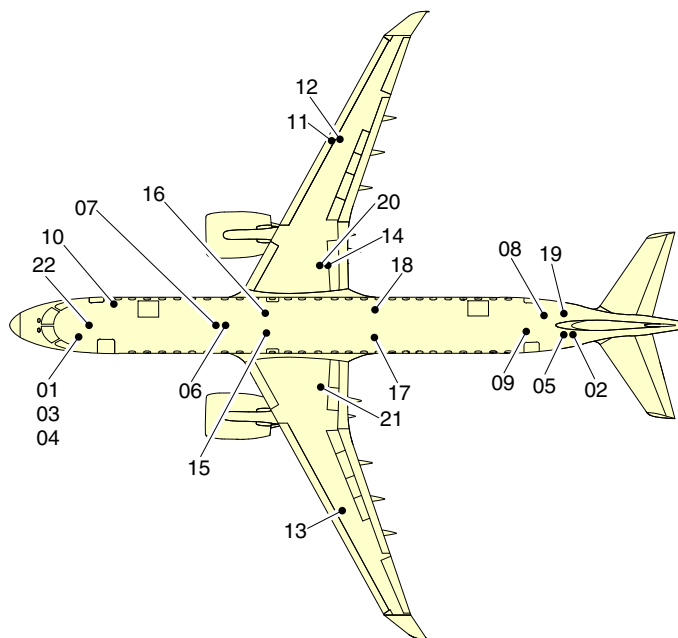

ITEM	DESCRIPTION	HEIGHT ABOVE GROUND (mm)
1	FWD RAMP HEADSET	1944
2	REAR RAMP HEADSET	3092
3	STEERING DISCONNECT SWITCH	830
4	EXTERNAL POWER SUPPLY 115 VAC	1935
5	EXTERNAL POWER SUPPLY 28 VDC	3065
6	ENGINE AIR STARTING	1370
7	AIR CONDITIONING LOW PRESSURE	1373
8	WASTE SERVICING PANEL	2660
9	POTABLE WATER SERVICING PANEL	2680
10	OXYGEN REFILL / REPLACE BOTTLE	2411
11	PRESSURE REFUELING / DEFUELING	3250
12	RIGHT GRAVITY FUEL PORT	3460
13	LEFT GRAVITY FUEL PORT	3460
14	GROUNDING POINT (RIGHT MLG)	1976
15	LEFT FUEL DRAIN VALVE	1825
16	RIGHT FUEL DRAIN VALVE	1825
17	HYDRAULIC SYS 1 SERVICING PANEL	1816
18	HYDRAULIC SYS 2 SERVICING PANEL	1816
19	HYDRAULIC SYS 3 SERVICING PANEL	3614
20	RIGHT MLG WHEEL JACKING POINT	522
21	LEFT MLG WHEEL JACKING POINT	522
22	NLG WHEEL JACKING POINT	280

NOTE:


THE GROUND CLEARANCES IN THE TABLE REFER TO THE AIRCRAFT WITH THE MINIMUM OPERATING WEIGHT (MOW), CGF, 20 °C.

EM170E2APM050004C.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT

Ground Servicing Connections

Figure 5.8

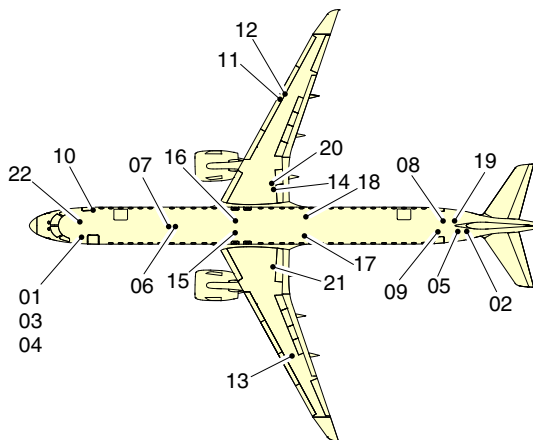

ITEM	DESCRIPTION	HEIGHT ABOVE GROUND (mm)
1	FWD RAMP HEADSET	1944
2	REAR RAMP HEADSET	3161
3	STEERING DISCONNECT SWITCH	944
4	EXTERNAL POWER SUPPLY 115 VAC	1935
5	EXTERNAL POWER SUPPLY 28 VDC	3142
6	ENGINE AIR STARTING	1201
7	AIR CONDITIONING LOW PRESSURE	1433
8	WASTE SERVICING PANEL	2644
9	POTABLE WATER SERVICING PANEL	2455
10	OXYGEN REFILL / REPLACE BOTTLE	2376
11	PRESSURE REFUELING / DEFUELING	3240
12	RIGHT GRAVITY FUEL PORT	3499
13	LEFT GRAVITY FUEL PORT	3499
14	GROUNDING POINT (RIGHT MLG)	2007
15	LEFT FUEL DRAIN VALVE	1862
16	RIGHT FUEL DRAIN VALVE	1862
17	HYDRAULIC SYS 1 SERVICING PANEL-197DL	1847
	HYDRAULIC SYS 1 SERVICING PANEL-197FL	2416
18	HYDRAULIC SYS 2 SERVICING PANEL-198DR	1817
	HYDRAULIC SYS 2 SERVICING PANEL-198FR	2392
19	HYDRAULIC SYS 3 SERVICING PANEL-314AR	3177
	HYDRAULIC SYS 3 SERVICING PANEL-314BR	3935
20	RIGHT MLG WHEEL JACKING POINT	522
21	LEFT MLG WHEEL JACKING POINT	522
22	NLG WHEEL JACKING POINT	280

NOTE:

THE GROUND CLEARANCES IN THE TABLE REFER TO THE AIRCRAFT WITH THE MINIMUM OPERATING WEIGHT (MOW), CGF, 20 °C.

EM170E2APM050016A.IDR



5.6. ENGINE STARTING PNEUMATIC REQUIREMENTS

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

Engine Starting Pneumatic Requirements

Figure 5.9

TABLE 1 - PNEUMATIC ENGINE START REQUIREMENTS

Altitude (ft)	Ambient Temp (°F)	Minimum Pressure (psia)	Minimum Temp (°F)	Minimum Flow (lb/min)
SL	-40	48.0	349	95.1
SL	59	43.7	443	82.0
SL	120	40.7	505	73.7
9000	-40	37.7	350	74.5
9000	23	30.0	409	57.3
9000	86	28.9	474	53.4
13,000	-40	36.0	352	71.3
13,000	12	27.2	399	52.2
13,000	71	26.7	458	49.6
15,000	-40	32.9	352	66.6
15,000	5	25.3	392	49.0
15,000	59	24.4	446	46.1

EM170E2APM050006A.IDR




5.7. GROUND PNEUMATIC POWER REQUIREMENTS

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

Ground Pneumatic Power Requirements

Figure 5.10

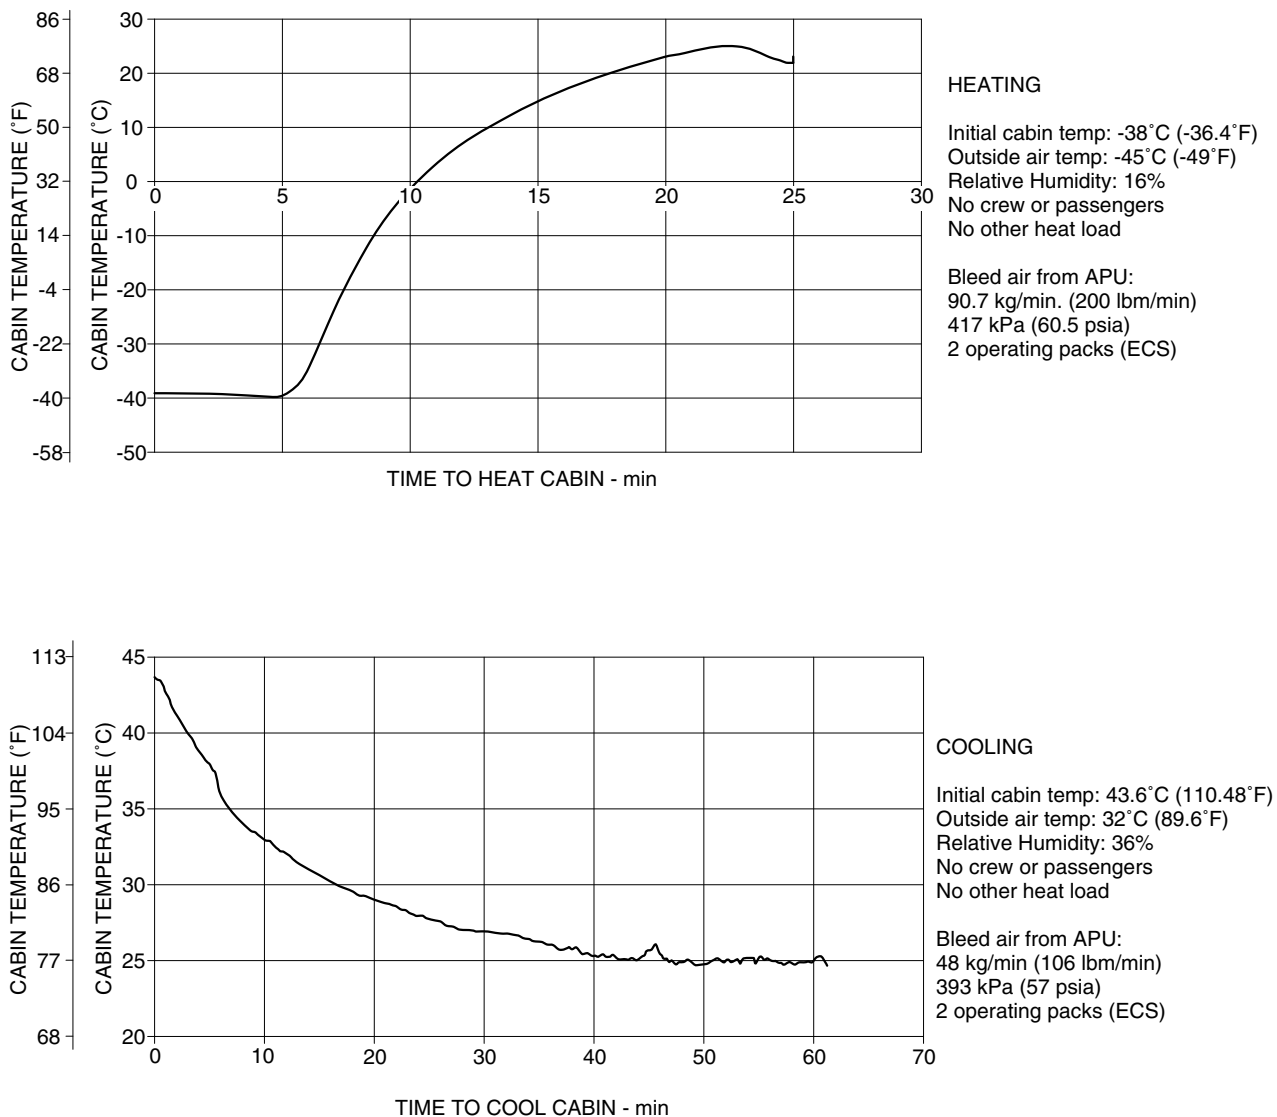

EM170E2APM050014A.IDR



5.8. **PRECONDITIONED AIRFLOW REQUIREMENTS**


This subsection presents the following information:

- The air conditioning requirements for heating and cooling using ground conditioned air. The curves show airflow requirements to heat or cool the aircraft for the period of time that will be necessary at ambient conditions.
- The air conditioning requirements for heating and cooling to keep a constant cabin air temperature using low-pressure conditioned air. This conditioned air is supplied through a ground connection air directly to the passenger cabin, bypassing the aircraft's air conditioning cooling packs.

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

Preconditioned Airflow Requirements

Figure 5.11

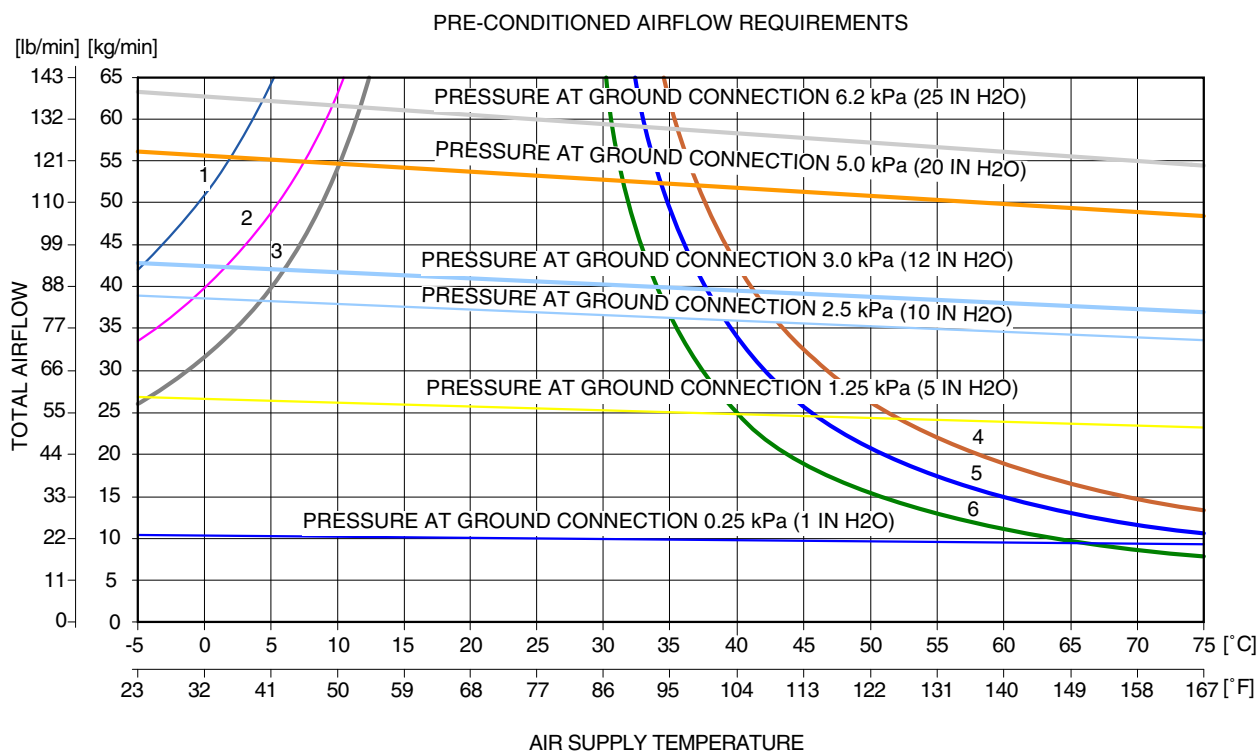

LEGEND:


- CASE 1 - CABIN AT 24°C (75.2°F), 124 OCCUPANTS, BRIGHT DAY (SOLAR IRRADIATION), 39°C (102.2°F) DAY.
- CASE 2 - CABIN AT 27°C (80.6°F), 124 OCCUPANTS, BRIGHT DAY (SOLAR IRRADIATION), 39°C (102.2°F) DAY.
- CASE 3 - CABIN AT 24°C (75.2°F), 4 CREW MEMBERS, BRIGHT DAY (SOLAR IRRADIATION), 39°C (102.2°F) DAY.
- CASE 4 - CABIN AT 24°C (75.2°F), NO CABIN OCCUPANTS, FOUR CREW MEMBERS ONLY, OVERCAST DAY (NO SOLAR IRRADIATION), -40°C (-40°F) DAY.
- CASE 5 - CABIN AT 24°C (75.2°F), NO CABIN OCCUPANTS, FOUR CREW MEMBERS ONLY, OVERCAST DAY (NO SOLAR IRRADIATION), -29°C (-20.2°F) DAY.
- CASE 6 - CABIN AT 24°C (75.2°F), NO CABIN OCCUPANTS, FOUR CREW MEMBERS ONLY, OVERCAST DAY (NO SOLAR IRRADIATION), -18°C (-0.4°F) DAY.
- STATIC PRESSURE AT GROUND CONNECTION - 0.25 kPa (1 IN H₂O)
- STATIC PRESSURE AT GROUND CONNECTION - 1.25 kPa (5 IN H₂O)
- STATIC PRESSURE AT GROUND CONNECTION - 2.5 kPa (10 IN H₂O)
- STATIC PRESSURE AT GROUND CONNECTION - 3.0 kPa (12 IN H₂O)
- STATIC PRESSURE AT GROUND CONNECTION - 5.0 kPa (20 IN H₂O)
- STATIC PRESSURE AT GROUND CONNECTION - 6.2 kPa (25 IN H₂O)

EM170E2APM050015A.IDR



5.9. GROUND TOWING REQUIREMENTS


EFFECTIVITY: EMBRAER 190-E2 ACFT
Ground Towing Requirements
Figure 5.12

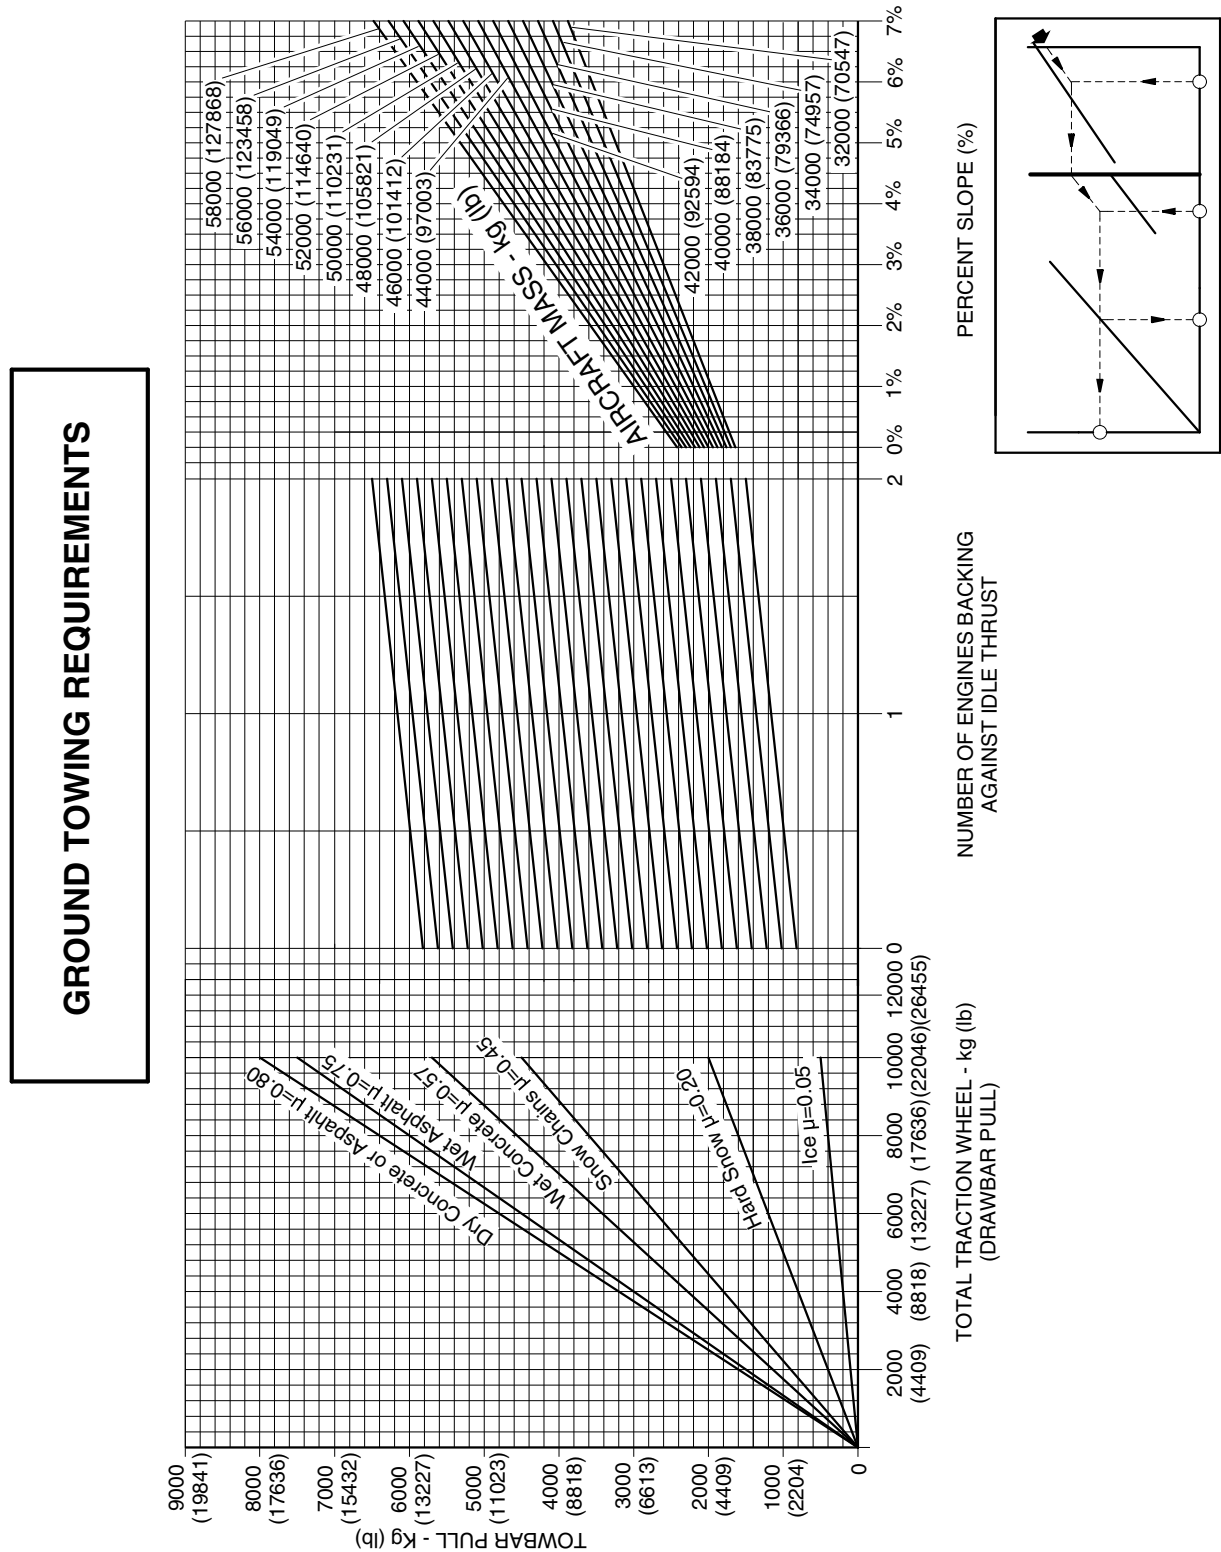



EFFECTIVITY: EMBRAER 195-E2 ACFT
Ground Towing Requirements
Figure 5.13

GROUND TOWING REQUIREMENTS

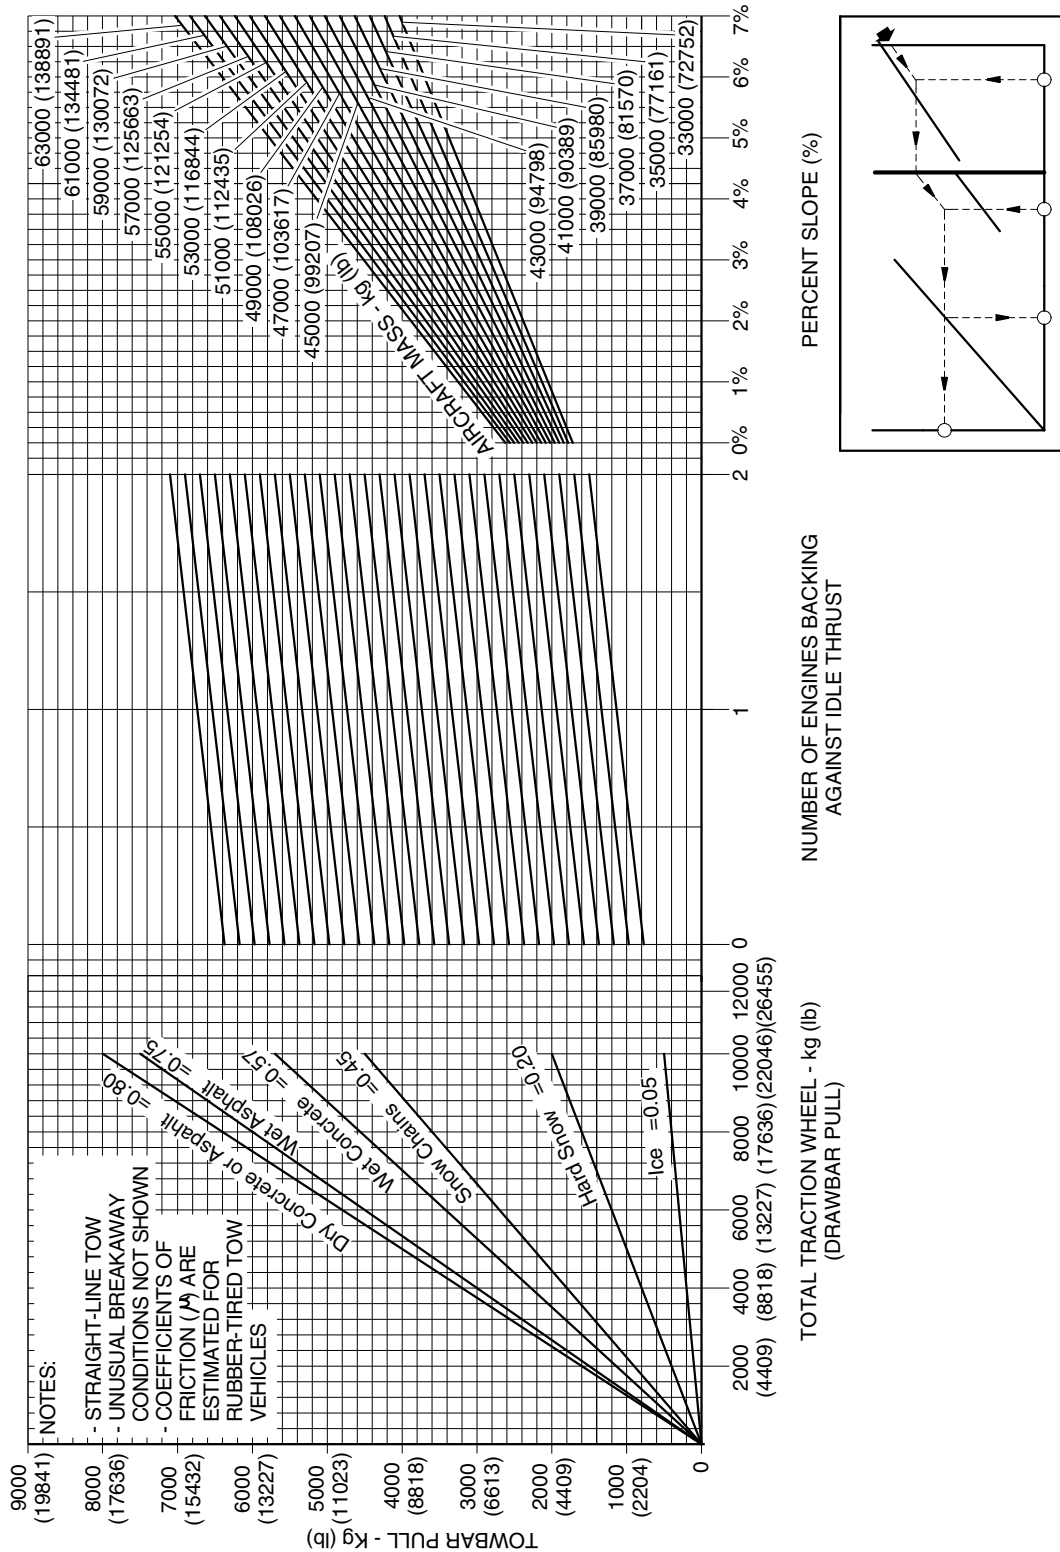

EM170E2APM050017A.IDR

6. OPERATION CONDITIONS

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

6.1. OPERATING CONDITIONS

This section provides the following information:


- The jet engine exhaust velocities;
- The airport and community noise levels;
- The hazard areas.
- The breakaway exhaust temperature/velocity plot;

6.2. ENGINE EXHAUST VELOCITIES

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

Jet Wake Velocity Profile - Ground Idle and Maximum Takeoff Power

Figure 6.1

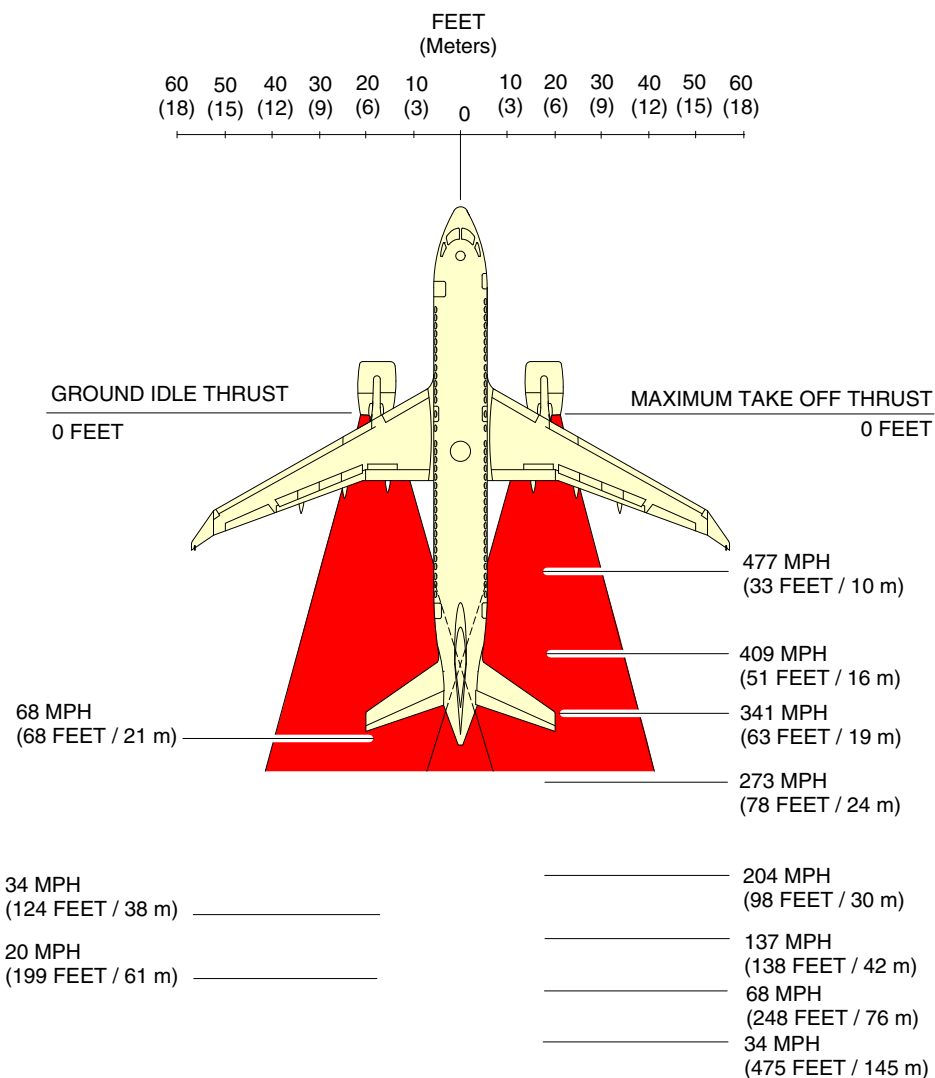

NOTE:
CONVERSION FACTOR:
1 MPH = 1.6 Km/Hr

EM170E2APM060008A.IDR

6.3. **AIRPORT AND COMMUNITY NOISE**

Aircraft noise is a major concern for the airport and community planner. The airport is a basic element in the community's transportation system and, thus, is vital to its growth. However, the airport must also be a good neighbor, and this is only possible with proper planning. Since aircraft noise extends beyond the boundaries of the airport, it is vital to consider the noise impact on the surrounding communities.

Many means have been devised to provide the planner with a tool to estimate the impact of airport operations. Too often they oversimplify noise to the point where the results become erroneous. Noise is not a simple matter; therefore, there are no simple answers.

The cumulative noise contour is an effective tool. However, care must be taken to ensure that the contours, used correctly, estimate the noise resulting from aircraft operations conducted at an airport.

The size and shape of the single-event contours, which are inputs into the cumulative noise contours, are dependent upon numerous factors. They include operational factors (aircraft weight, engine power setting, airport altitude), atmospheric conditions (wind, temperature, relative humidity, surface condition), and terrain.

6.3.1. External Certification Noise Levels

The aircraft complies with the following noise certification requirements:

- ANAC RBAC 36 Amendment 28 corresponding to 14 CFR Part 36, incorporating Amendments 36-1 throughout 36-28
- 14 CFR Part 36, Amendment 36-1 to 36-29
- ICAO Annex 16, Volume 1, Chapter 4, Amendment 11-B

6.3.2. Ramp Noise Levels

The aircraft APU operation complies with the noise limits as defined in ICAO Annex 16, Vol. 1, Chapter 9, Attachment C, sixth edition, effective 17th November 2011.

With the normal operation of APU, environmental control system (ECS), equipment cooling fans and ventilation fans, in any combination, corresponding to outside air temperatures up to 25 °C and with measurement positions as defined in ICAO Annex 16, Vol. 1, Chapter 9, Attachment C, sixth edition, effective 17th November 2011:

- The A-weighted sound levels at the FWD passenger and FWD service doors must not be more than 75 dBA.
- The A-weighted sound levels at the fuel servicing point, GPU connection point and rear passenger door must not be more than 80 dBA.
- The A-weighted sound levels at the FWD and rear cargo doors, lavatory servicing point and rear service door must not be more than 85 dBA.
- The A-weighted sound levels on a rectangular perimeter 20 meter from the aircraft centerline, nose and tail must not be more than 80 dBA.


6.4. **HAZARD AREAS**



EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

Hazard Areas - Ground Idle and Takeoff Power

Figure 6.2

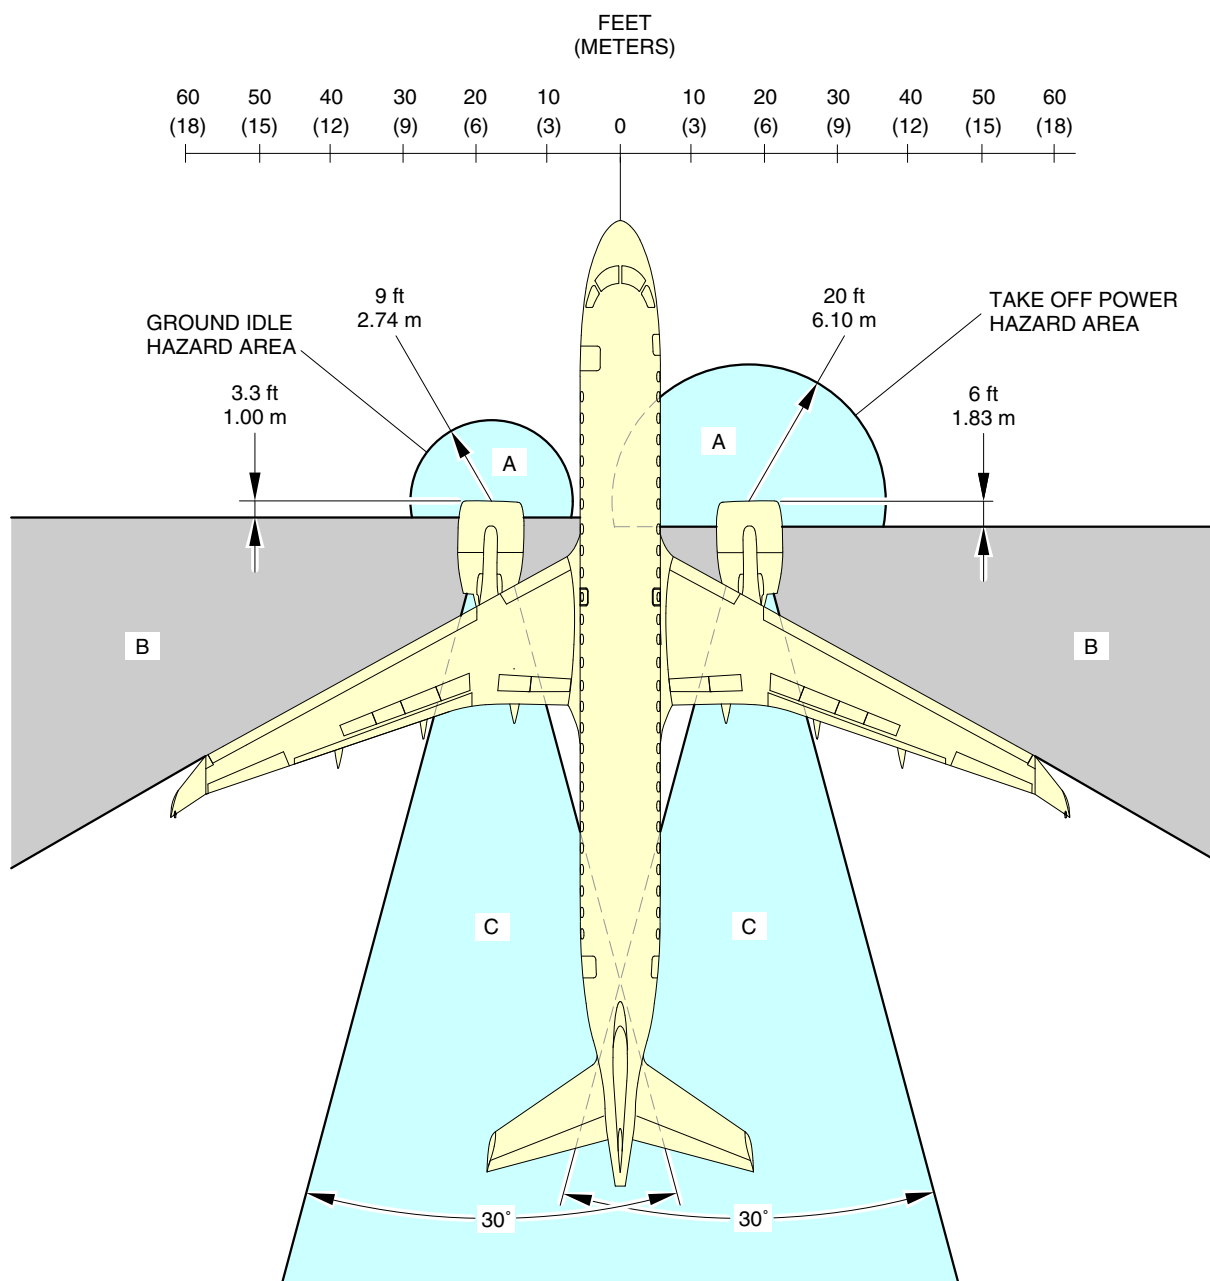

LEGEND:

AREA A - INTAKE SUCTION DANGER AREA

AREA B - ENTRY CORRIDOR


AREA C - EXHAUST DANGER AREA (AFT OF EXHAUST NOZZLE):
240 ft (73.15 m) - GROUND IDLE (20 kt HEADWIND)
550 ft (167.64 m) - TAKE OFF POWER (20 kt HEADWIND)

EM170E2APM060007B.IDR

6.5. BREAKAWAY EXHAUST TEMPERATURE/VELOCITY PLOT



EFFECTIVITY: EMBRAER 190-E2 ACFT
Breakaway Exhaust Temperature/Velocity Plot
Figure 6.3

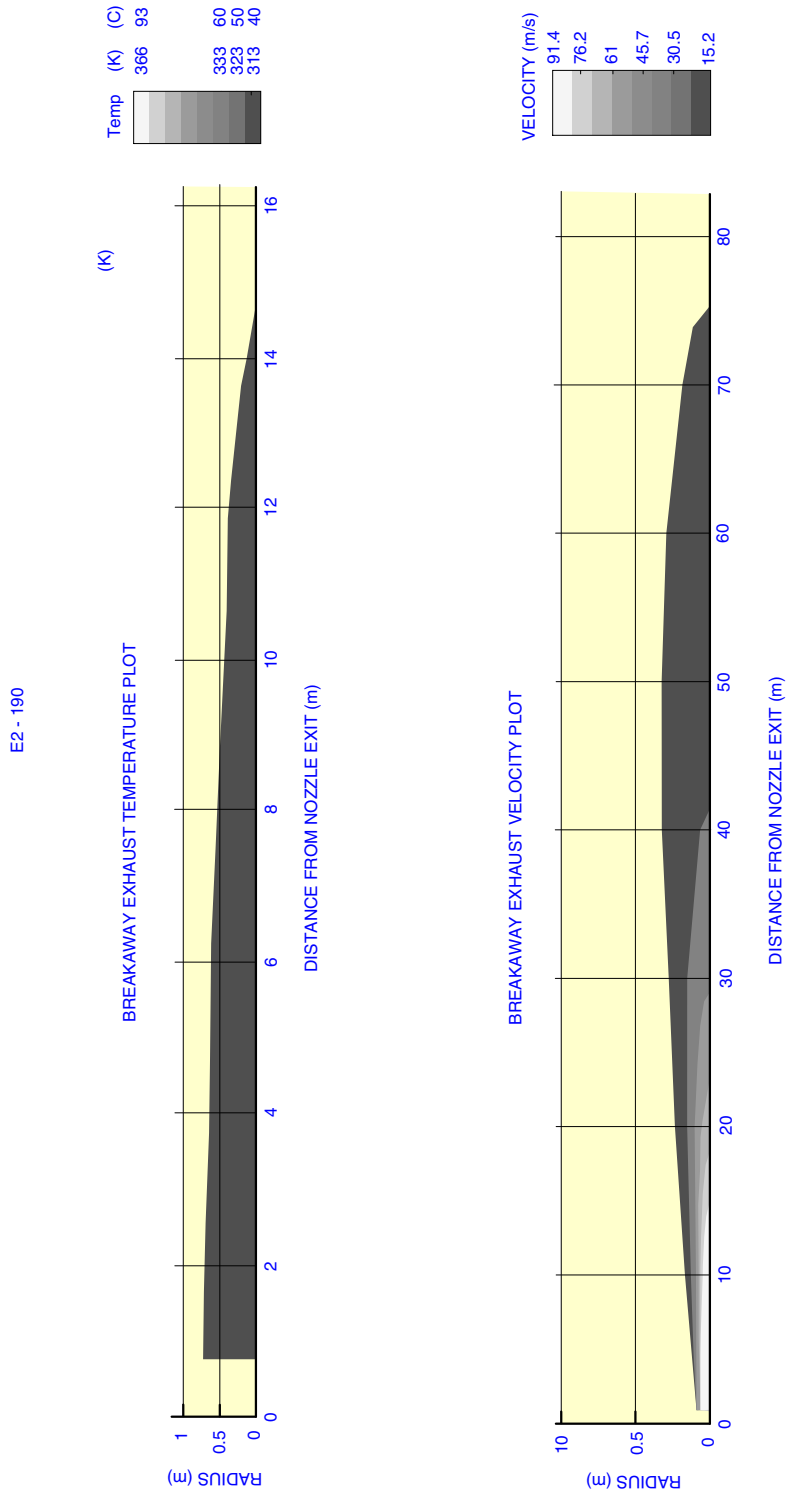


CONSIDERED CONDITIONS:
SEA LEVEL, STATIC CONDITIONS ($Mn=0.00$), STANDARD DAY, WITH NOMINAL RATED EXTRACTION AND DUAL SOURCE BLEED NOMINAL ECS (ALL ENGINES OPERATING)

EM170E2APM060012B.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
Breakaway Exhaust Temperature/Velocity Plot
Figure 6.4

E2 - 195

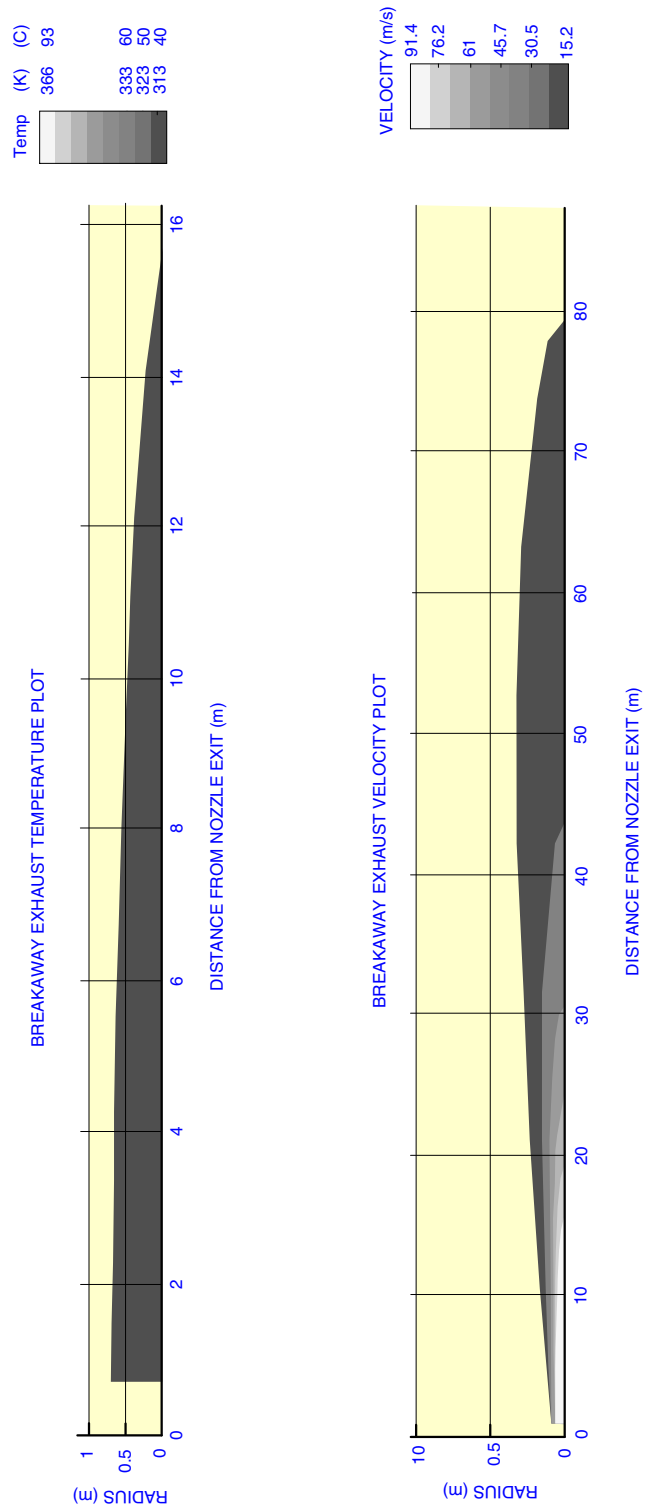

CONSIDERED CONDITIONS:
SEA LEVEL, STATIC CONDITIONS ($M_n=0.00$), STANDARD DAY, WITH NOMINAL RATED EXTRACTION AND DUAL SOURCE BLEED NOMINAL ECS (ALL ENGINES OPERATING)

EM170E2APM060013B.IDR



7. PAVEMENT DATA

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

7.1. GENERAL INFORMATION

Pavement is defined as a structure which has one or more layers of processed materials.

The primary function of a pavement is to distribute concentrated loads to prevent the supporting capacity of the subgrade soil from being exceeded. The subgrade soil is defined as the material on which the pavement rests, whether it is an embankment or excavation.

Several methods to the airport pavements design, with considerable differences in their approach, have been developed.

The design methods are derived from observation of pavements in service or experimental pavements. Thus, the reliability of any method is proportional to the amount of experimental verification behind the method, and all methods require a considerable amount of common sense and judgment on the part of the engineer who applies them.

A brief description of the following pavement charts will be helpful for their use for airport planning. Each aircraft configuration is depicted with a minimum range of five loads on the main landing gear to help in the interpolation between the discrete values shown. The tire pressure used for the aircraft charts will produce the recommended tire deflection with the aircraft loaded to its maximum ramp weight and with the center of gravity position. The tire pressure, where specifically designated in tables and on charts, are values obtained under loaded conditions as certificated for commercial use.

This section provides the information that follows:

- The basic data on the landing gear footprint configuration, maximum design ramp loads, and tire sizes and pressures.
- The maximum pavement loads for certain critical conditions at the tire-ground interfaces.
- A chart to determine the loads throughout the stability limits of the aircraft at rest on the pavement. Pavement requirements for commercial aircraft are generally determined from the static analysis of loads on the main landing gear struts. These main landing gear loads are used in the pavement design charts that follow, interpolating load values where necessary.
- The flexible pavement curves prepared in accordance with the US Army Corps of Engineers Design Method and LCN Method.
- The rigid pavement design curves in accordance with the Portland Cement Association Design Method and LCN Method.
- The aircraft AR values for flexible and rigid pavements.


7.2. FOOTPRINT

EFFECTIVITY: EMBRAER 190-E2 ACFT

Footprint

Figure 7.1

	AIRCRAFT MODEL (ERJ 190-300)
MAXIMUM RAMP WEIGHT	56600 kg (124781 lb)
NOSE GEAR TIRE SIZE	H27X8.5R12 16PR
NOSE GEAR TIRE PRESSURE	1.007 - 1.055 kPa (146 - 153 psi)
MAIN GEAR TIRE SIZE	H42X16.0R20 24PR
MAIN GEAR TIRE PRESSURE	1.082 - 1.131 kPa (157 - 164 psi)

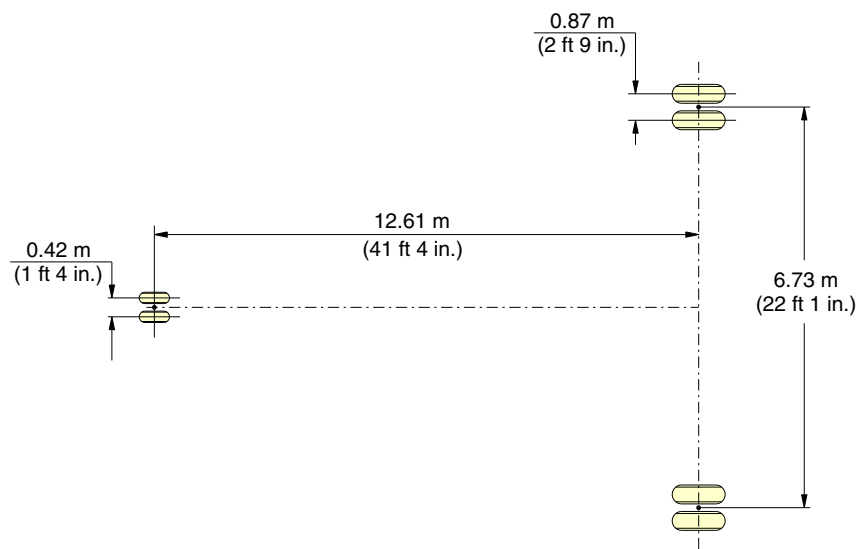


EM170E2APM070001B.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT

Footprint

Figure 7.2

	AIRCRAFT MODEL (E195-E2)
MAXIMUM RAMP WEIGHT	61715 kg (136058 lb)
NOSE GEAR TIRE SIZE	H27X8.5R12 16PR
NOSE GEAR TIRE PRESSURE	965.3 - 1.013 kPa (140 - 147 psi)
MAIN GEAR TIRE SIZE	H42X16.0R20 24PR
MAIN GEAR TIRE PRESSURE	1.172 - 1.227 kPa (170 - 178 psi)

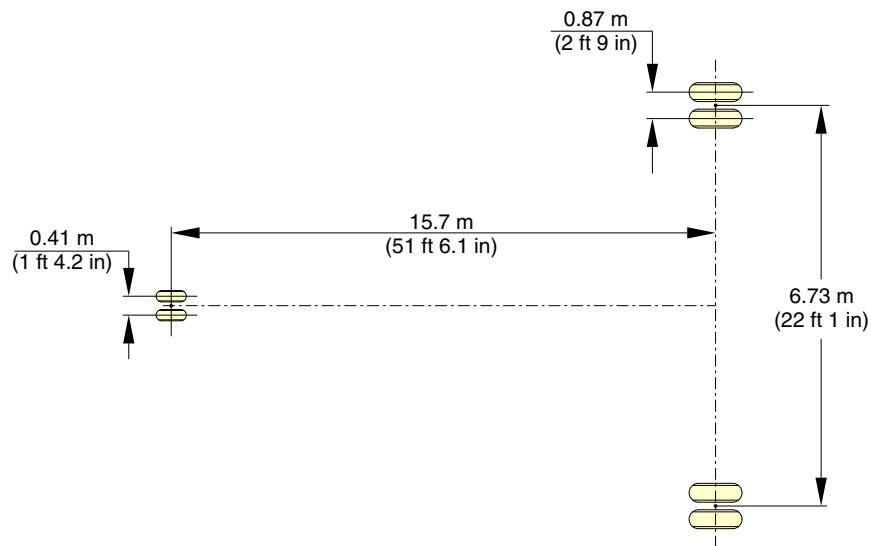

EM170E2APM070018A.IDR



7.3. **MAXIMUM PAVEMENT LOADS**

EFFECTIVITY: EMBRAER 190-E2 ACFT

Maximum Pavement Loads


Figure 7.3

LEGEND: V_{NLG} = NOSE LANDING GEAR MAXIMUM VERTICAL GROUND LOAD AT MOST FORWARD C.G.

V_{MLG} = MAIN LANDING GEAR MAXIMUM VERTICAL GROUND LOAD AT MOST AFT C.G.

H = MAIN GEAR MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING

NOTES: ALL LOADS CALCULATED USING AIRCRAFT MAXIMUM RAMP WEIGHT

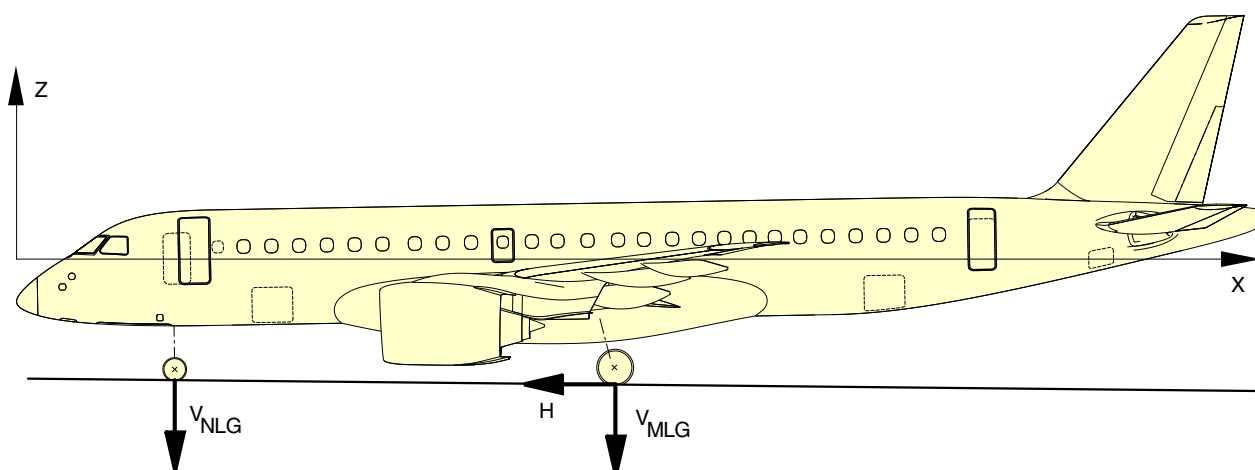

NOTES: STEADY BRAKING: $H = 0.30 \cdot V_{MLG}$

INSTANTANEOUS BRAKING: $H = 0.79 \cdot V_{MLG}$

MAXIMUM RAMP WEIGHT	V_{NLG}		V_{MLG} (PER STRUT)	H (PER STRUT)	
	STATIC AT MOST FOWARD C.G.	STEADY BRAKING WITH DECELERATION OF 3,0 m/sec ²	STATIC AT MOST AFT C.G.	STEADY BRAKING WITH DECELERATION OF 3,0 m/sec ²	INSTANTANEOUS BRAKING (FRICTION COEF. OF 0.8)
56601 kg (124784 lb)	7636 kg (16835 lb)	11469 kg (25285 lb)	26244 kg (57859 lb)	8136 kg (17937 lb)	20995 kg (46286 lb)

EM170E2APM070002A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT

Maximum Pavement Loads


Figure 7.4

LEGEND: V_{NLG} = NOSE LANDING GEAR MAXIMUM VERTICAL GROUND LOAD AT MOST FORWARD C.G.

V_{MLG} = MAIN LANDING GEAR MAXIMUM VERTICAL GROUND LOAD AT MOST AFT C.G.

H = MAIN GEAR MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING

NOTES: ALL LOADS CALCULATED USING AIRCRAFT MAXIMUM RAMP WEIGHT

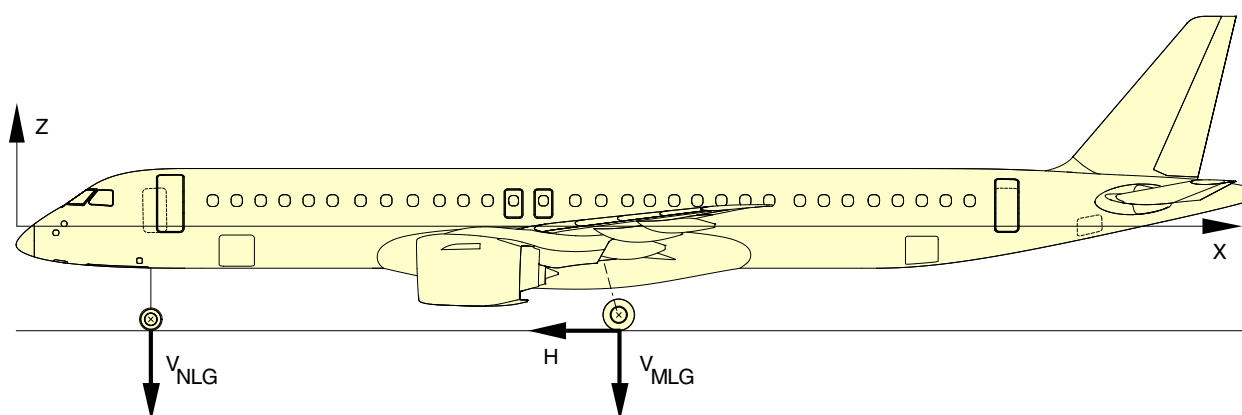

NOTES: STEADY BRAKING: $H = 0.31 \cdot V_{MLG}$

INSTANTANEOUS BRAKING: $H = 0.80 \cdot V_{MLG}$

MAXIMUM RAMP WEIGHT	V_{NLG}		V_{MLG} (PER STRUT)	H (PER STRUT)	
	STATIC AT MOST FORWARD C.G.	STEADY BRAKING WITH DECELERATION OF 3,0 m/sec ²	STATIC AT MOST AFT C.G.	STEADY BRAKING WITH DECELERATION OF 3,0 m/sec ²	INSTANTANEOUS BRAKING (FRICTION COEF. OF 0.8)
60100 kg (132498 lb)	7273 kg (16034 lb)	10599 kg (23367 lb)	26921 kg (59352 lb)	8346 kg (18400 lb)	21537 kg (47481 lb)
61700 kg (136025 lb)	5430 kg (11971 lb)	8817 kg (19438 lb)	29185 kg (64342 lb)	9047 kg (19945 lb)	23348 kg (51473 lb)

EM170E2APM070025A.IDR




7.4. LANDING GEAR LOADING ON PAVEMENT

EFFECTIVITY: EMBRAER 190-E2 ACFT

Landing Gear Loading on Pavement

Figure 7.5

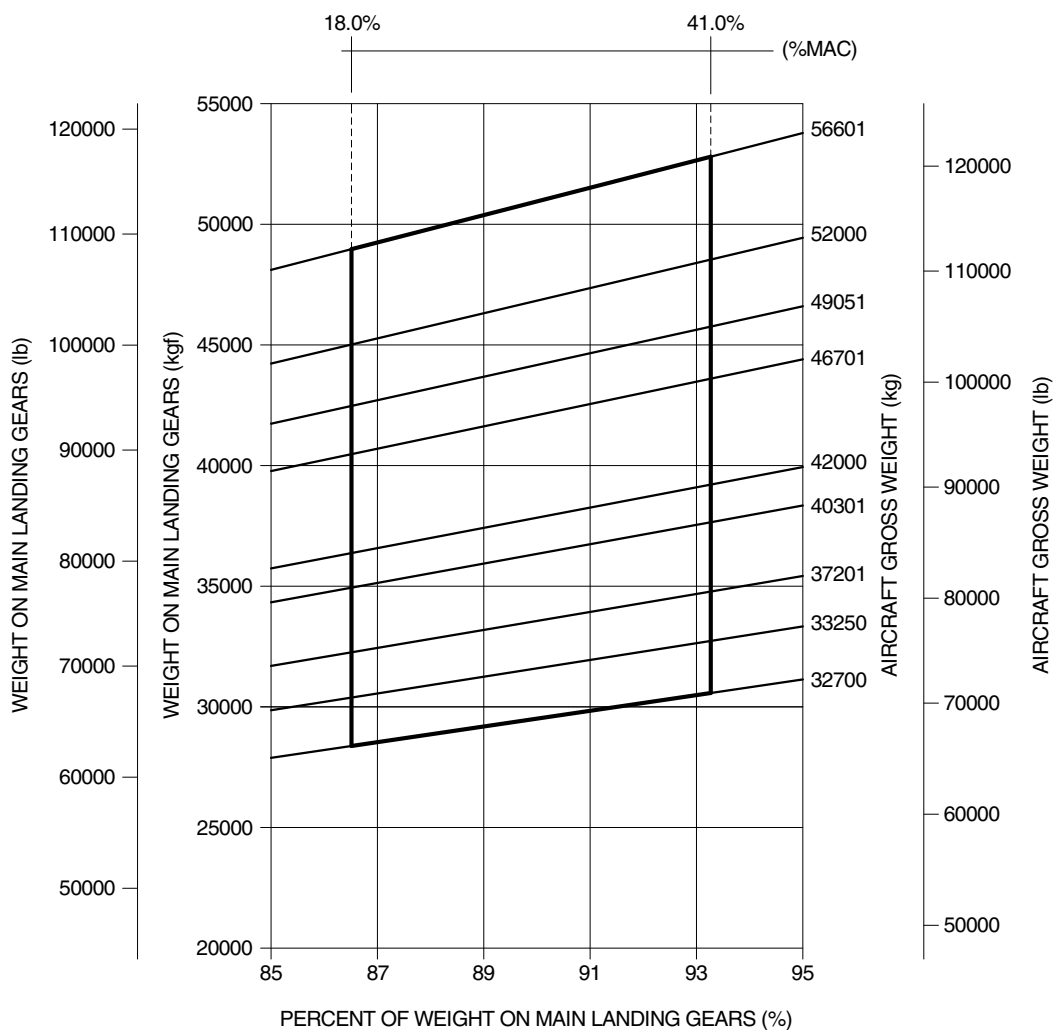


EM170E2APM070003A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT

Landing Gear Loading on Pavement

Figure 7.6

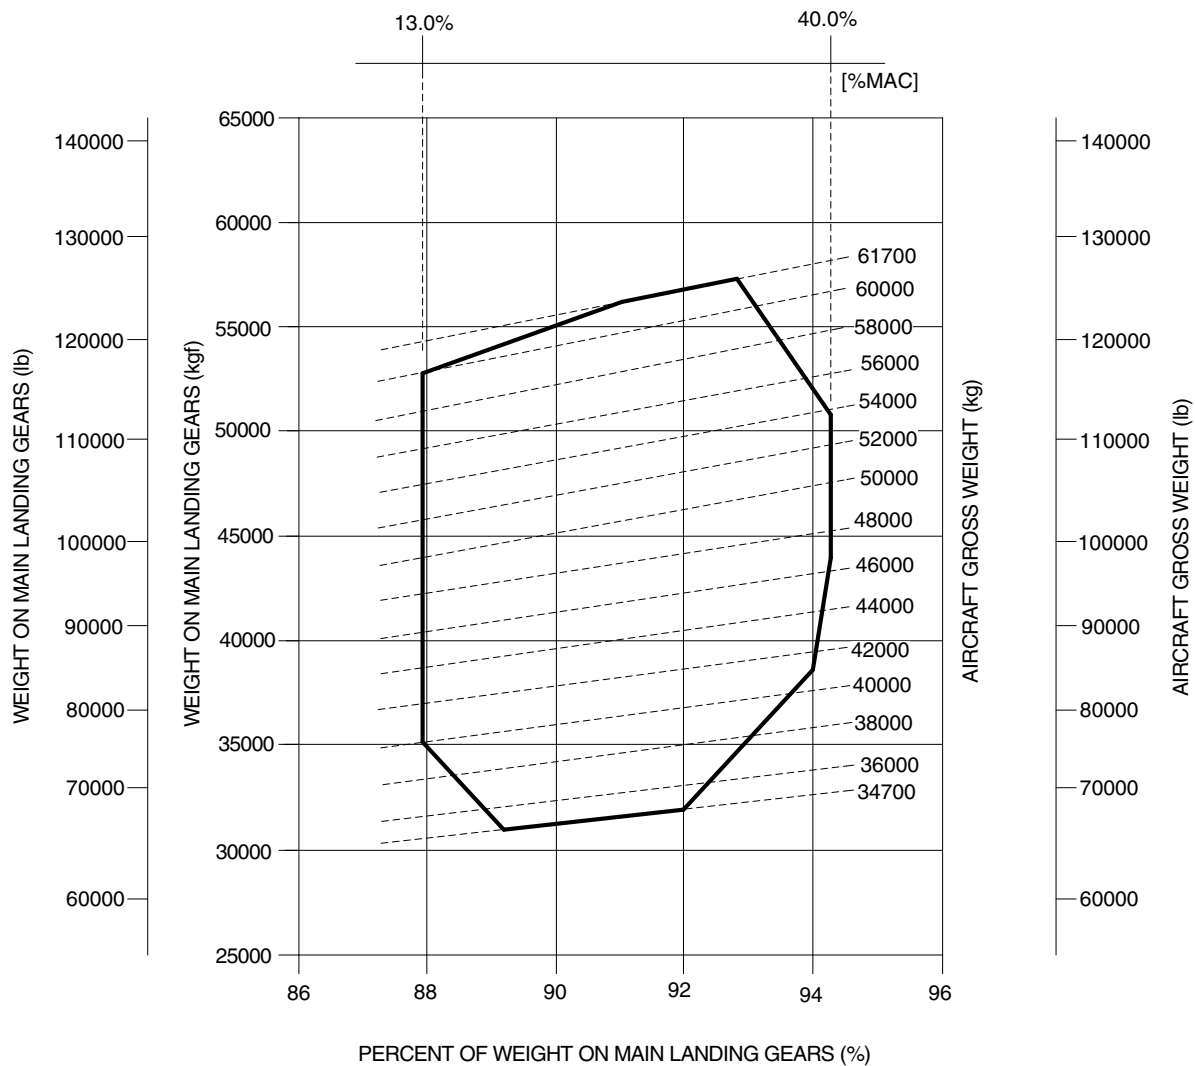

EM170E2APM070026A.IDR




7.5. **FLEXIBLE PAVEMENT REQUIREMENTS, US CORPS OF ENGINEERS DESIGN METHOD**

The flexible pavement curves that are based on procedures set forth in Instruction Report No. S-77-1, "Procedures for Development of CBR Design Curves", dated June 1977, and as modified according to the methods described in FAA Advisory Circular 150/5320-6D, "Airport Pavement Design and Evaluation", dated July 7, 1995. Instruction Report No. S-77-1 were prepared by the US Army Corps of Engineers Waterways Experiment Station, Soils and Pavements Laboratory, Vicksburg, Mississippi. The line showing 10,000 coverages is used to calculate AR.

EFFECTIVITY: EMBRAER 190-E2 ACFT

Flexible Pavement Requirements - US Army Corps of Engineers Design Method

Figure 7.7

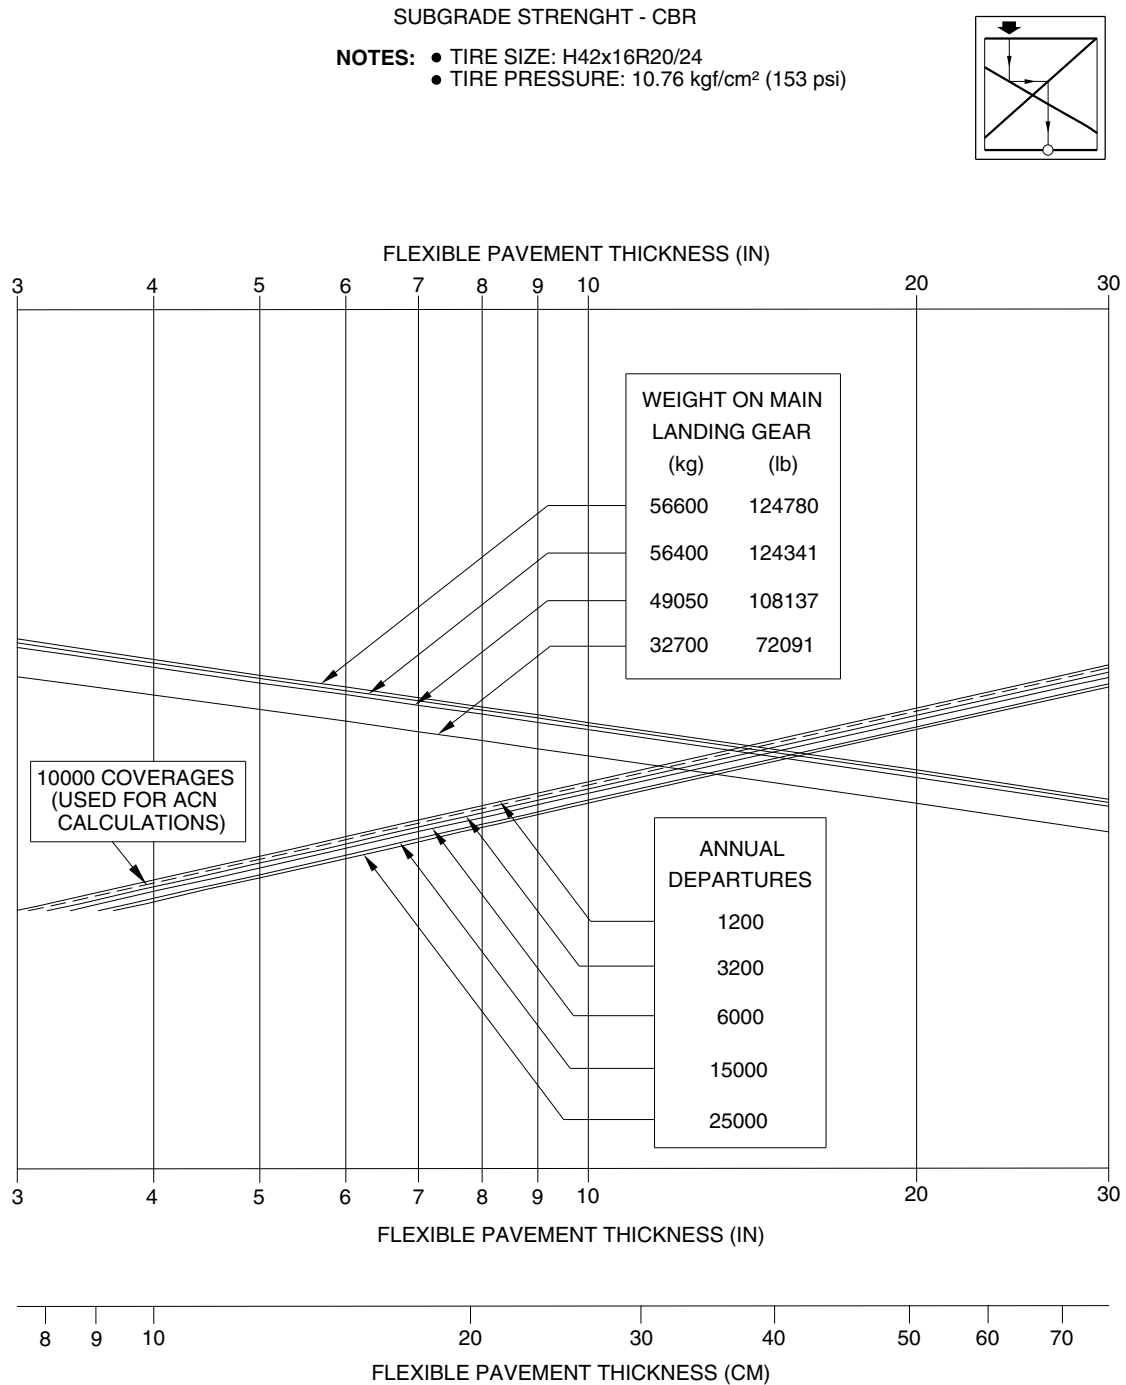


EM170E2APM070004A.IDR



EFFECTIVITY: EMBRAER 195-E2 ACFT

Flexible Pavement Requirements - US Army Corps of Engineers Design Method

Figure 7.8



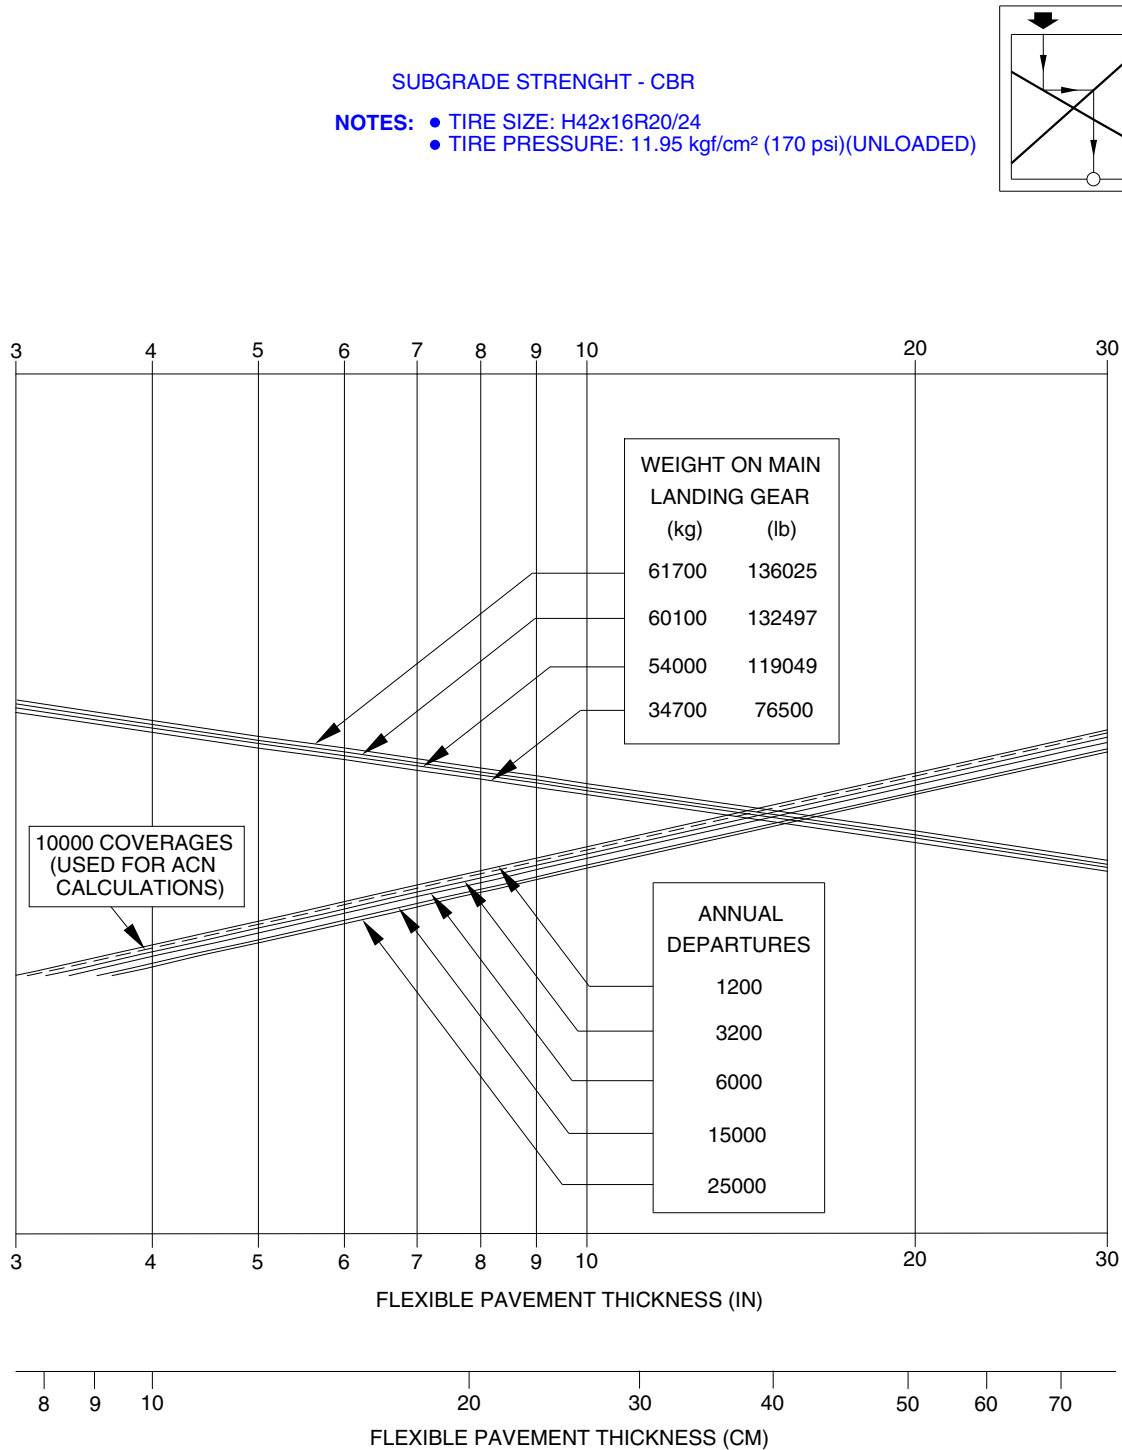


7.6. **FLEXIBLE PAVEMENT REQUIREMENTS, LCN METHOD**

The LCN Method curves for flexible pavements. They have been built using procedures and curves in the ICAO Aerodrome Design Manual, Part 3 - Pavements, Document 9157-AN/901, 1983. The same chart includes the data of equivalent single-wheel load versus pavement thickness.

EFFECTIVITY: EMBRAER 190-E2 ACFT
Flexible Pavement Requirements - LCN Method
Figure 7.9

- NOTES:**
- TIRE SIZE: H42x16R20/24
 - TIRE PRESSURE: 10.76 kgf/cm² (153 psi)

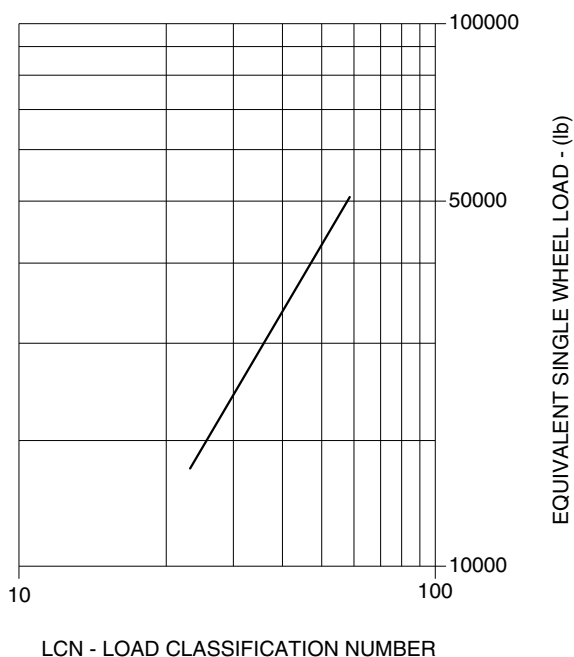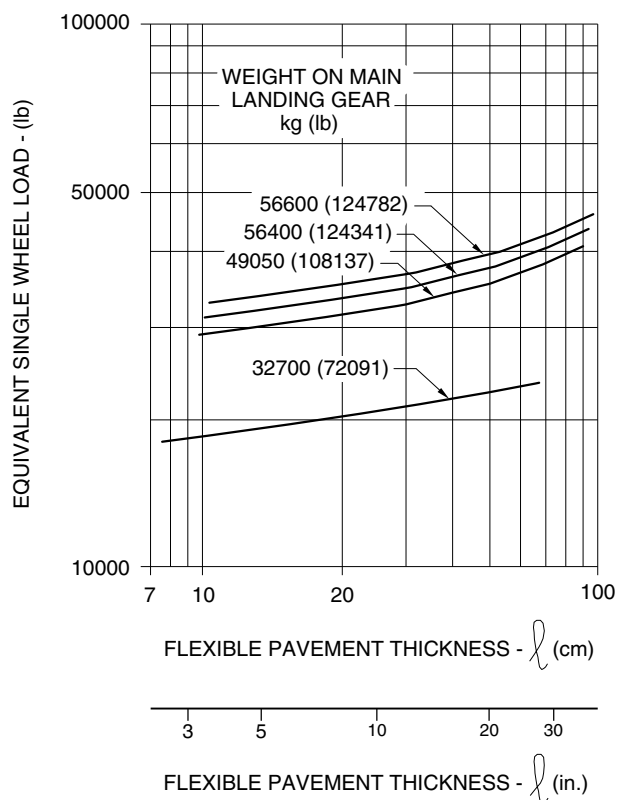
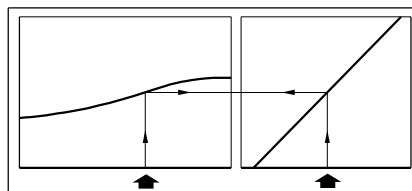


NOTE: EQUIVALENT SINGLE WHEEL LOADS
ARE DERIVED BY METHODS SHOWN
IN ICAO AERODROME MANUAL.
PART 2, PAR. 4.1.3

EM170E2APM070005A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
Flexible Pavement Requirements - LCN Method
Figure 7.10

- NOTES:**
- TIRE SIZE: H42x16R20/24
 - TIRE PRESSURE: 11.95 kgf/cm² (170 psi)(UNLOADED)

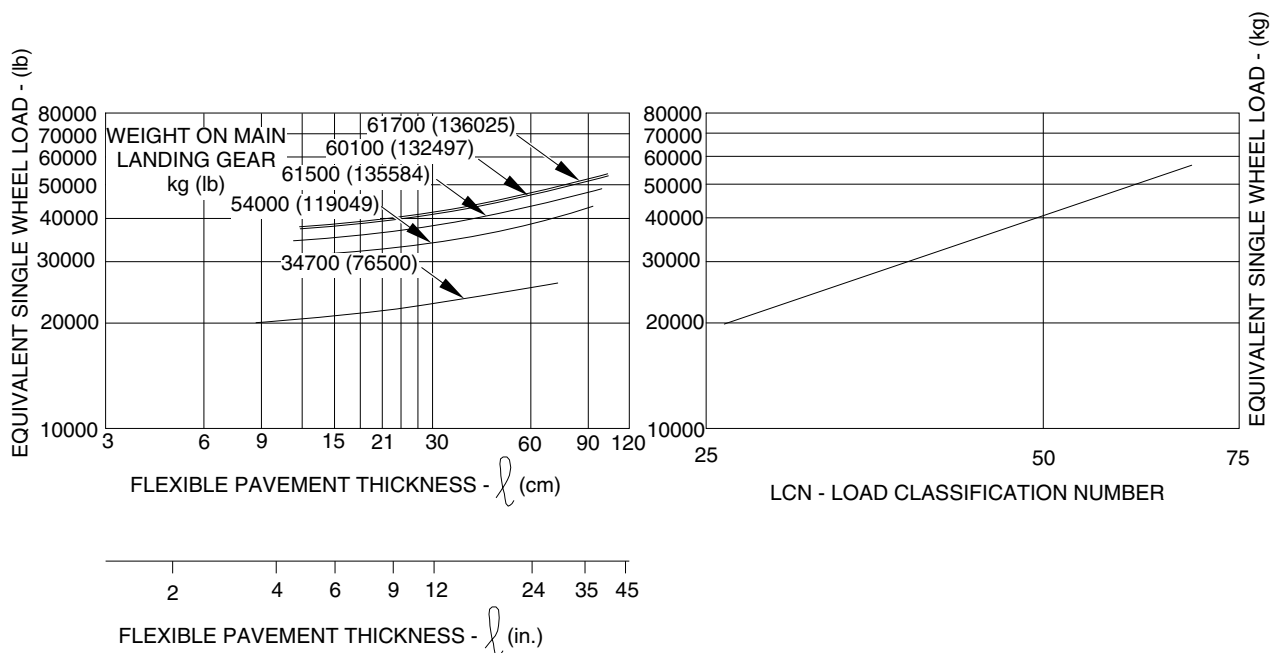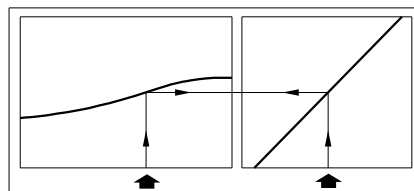

NOTE:
EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL.
PART 2, PAR. 4.1.3

EM170E2APM070022A.IDR

7.7. RIGID PAVEMENT REQUIREMENTS, PORTLAND CEMENT ASSOCIATION DESIGN METHOD

This method has a chart that has been prepared with the use of the Westergaard Equation in general accordance with the procedures outlined in the 1955 edition of "Design of Concrete Airport Pavement" published by the Portland Cement Association, 33 W. Grand Ave., Chicago 10, Illinois, but modified to the new format described in the 1968 Portland Cement Association publication, "Computer Program for Concrete Airport Pavement Design" by Robert G. Packard. The following procedure is used to develop rigid pavement design curves such as that shown in the chart:



- Once the scale for the pavement thickness to the left and the scale for allowable working stress to the right have been established, an arbitrary load line is drawn representing the main landing gear maximum weight to be shown.
- All values of the subgrade modulus (k-values) are then plotted.
- Additional load lines for the incremental values of weight on the main landing gear are then established on the basis of the curve for $k=300$, already established.

EFFECTIVITY: EMBRAER 190-E2 ACFT

Rigid Pavement Requirements - Portland Cement Association Design Method

Figure 7.11

- NOTES:**
- TIRE SIZE: H42x16R20/24
 - TIRE PRESSURE: 10.76 kgf/cm² (153 psi) (UNLOADED)

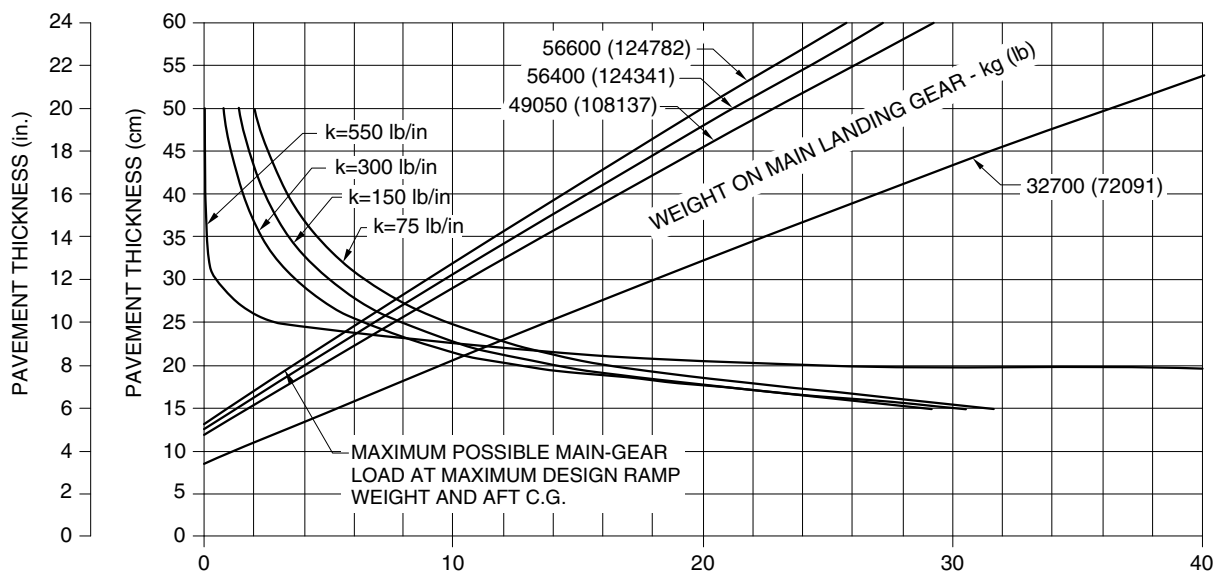

NOTE: THE VALUES OBTAINED BY USING THE MAXIMUM LOAD REFERENCE LINE AND ANY VALUE OF "K" ARE EXACT. FOR LOADS LESS THAN MAXIMUM, THE CURVES ARE EXACT FOR K=300 BUT DEVIATE SLIGHTLY FOR OTHER VALUES OF "K".

EM170E2APM070006A.IDR





EFFECTIVITY: EMBRAER 195-E2 ACFT

Rigid Pavement Requirements - Portland Cement Association Design Method

Figure 7.12

NOTES:

- TIRE SIZE: H42x16R20/24
- TIRE PRESSURE: 11.95 kgf/cm² (170 psi) (UNLOADED)

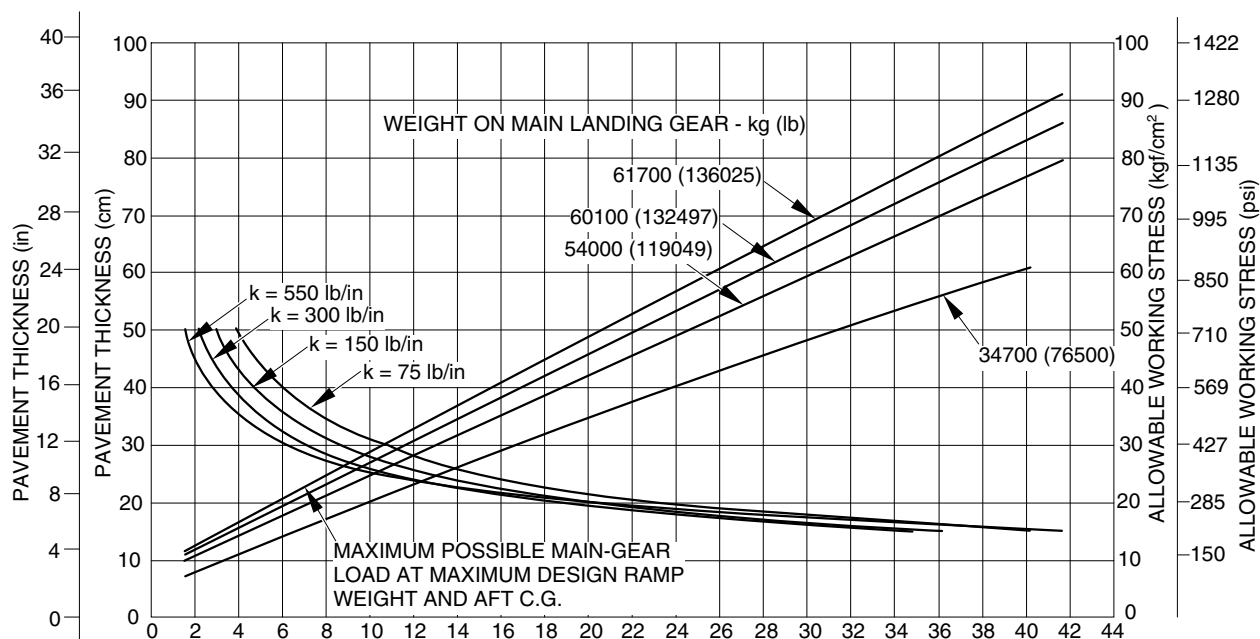

NOTE: THE VALUES OBTAINED BY USING THE MAXIMUM LOAD REFERENCE LINE AND ANY VALUE OF "K" ARE EXACT. FOR LOADS LESS THAN MAXIMUM, THE CURVES ARE EXACT FOR K=300 BUT DEVIATE SLIGHTLY FOR OTHER VALUES OF "K".

EM170E2APM070024A.IDR

7.8. RIGID PAVEMENT REQUIREMENTS, LCN METHOD

This LCN Method presents curves for rigid pavements. They have been built using procedures and curves in ICAO Aerodrome Design Manual, Part 3 - Pavements, Document 9157-AN/901, 1983. The same chart includes the data of equivalent single-wheel load versus radius of relative stiffness.

To determine the aircraft weight that can be accommodated on a particular rigid airport pavement, both the LCN of the pavement and the radius of relative stiffness must be known.

The radius of relative stiffness values is obtained from a table. This table presents the radius of relative stiffness values that are based on Young's modulus (E) of 4,000,000 psi and Poisson's ratio (μ) of 0.15.

For convenience in finding this radius based on other values of E and μ , the curves are included. For example, to find an RRS value based on an E of 3,000,000 psi, the "E" factor of 0.931 is multiplied by the RRS value found in figure 7.6.3. The effect of the variations of μ on the RRS value is treated in a similar manner.



EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

Radius of Relative Stiffness

Figure 7.13

RADIUS OF RELATIVE STIFFNESS (ℓ) VALUES IN INCHES

$$\ell = \sqrt[4]{\frac{Ed^3}{12(1-\mu^2)k}} = 24.1652 \sqrt[4]{\frac{d^3}{k}}$$

WHERE: E = YOUNG'S MODULUS = 4×10^6 psi
k = SUBGRADE MODULUS, lb/in²
d = RIGID-PAVEMENT THICKNESS. in.
 μ = POISSON'S RATIO = 0.15



d(in)	k=75	k=100	k=150	k=200	k=250	k=300	k=350	k=400	k=500	k=550
6.0	31.48	29.30	26.47	24.63	23.30	22.26	21.42	20.72	19.59	19.13
6.5	33.43	31.11	28.11	26.16	24.74	23.64	22.74	22.00	20.80	20.31
7.0	35.34	32.89	29.72	27.65	26.15	24.99	24.04	23.25	21.99	21.47
7.5	37.22	34.63	31.29	29.12	27.54	26.32	25.32	24.49	23.16	22.61
8.0	39.06	36.35	32.85	30.57	28.91	27.62	26.58	25.70	24.31	23.74
8.5	40.88	38.04	34.37	31.99	30.25	28.91	27.81	26.90	25.44	24.84
9.0	42.67	39.71	35.88	33.39	31.58	30.17	29.03	28.08	26.55	25.93
9.5	44.43	41.35	37.36	34.77	32.89	31.42	30.23	29.24	27.65	27.00
10.0	46.18	42.97	38.83	36.14	34.17	32.65	31.42	30.39	28.74	28.06
10.5	47.90	44.57	40.28	37.48	35.45	33.87	32.59	31.52	29.81	29.11
11.0	49.60	46.16	41.71	38.81	36.71	35.07	33.75	32.64	30.87	30.14
11.5	51.28	47.72	43.12	40.13	37.95	36.26	34.89	33.74	31.91	31.16
12.0	52.94	49.27	44.52	41.43	39.18	37.44	36.02	34.84	32.95	32.17
12.5	54.59	50.80	45.90	42.72	40.40	38.60	37.14	35.92	33.97	33.17
13.0	56.22	52.32	47.27	43.99	41.61	39.75	38.25	36.99	34.99	34.16
13.5	57.83	53.82	48.63	45.26	42.80	40.89	39.35	38.06	35.99	35.14
14.0	59.43	55.31	49.98	46.51	43.98	42.02	40.44	39.11	36.99	36.12
14.5	61.02	56.78	51.31	47.75	45.16	43.15	41.51	40.15	37.97	37.08
15.0	62.59	58.25	52.63	48.98	46.32	44.26	42.58	41.19	38.95	38.03
15.5	64.15	59.70	53.94	50.20	47.47	45.36	43.64	42.21	39.92	38.98
16.0	65.69	61.13	55.24	51.41	48.62	46.45	44.70	43.23	40.88	39.92
16.5	67.23	62.56	56.53	52.61	49.75	47.54	45.74	44.24	41.84	40.85
17.0	68.75	63.98	57.81	53.80	50.88	48.61	46.77	45.24	42.78	41.78
17.5	70.26	65.38	59.08	54.98	52.00	49.68	47.80	46.23	43.72	42.70
18.0	71.76	66.78	60.34	56.15	53.11	50.74	48.82	47.22	44.66	43.61
18.5	73.25	68.17	61.60	57.32	54.21	51.80	49.84	48.20	45.59	44.51
19.0	74.73	69.54	62.84	58.48	55.31	52.84	50.84	49.17	46.51	45.41
19.5	76.20	70.91	64.08	59.63	56.39	53.88	51.84	50.14	47.42	46.30
20.0	77.66	72.27	65.30	60.77	57.47	54.91	52.84	51.10	48.33	47.19
20.5	79.11	73.62	66.52	61.91	58.55	55.94	53.83	52.06	49.23	48.07
21.0	80.55	74.96	67.74	63.04	59.62	56.96	54.81	53.01	50.13	48.95
21.5	81.99	76.30	68.94	64.16	60.68	57.97	55.78	53.95	51.02	49.82
22.0	83.41	77.63	70.14	65.28	61.73	58.98	56.75	54.89	51.91	50.69
22.5	84.83	78.95	71.34	66.38	62.78	59.99	57.72	55.82	52.79	51.55
23.0	86.24	80.26	72.52	67.49	63.83	60.98	58.68	56.75	53.67	52.41
23.5	87.64	81.56	73.70	68.59	64.86	61.97	59.63	57.67	54.54	53.26
24.0	89.04	82.86	74.87	69.68	65.90	62.96	60.58	58.59	55.41	54.11
24.5	90.43	84.15	76.04	70.76	66.92	63.94	61.52	59.50	56.28	54.95
25.0	91.81	85.44	77.20	71.84	67.95	64.92	62.46	60.41	57.14	55.79

EM170E2APM070007A.IDR

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

Radius of Relative Stiffness (other values)

Figure 7.14

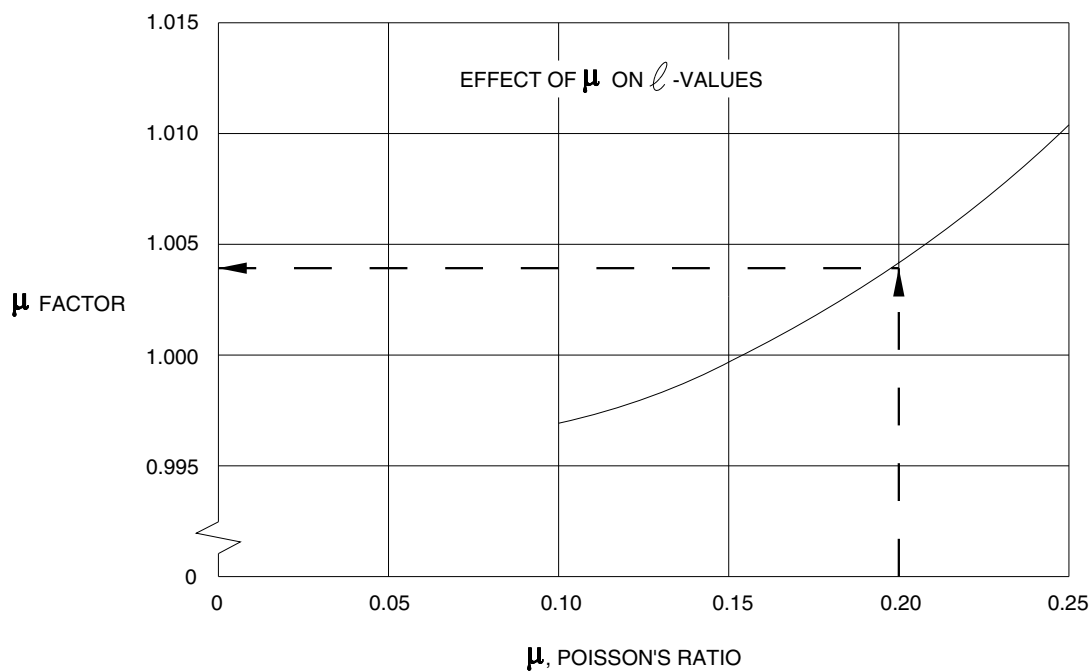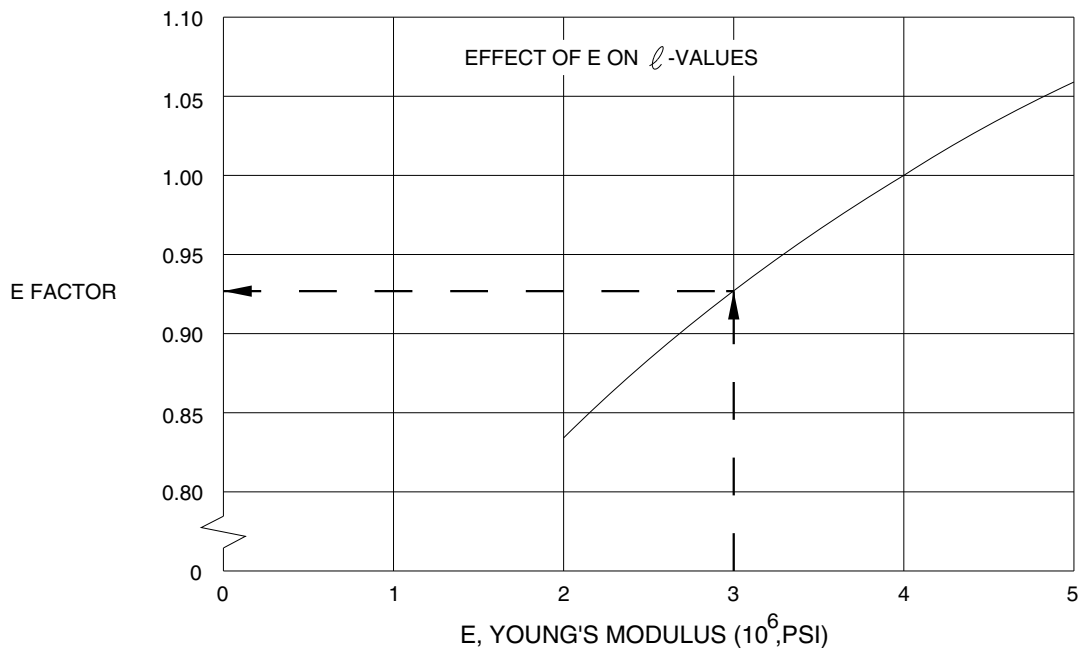


NOTE:

BOTH CURVES ON THIS PAGE ARE USED TO ADJUST THE ℓ -VALUES.



EM170E2APM070008A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT
Rigid Pavement Requirements - LCN Method
Figure 7.15

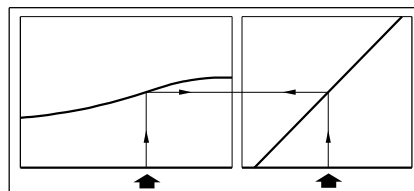

NOTES:

- TIRE SIZE: H42x16R20/24
- TIRE PRESSURE: 10.76 kgf/cm² (153 psi)

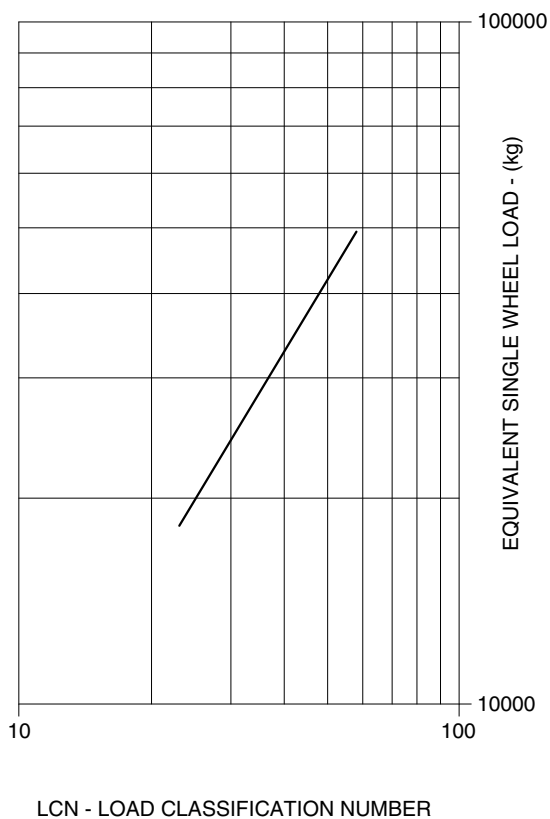
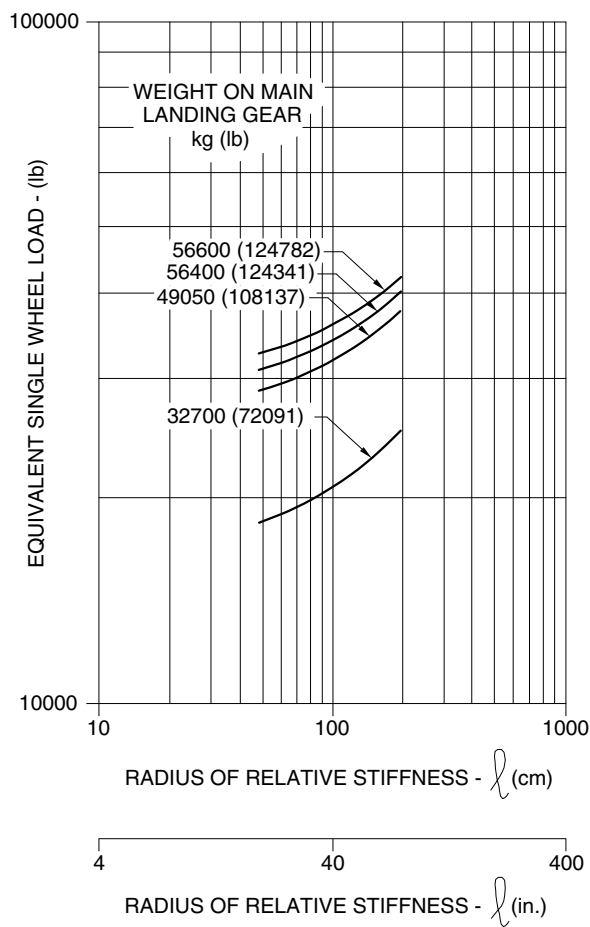


NOTE: EQUIVALENT SINGLE WHEEL LOADS
ARE DERIVED BY METHODS SHOWN
IN ICAO AERODROME MANUAL.
PART 2, PAR. 4.1.3

EM170E2APM070009A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
Rigid Pavement Requirements - LCN Method
Figure 7.16

- NOTES:**
- TIRE SIZE: H42x16R20/24
 - TIRE PRESSURE: 11.95 kg/cm² (170 psi) (UNLOADED)

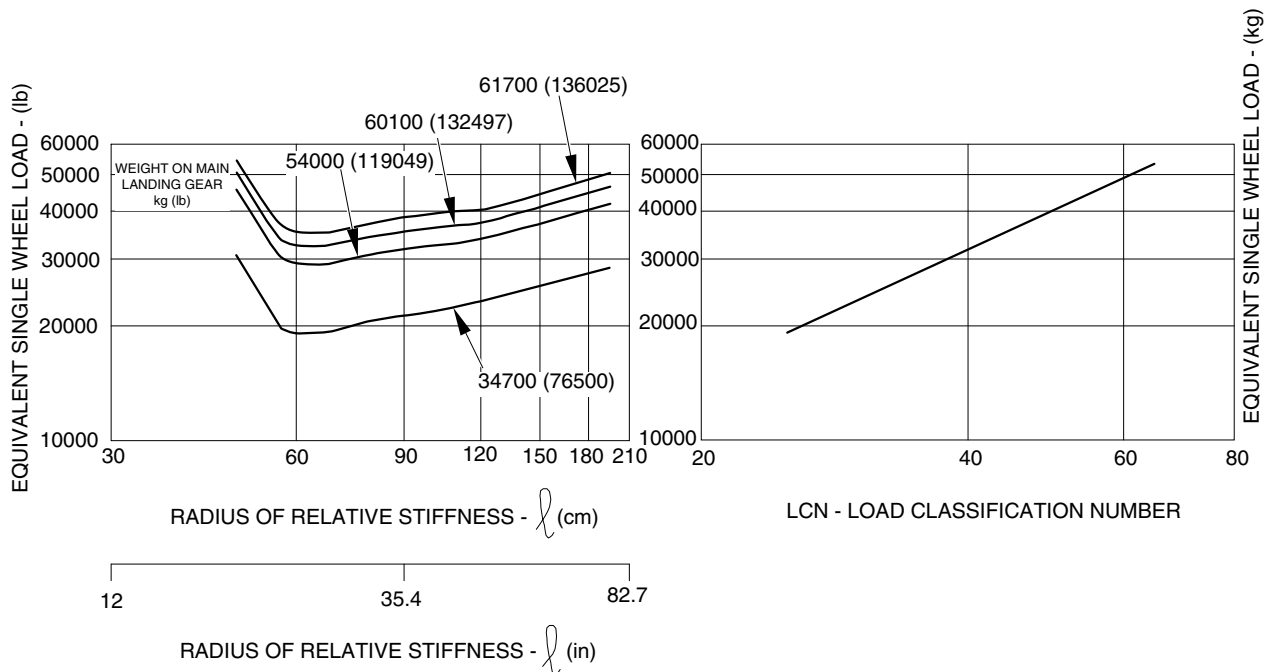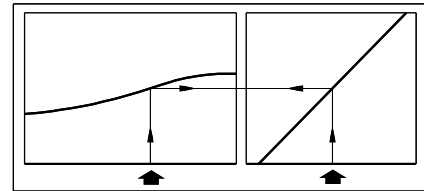

NOTE: EQUIVALENT SINGLE WHEEL LOADS
ARE DERIVED BY METHODS SHOWN
IN ICAO AERODROME MANUAL.
PART 2, PAR. 4.1.3

**7.9. ACN - PCN SYSTEM - FLEXIBLE AND RIGID PAVEMENTS**

EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT

The ACN/PCN system as referenced in Amendment 35 to ICAO Annex 14, "Aerodromes", provides a standardized international aircraft/pavement rating system.

The PCN is an index rating of the mass which an evaluation shows the pavement can withstand when applied by a standard single wheel. The ACN is established for the particular pavement type and subgrade category of the rated pavement as well as for the particular aircraft mass and characteristics.

An aircraft must have an ACN equal to or less than the PCN to operate without restriction on the pavement.

The method of pavement evaluation is left to the airport with the results of their evaluation presented as follows:

Table 7.1 - Pavement Evaluation

PAVEMENT TYPE	SUBGRADE CATEGORY	TIRE PRESSURE CATEGORY	METHOD
R – Rigid	A – High	W – No Limit	T – Technical
F – Flexible	B – Medium	X – to 1.75 Mpa (254 psi)	U – Using aircraft
	C – Low	Y – to 1.25 Mpa (181 psi)	
	D – Ultra Low	Z – to 0.5 Mpa (73 psi)	
Report example: PCN 80/R/B/X/T, where:			
80 = PCN			
R = Pavement Type: Rigid			
B = Subgrade Category: Medium			
X = Tire Pressure Category: Medium (limited to 1.5 Mpa)			
T = Evaluation Method: Technical			

The flexible pavements have four subgrade categories:

- A. High Strength - Pavement Data 15.
- B. Medium Strength - Pavement Data 10.
- C. Low Strength - Pavement Data 6.
- D. Ultra Low Strength - Pavement Data 3.



The rigid pavements have four subgrade categories:

- A. High Strength - Subgrade $k = 150 \text{ MN/m}^3$ (550 lb/ft³).
- B. Medium Strength - $k = 80 \text{ MN/m}^3$ (300 lb/ft³).
- C. Low Strength - $k = 40 \text{ MN/m}^3$ (150 lb/ft³).
- D. Ultra Low Strength - $k = 20 \text{ MN/m}^3$ (75 lb/ft³).

EFFECTIVITY: EMBRAER 190-E2 ACFT
ACN For Flexible Pavement
Figure 7.17

FLEXIBLE PAVEMENT SUBGRADE

- NOTES: ● TIRE SIZE: H42 x 16 - 20 24 PR
● TIRE PRESSURE: 10.62 kgf/cm² (151psi) (UNLOADED)

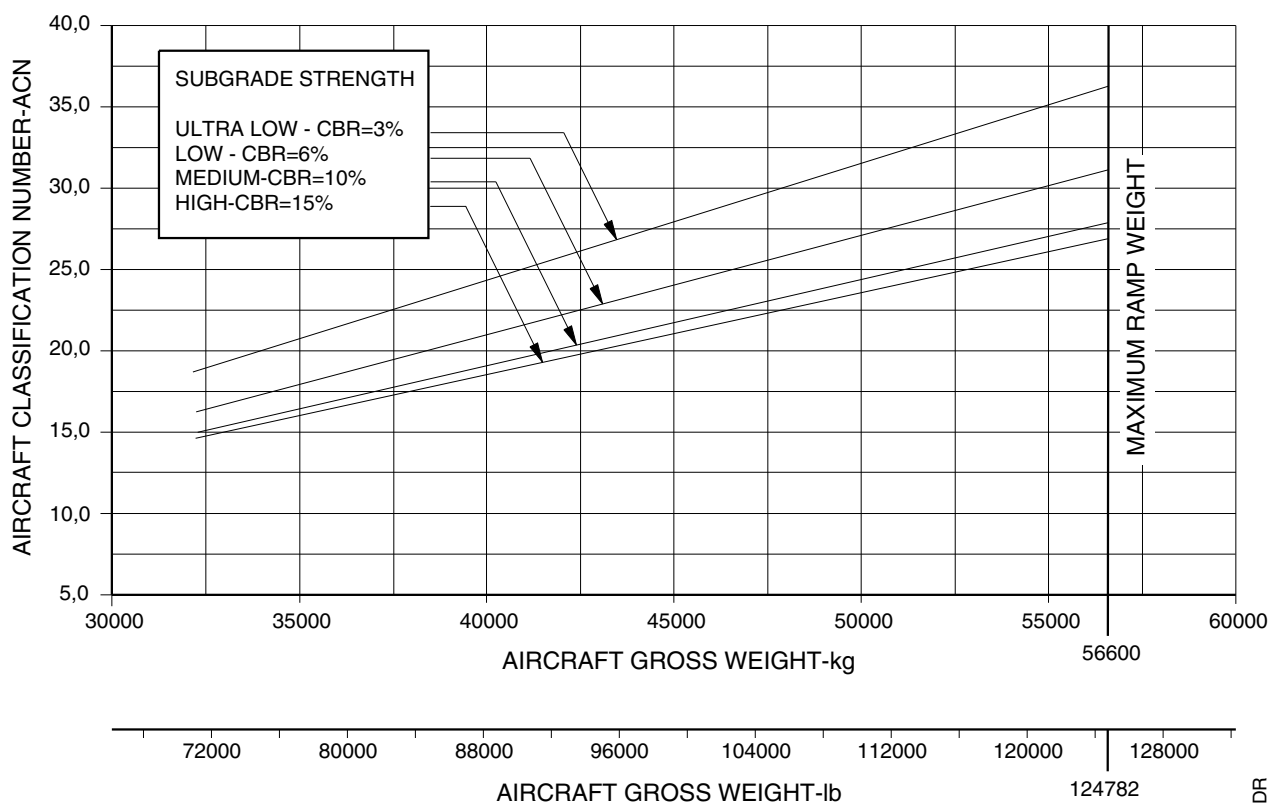



EM170E2APM070010A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
ACN For Flexible Pavement
Figure 7.18

FLEXIBLE PAVEMENT SUBGRADE

- NOTES:
- TIRE SIZE: H42 x 16.0R 20
 - TIRE PRESSURE: 11.95 kgf/cm² (170psi) (UNLOADED)

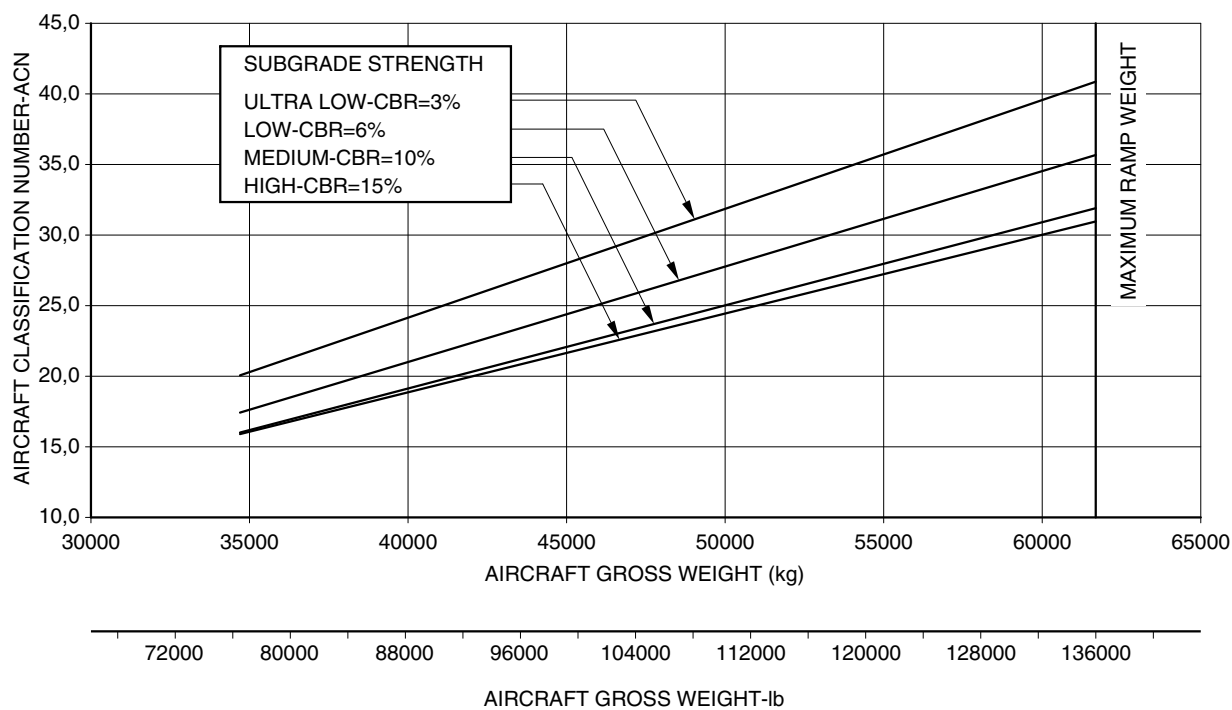



EM170E2APM070019A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT
ACN For Rigid Pavement
Figure 7.19

RIGID PAVEMENT SUBGRADE

- NOTES: ● TIRE SIZE: H42 x 16 - 20 24 PR
● TIRE PRESSURE: 10.62 kgf/cm² (151psi) (UNLOADED)

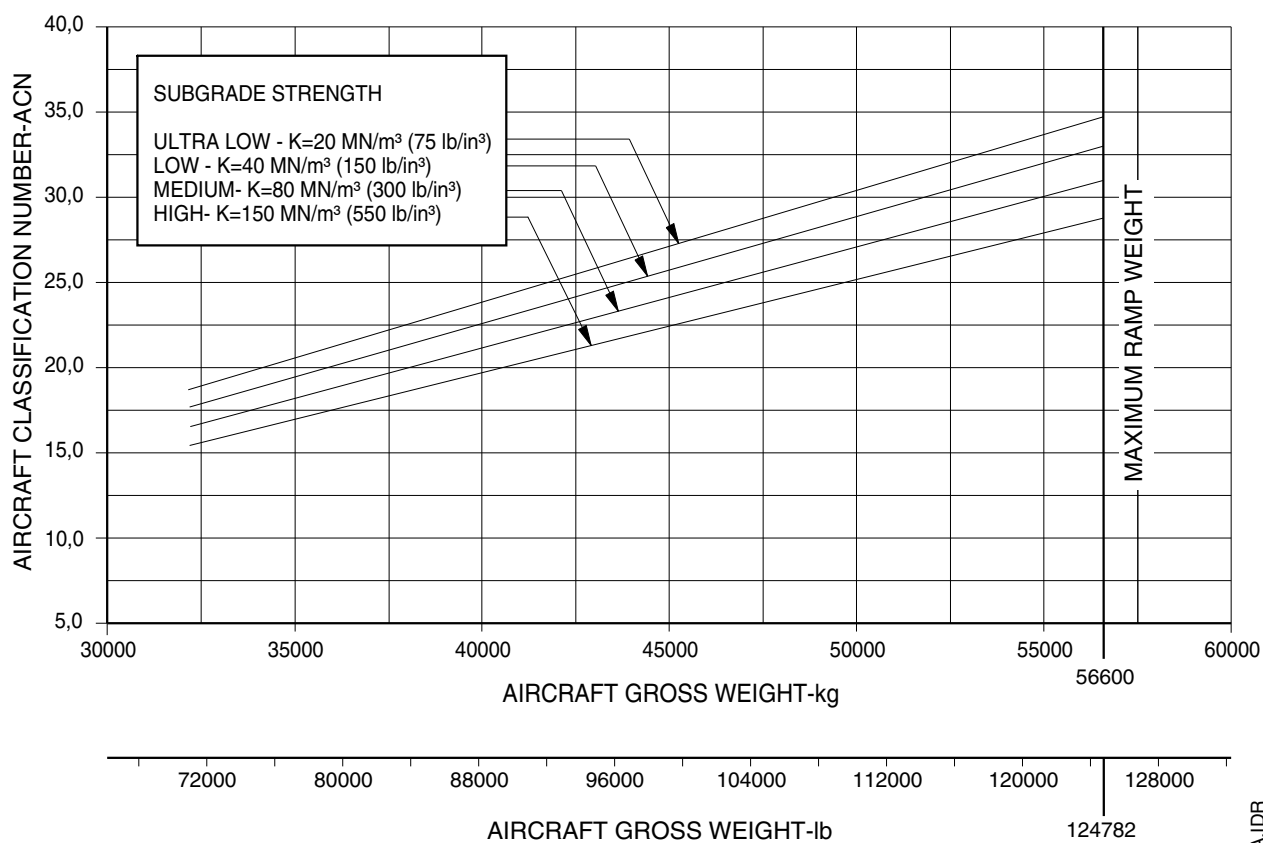



EM170E2APM07001 1A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT
ACN For Rigid Pavement
Figure 7.20

RIGID PAVEMENT SUBGRADE

- NOTES:
- TIRE SIZE: H42 x 16.0R 20
 - TIRE PRESSURE: 11.95 kgf/cm² (170psi) (UNLOADED)

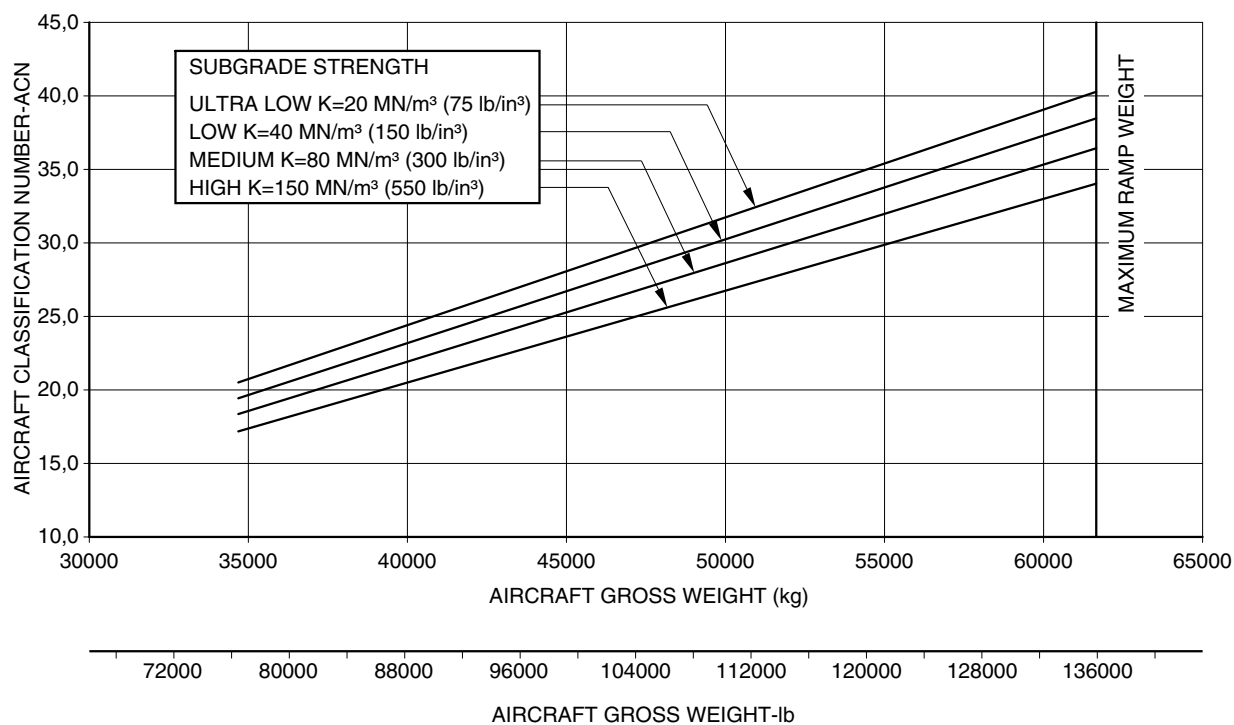

EM170E2APM070020A.IDR

8. POSSIBLE EMBRAER 196 DERIVATIVE AIRCRAFT

EFFECTIVITY: EMBRAER 175-E2, 190-E2 AND 195-E2 SERIES ACFT

8.1. NOT APPLICABLE

9. SCALED DRAWINGS*EFFECTIVITY: EMBRAER 190-E2 AND 195-E2 ACFT***9.1. GENERAL**


This section provides plan views to the following scales:

- English/American Customary Weights and Measures:
 - 1 in = 32 ft
 - 1 in = 50 ft
 - 1 in = 100 ft
- Metric
 - 1:500
 - 1:1000

EFFECTIVITY: EMBRAER 190-E2 ACFT

Scale: 1 Inch Equals 32 Feet

Figure 9.1

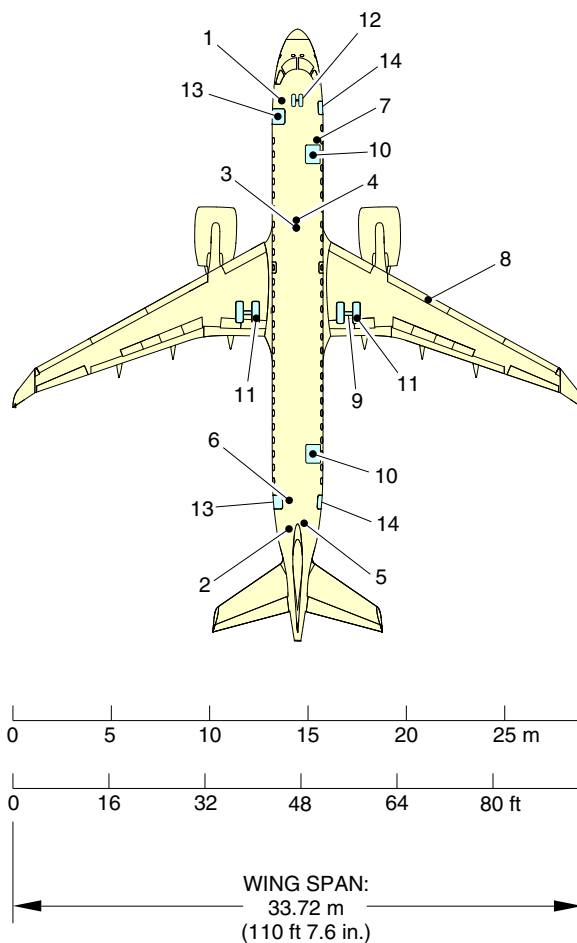


ITEM	DESCRIPTION	ITEM	DESCRIPTION
1	EXTERNAL POWER SUPPLY 115 VAC	8	PRESSURE REFUELING / DEFUELING
2	EXTERNAL POWER SUPPLY 28 VDC	9	GROUNDING POINT (RIGHT MLG)
3	HIGH PRESSURE AIR GROUND SUPPLY	10	CARGO DOOR
4	LOW PRESSURE AIR GROUND SUPPLY	11	MAIN LANDING GEAR
5	WASTE SERVICING PANEL	12	NOSE LANDING GEAR
6	POTABLE WATER SERVICING PANEL	13	PASSENGER DOOR
7	OXYGEN REFILL / REPLACE BOTTLE	14	SERVICE DOOR

EM170E2APM090001A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT

Scale: 1 Inch Equals 50 Feet

Figure 9.2

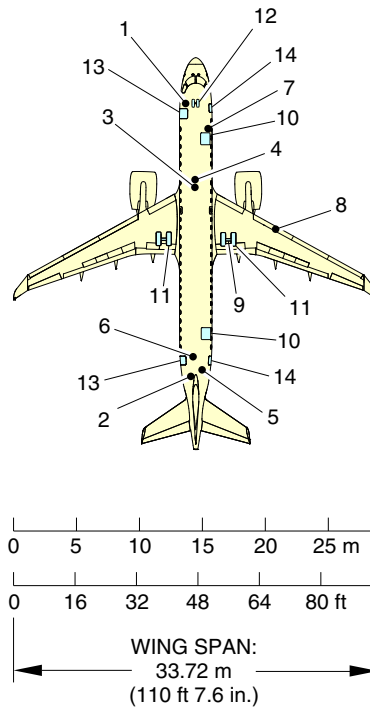


ITEM	DESCRIPTION	ITEM	DESCRIPTION
1	EXTERNAL POWER SUPPLY 115 VAC	8	PRESSURE REFUELING / DEFUELING
2	EXTERNAL POWER SUPPLY 28 VDC	9	GROUNDING POINT (RIGHT MLG)
3	HIGH PRESSURE AIR GROUND SUPPLY	10	CARGO DOOR
4	LOW PRESSURE AIR GROUND SUPPLY	11	MAIN LANDING GEAR
5	WASTE SERVICING PANEL	12	NOSE LANDING GEAR
6	POTABLE WATER SERVICING PANEL	13	PASSENGER DOOR
7	OXYGEN REFILL / REPLACE BOTTLE	14	SERVICE DOOR

EFFECTIVITY: EMBRAER 190-E2 ACFT

Scale: 1 Inch Equals 100 Feet

Figure 9.3

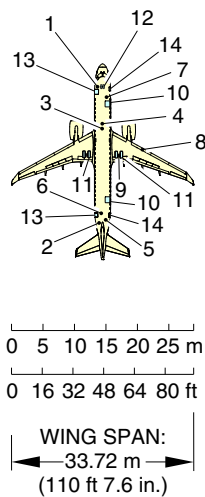



ITEM	DESCRIPTION	ITEM	DESCRIPTION
1	EXTERNAL POWER SUPPLY 115 VAC	8	PRESSURE REFUELING / DEFUELING
2	EXTERNAL POWER SUPPLY 28 VDC	9	GROUNDING POINT (RIGHT MLG)
3	HIGH PRESSURE AIR GROUND SUPPLY	10	CARGO DOOR
4	LOW PRESSURE AIR GROUND SUPPLY	11	MAIN LANDING GEAR
5	WASTE SERVICING PANEL	12	NOSE LANDING GEAR
6	POTABLE WATER SERVICING PANEL	13	PASSENGER DOOR
7	OXYGEN REFILL / REPLACE BOTTLE	14	SERVICE DOOR

EM170E2APM090003A.IDR

EFFECTIVITY: EMBRAER 190-E2 ACFT

Scale: 1 to 500

Figure 9.4

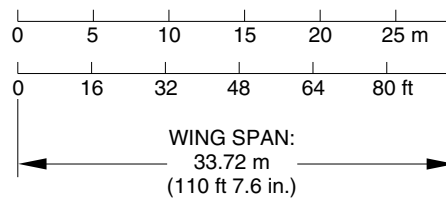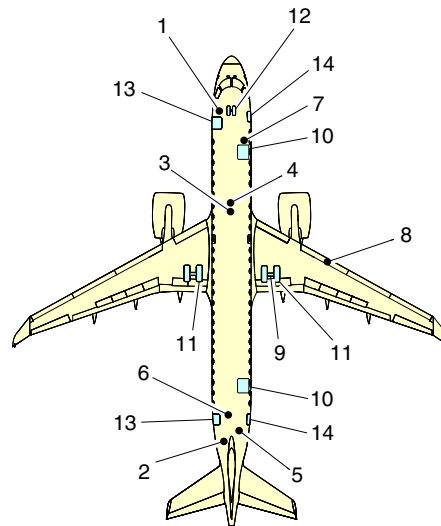


ITEM	DESCRIPTION	ITEM	DESCRIPTION
1	EXTERNAL POWER SUPPLY 115 VAC	8	PRESSURE REFUELING / DEFUELING
2	EXTERNAL POWER SUPPLY 28 VDC	9	GROUNDING POINT (RIGHT MLG)
3	HIGH PRESSURE AIR GROUND SUPPLY	10	CARGO DOOR
4	LOW PRESSURE AIR GROUND SUPPLY	11	MAIN LANDING GEAR
5	WASTE SERVICING PANEL	12	NOSE LANDING GEAR
6	POTABLE WATER SERVICING PANEL	13	PASSENGER DOOR
7	OXYGEN REFILL / REPLACE BOTTLE	14	SERVICE DOOR

EFFECTIVITY: EMBRAER 190-E2 ACFT

Scale: 1 to 1000

Figure 9.5

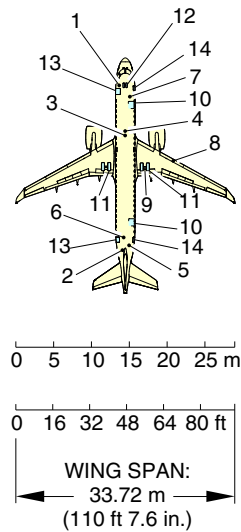


ITEM	DESCRIPTION	ITEM	DESCRIPTION
1	EXTERNAL POWER SUPPLY 115 VAC	8	PRESSURE REFUELING / DEFUELING
2	EXTERNAL POWER SUPPLY 28 VDC	9	GROUNDING POINT (RIGHT MLG)
3	HIGH PRESSURE AIR GROUND SUPPLY	10	CARGO DOOR
4	LOW PRESSURE AIR GROUND SUPPLY	11	MAIN LANDING GEAR
5	WASTE SERVICING PANEL	12	NOSE LANDING GEAR
6	POTABLE WATER SERVICING PANEL	13	PASSENGER DOOR
7	OXYGEN REFILL / REPLACE BOTTLE	14	SERVICE DOOR

EM170E2APM090005A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT

Scale: 1 Inch Equals 32 Feet

Figure 9.6

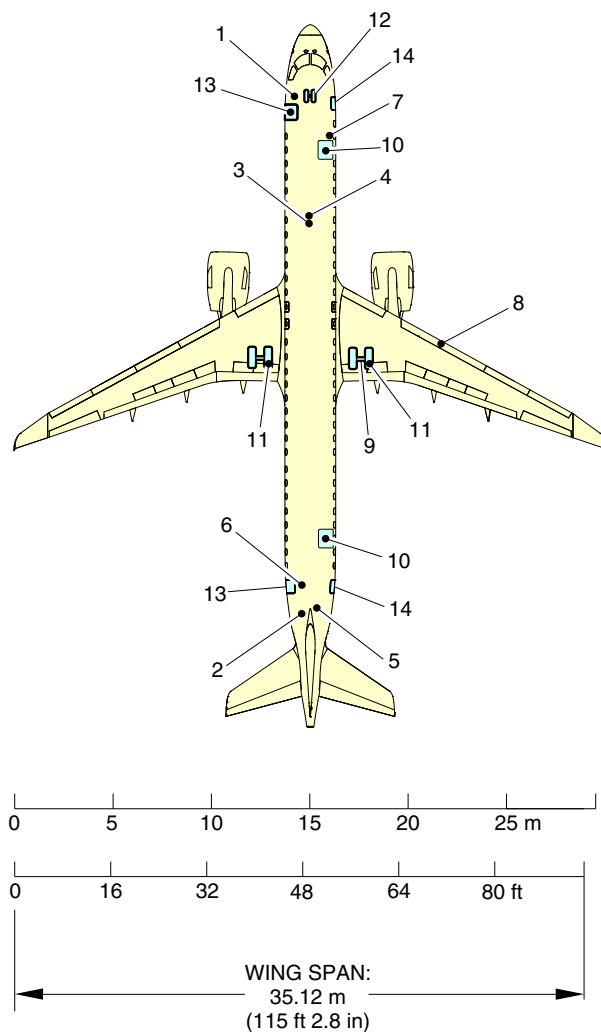



ITEM	DESCRIPTION	ITEM	DESCRIPTION
1	EXTERNAL POWER SUPPLY 115 VAC	8	PRESSURE REFUELING / DEFUELING
2	EXTERNAL POWER SUPPLY 28 VDC	9	GROUNDING POINT (RIGHT MLG)
3	HIGH PRESSURE AIR GROUND SUPPLY	10	CARGO DOOR
4	LOW PRESSURE AIR GROUND SUPPLY	11	MAIN LANDING GEAR
5	WASTE SERVICING PANEL	12	NOSE LANDING GEAR
6	POTABLE WATER SERVICING PANEL	13	PASSENGER DOOR
7	OXYGEN REFILL / REPLACE BOTTLE	14	SERVICE DOOR

EM170E2APM090006A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT

Scale: 1 Inch Equals 50 Feet

Figure 9.7

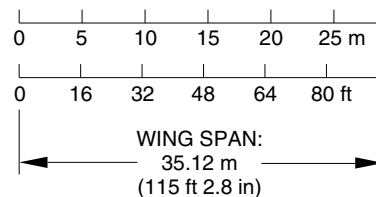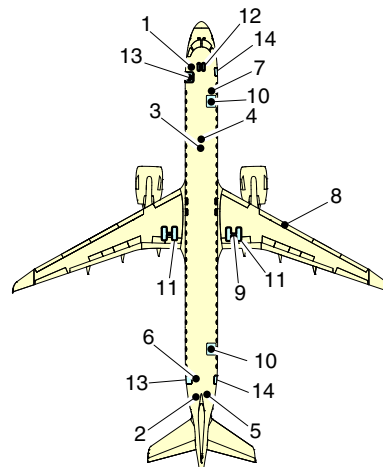


ITEM	DESCRIPTION	ITEM	DESCRIPTION
1	EXTERNAL POWER SUPPLY 115 VAC	8	PRESSURE REFUELING / DEFUELING
2	EXTERNAL POWER SUPPLY 28 VDC	9	GROUNDING POINT (RIGHT MLG)
3	HIGH PRESSURE AIR GROUND SUPPLY	10	CARGO DOOR
4	LOW PRESSURE AIR GROUND SUPPLY	11	MAIN LANDING GEAR
5	WASTE SERVICING PANEL	12	NOSE LANDING GEAR
6	POTABLE WATER SERVICING PANEL	13	PASSENGER DOOR
7	OXYGEN REFILL / REPLACE BOTTLE	14	SERVICE DOOR

EM170E2APM090007A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT

Scale: 1 Inch Equals 100 Feet

Figure 9.8

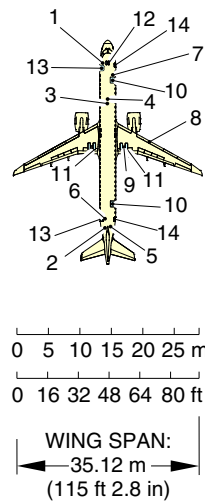



ITEM	DESCRIPTION	ITEM	DESCRIPTION
1	EXTERNAL POWER SUPPLY 115 VAC	8	PRESSURE REFUELING / DEFUELING
2	EXTERNAL POWER SUPPLY 28 VDC	9	GROUNDING POINT (RIGHT MLG)
3	HIGH PRESSURE AIR GROUND SUPPLY	10	CARGO DOOR
4	LOW PRESSURE AIR GROUND SUPPLY	11	MAIN LANDING GEAR
5	WASTE SERVICING PANEL	12	NOSE LANDING GEAR
6	POTABLE WATER SERVICING PANEL	13	PASSENGER DOOR
7	OXYGEN REFILL / REPLACE BOTTLE	14	SERVICE DOOR

EM170E2APM090008A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT

Scale: 1 to 500

Figure 9.9

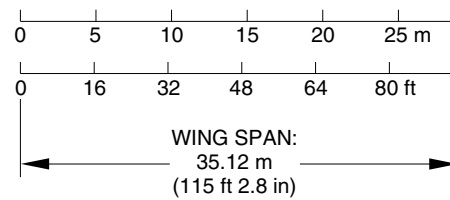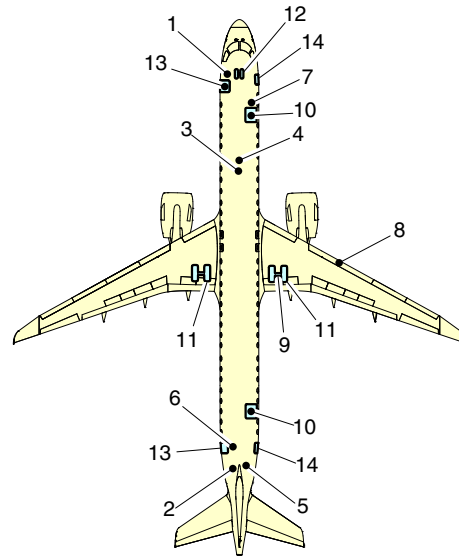


ITEM	DESCRIPTION	ITEM	DESCRIPTION
1	EXTERNAL POWER SUPPLY 115 VAC	8	PRESSURE REFUELING / DEFUELING
2	EXTERNAL POWER SUPPLY 28 VDC	9	GROUNDING POINT (RIGHT MLG)
3	HIGH PRESSURE AIR GROUND SUPPLY	10	CARGO DOOR
4	LOW PRESSURE AIR GROUND SUPPLY	11	MAIN LANDING GEAR
5	WASTE SERVICING PANEL	12	NOSE LANDING GEAR
6	POTABLE WATER SERVICING PANEL	13	PASSENGER DOOR
7	OXYGEN REFILL / REPLACE BOTTLE	14	SERVICE DOOR

EM170E2APM090009A.IDR

EFFECTIVITY: EMBRAER 195-E2 ACFT

Scale: 1 to 1000

Figure 9.10

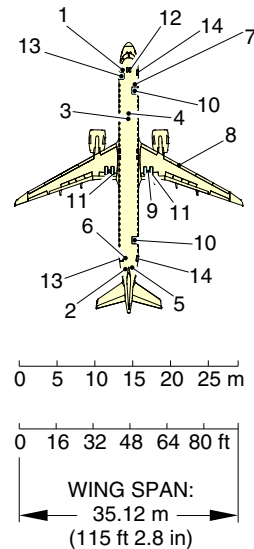

ITEM	DESCRIPTION	ITEM	DESCRIPTION
1	EXTERNAL POWER SUPPLY 115 VAC	8	PRESSURE REFUELING / DEFUELING
2	EXTERNAL POWER SUPPLY 28 VDC	9	GROUNDING POINT (RIGHT MLG)
3	HIGH PRESSURE AIR GROUND SUPPLY	10	CARGO DOOR
4	LOW PRESSURE AIR GROUND SUPPLY	11	MAIN LANDING GEAR
5	WASTE SERVICING PANEL	12	NOSE LANDING GEAR
6	POTABLE WATER SERVICING PANEL	13	PASSENGER DOOR
7	OXYGEN REFILL / REPLACE BOTTLE	14	SERVICE DOOR

